

BID PROPOSAL AND CONTRACT DOCUMENTS


JOHNSON STREET PARKING GARAGE REMEDIAL FLOOD REPAIRS

BID# L00120



Department of Public Works

DECEMBER 7, 2020

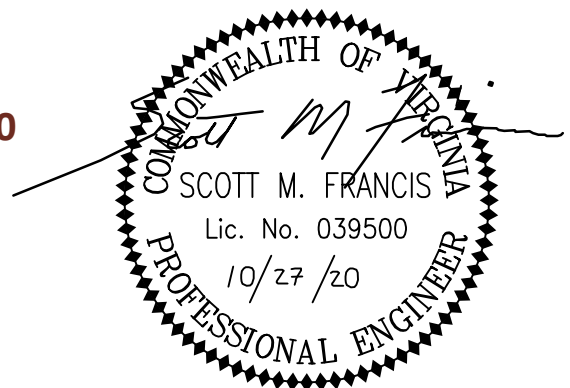

Contents

ADVERTISEMENT FOR BIDS	1
Bid Deadlines	3
INFORMATION FOR BIDDERS	4
BID FORMS.....	12
BID WORKSHEET.....	13
BID BOND.....	15
STATE CORPORATION COMMISSION FORM	16
CERTIFICATION REGARDING CONTACT WITH CHILDREN	17
NON-COLLUSION AFFIDAVIT	18
REFERENCE LIST.....	19
CONTRACT	20
PERFORMANCE BOND	23
PAYMENT BOND	26
GENERAL CONDITIONS	29
1. INTENT.....	29
2. INSURANCE	29
3. AVAILABILITY OF LANDS	31
4. EXISTING UTILITIES	31
5. SCHEDULE	32
6. SHOP DRAWING, MATERIAL DATA SHEETS	32
7. CONTRACTOR’S RESPONSIBILITIES	33
8. SUBCONTRACTS.....	36
9. OWNER’S RESPONSIBILITY	36
10. CHANGES IN WORK.....	37
11. CHANGES IN CONTRACT PRICE	37
12. CHANGES IN CONTRACT TIMES.....	38
13. INDEMNIFICATION	39
14. SEPARATE CONTRACTS	39
15. PAYMENT.....	39
16. DISCRIMINATION.....	40
17. CLAIM PROCESS.....	41
ESCROW ACCOUNT ELECTION FORM	42
ESCROW AGREEMENT.....	43
PROCUREMENT GUIDELINES.....	47
1. SUBMISSION AND RECEIPT OF BIDS:.....	47
2. BID SPECIFICATIONS	47
3. BRAND NAMES	47
4. DELIVERY POINT:	47
5. CASH DISCOUNTS:.....	47
6. LATEST MODEL/QUALITY	47
7. NOTICE OF AWARD	47
8. CHARGES AND PAYMENTS	47
9. TESTING AND INSPECTION.....	48
10. ASSIGNMENT OF CONTRACT	48
11. DEFAULT.....	49
12. TAXES	49

13.	INDEMNIFICATION	49
14.	LIABILITY AND LITIGATION	49
15.	COPYRIGHTS	49
16.	AWARDING THE CONTRACT	49
17.	PUBLIC INSPECTION OF PROCUREMENT RECORDS	50
18.	ETHICS IN PUBLIC CONTRACTING	50
19.	FORUM SELECTION	50
20.	PROMPT PAYMENT ACT	51
21.	REJECTION OF BIDS.....	51
22.	COSTS FOR BID PREPARATION.....	51
23.	APPROPRIATIONS	51
24.	ADDITIONAL FEDERAL GRANT PROVISIONS	51
25.	STATE CORPORATION COMMISSION IDENTIFICATION NUMBER.....	51
26.	ANTITRUST	51
27.	QUALIFICATIONS OF (BIDDERS/OFFERORS).....	52
28.	CANCELLATION OF THE CONTRACT	52
29.	AVAILABILITY OF FUNDS.....	52
30.	SELECTION PROCESS/AWARD	52
31.	SAFETY AND OSHA STANDARDS.....	52
32.	MODIFICATION & WITHDRAWAL OF BID	52
33.	CONTRACT TERM	52
34.	COMPENSATION AND RECORD KEEPING	53
35.	PAYMENT.....	53
36.	BID BOND.....	53
37.	PERFORMANCE AND PAYMENT BONDS	53
38.	BID ADDENDA	53
39.	INSURANCE REQUIREMENTS	53
40.	CONTRACT TERMINATION	54
41.	DEBARMENT STATUS	54
42.	CONTRACTOR UNDERSTANDING	54
43.	DRUG-FREE WORKPLACE	54
44.	NON-DISCRIMINATION	54
45.	PERMITS AND LICENSES	55
46.	NEGOTIATION WITH SUCCESSFUL BIDDER.....	55
47.	COOPERATIVE PROCUREMENT.....	55
48.	IMMIGRATION REFORM AND CONTROL ACT OF 1986.....	55
49.	CERTIFICATION OF INTEREST & RELATIONSHIPS	55
	WILEY WILSON PROJECT MANUAL.....	56

ADVERTISEMENT FOR BIDS

PROJECT: **JOHNSON ST. PARKING GARAGE – REMEDIAL FLOOD REPAIRS**
 City of Staunton, Virginia
 DATE DUE: December 7, 2020, 2:00 P.M.
 BID # L00120

The City of Staunton, Virginia, (hereinafter called the “**Owner**”, or “**Public Body**”) will receive sealed Bids for the furnishing of all labor, materials, supervision, and equipment necessary to complete above titled project at the City’s Purchasing Agent’s Office, located at 116 W. Beverley Street, City Hall, Third Floor, until **2:00 pm local time on December 7, 2020,** at which time the Bids will be publicly opened and read aloud. **Due to the Covid-19 state of emergency in the Commonwealth of Virginia, the City is following state guidance for conducting Bid Openings. No in-person attendees will be allowed at the Bid Opening.**

The Bid Opening will be hosted by the City via a Zoom Webinar. Actual opening of the bids will be performed in the Finance Department of City Hall with Chad Horvat, City of Staunton’s Finance Business Manager, along with one other person to witness. The Zoom Webinar will begin promptly at 2:00 p.m.

To join the webinar, please enter the following into your web browser:

<https://us02web.zoom.us/j/81614930816?pwd=V1A4NkY5NUxsdndSTS9SaW5hUWxSQT09>

Passcode: 373290

Or iPhone one-tap :

US: +13126266799,,81614930816#,,,,,0#,,373290# or
 +19292056099,,81614930816#,,,,,0#,,373290#

Or Telephone:

Dial(for higher quality, dial a number based on your current location):

US: +1 312 626 6799 or +1 929 205 6099 or +1 301 715 8592 or +1 346 248 7799 or +1 669 900 6833 or +1 253 215 8782

Webinar ID: 816 1493 0816

Passcode: 373290

International numbers available: <https://us02web.zoom.us/j/81614930816?pwd=V1A4NkY5NUxsdndSTS9SaW5hUWxSQT09>

A mandatory in-person pre-bid meeting will be held **November 19, 2020 at 10:30 a.m.** at the Gypsy Park Gym located at 116th Regimental Road, Staunton VA 24401.

The following general guidelines are applicable for the use of City facilities during COVID-19 and will be in effect for the Pre-Bid Meeting and the Site Visit:

- *No one with a fever or symptoms of COVID-19, or known exposure to a COVID-19 case in the prior 14 days, is permitted to enter.*

- *Visitors are expected to maintain physical distancing at all times of at least six feet from others.*
- *Visitors will be expected to comply with Virginia’s Executive Order 63, which requires that all patrons aged 10 and over must wear a face covering that covers their mouth and nose when inside a local government building.*
- *If a contractor is unable to attend the mandatory in-person meeting due to suspected COVID exposure or current illness, arrangements must be made with the City before the meeting.*

Participants are strongly encouraged to review the detailed use guidelines posted on the City website at <https://www.ci.staunton.va.us/departments/parks-recreation>. Guidelines will also be posted at the facility.

BIDS RECEIVED AFTER THE DATE AND TIME SPECIFIED WILL BE REJECTED.

BIDS MUST BE SEALED, MARKED, AND DELIVERED TO:

Mail to:

**City of Staunton
Chad Horvat
Finance Business Manager
P.O. Box 58
Staunton, VA 24402-0058
Phone: (540) 332-3819**

Overnight To:

**City of Staunton
Chad Horvat
Finance Business Manager
116 W. Beverley St., 3rd Floor
Staunton, VA 24401
Phone: (540) 332-3819**

The work for which bids are to be submitted consists of remedial repairs to the lower level of the Johnson Street Parking Garage located in downtown Staunton. Remedial repairs have been delineated on the construction drawings, but in general consist of demolition and replacement of the cast in place concrete slabs within the lowest level of the garage as well as a portion of the sidewalk and entrance. A more complete description of the work and full information for contract bidders is given in the Specifications and Contract Documents.

Bidder must agree to **fully complete the work within 160 working days**. Working days refer to Monday through Fridays, excepting weekends and City of Staunton holidays.

If any person contemplating submitting a bid for construction of the Work is in doubt as to the true meaning of any part of the proposed Contract Documents, or finds discrepancies on or omissions from any part of the proposed Contract Documents, he shall submit a written request. Every request for such interpretation should be emailed to johnstonjm@ci.staunton.va.us. All questions must be received no later than **November 20, 2020 by 1:00 P.M.**

Questions will be answered in Addendum format and posted at the City of Staunton website <https://www.ci.staunton.va.us/departments/finance/procurement> and at the Virginia State Procurement site (eVA) <https://mvendor.cgieva.com/Vendor/public/AllOpportunities>. It is the responsibility of all bidders to ensure that they have received all addenda and to include signed copies of any and all addenda with their bid submission. Any and all such interpretations and any supplemental instructions will be posted on the City website not later than close of business day on **November 24, 2020 by 5:00 P.M.**

Bid Security in the amount of five percent (5%) of the Bid shall be submitted with each Bid. Bid Bond must be in the form of a cashier's check or certified check payable to the City of Staunton.

Contractor registration in accordance with Title 2.2 Chapter 43, Code of Virginia is required.

The envelopes containing the Bids must be sealed, addressed to the **City of Staunton, City Purchasing Agent's Office, Staunton, Virginia 24401**, and marked as Bid for the **JOHNSON STREET PARKING GARAGE – REMEDIAL FLOOD REPAIRS**.

The bidder shall include in its Bid the following notation:

“Licensed Virginia Contractor No. _____” (issued to contractor by DPOR)

“State Corporation Commission Registration No. _____” (issued to contractor by the SCC)

The Bid shall remain subject to acceptance for sixty (60) days.

The Owner reserves the right to reject any and all Bids and to waive any minor non-substantive errors in the Bid.

Withdrawal of Bids due to error shall be subject to and in accordance with Section 2.2-4330 of the Code of Virginia and the Contract Documents.

The City of Staunton does not discriminate in the solicitation or awarding of contracts on the basis of race, religion, color, sex, national origin, age, disability, or any other basis prohibited by state or federal law.

BID DEADLINES

Invitation to Bid Posted	November 9, 2020
Mandatory In-Person Pre-Bid Meeting	November 19, 2020, 10:30 A.M. at Gypsy Hill Park
Questions Submission Deadline	November 20, 2020 by 1:00 PM
Addenda and Questions & Answers Posted	November 24, 2020 by 5:00 PM
Bid Submission Deadline	December 7, 2020 by 2:00 PM

END OF ADVERTISEMENT FOR BIDS

INFORMATION FOR BIDDERS

1. SECURING DOCUMENTS

- 1.1. The City of Staunton, Virginia, (hereinafter called the “**OWNER**”, or “**Public Body**”) invites bids on the form attached hereto, all blanks of which must be appropriately filled in. Bids will be received by the Owner in the City Purchasing Agent’s office, as specified in the Advertisement for Bid.
- 1.2. Bid documents are available for viewing and downloading from at the City of Staunton website <https://www.ci.staunton.va.us/departments/finance/procurement> and at the Virginia State Procurement site (eVA) <https://mvendor.cgieva.com/Vendor/public/AllOpportunities>.
- 1.3. The envelopes containing the bids must be sealed, addressed to City of Staunton at **City of Staunton, Purchasing Agent’s Office, Staunton, Virginia 24401** and designated as bid for: **Johnson Street Parking Garage – Remedial Flood Repairs**
- 1.4. The owner may consider informal any bid not prepared and submitted in accordance with the provisions hereof and may waive any informalities or reject any and all bids. Any bid may be withdrawn prior to the above scheduled time for the opening of bids or authorized postponement thereof.

2. PREPARATION OF BID AND SUBMISSION

Each bid must be submitted on the prescribed form in accordance with the following:

- 2.1. Each bid must be properly signed and with all blank spaces filled out, in ink or typewritten. The foregoing certification must be fully completed and executed when submitted. Do not make any modifications, erasures, deletions, additions or changes to the bid form. Unauthorized conditions, limitations, or provisions attached to the bid may be cause for rejections of the bid. Submit only the original signed copy of the bid.
- 2.2. Address bids to the Owner, and deliver to the address specified in the Advertisement for Bid. Bid on or before the day and hour set for opening the bids. Enclose each bid in an opaque, sealed envelope or box bearing on the outside the following:
 - 2.2.1. Project Title
 - 2.2.2. Name of the Bidder
 - 2.2.3. Bidder’s address
 - 2.2.4. Registered contractor’s Virginia Certification Number
 - 2.2.5. Date and hour of the bid opening.
- 2.3. The sealed envelope containing the bid must be enclosed in another envelope and mailed to the address as specified in the **Advertisement for Bids**. The City of Staunton is not responsible for delays in the delivery of the mail by the U.S. Postal Service, private couriers, or the inter-office mail system. It is the sole responsibility of the bidder to see that his bid is received on time. No faxed or emailed bid will be considered. No bids received after the time fixed for receiving them will be considered. Late or incomplete bids may be returned to the bidder. All expenses for making bids to the City shall be borne by the bidder.

- 2.4. Indicate receipt of issued addenda on the Bid Form. All Bidders are advised to check the City of Staunton’s website <https://www.ci.staunton.va.us/departments/finance/procurement> or the eVA website <https://mvendor.cgieva.com/Vendor/public/AllOpportunities> to assure that all Addenda have been received and that the cost consequences thereof have been included in the Bid. Addenda.
- 2.5. Any bid may be withdrawn prior to the above scheduled time for the opening of Bids or authorized postponement thereof.
- 2.6. Any bid received after the time and date specified shall not be considered.
- 2.7. Bid shall remain subject to acceptance for sixty (60) days.
- 2.8. The following documents fully completed and signed where appropriate are required for a responsive Bid:
 - 2.8.1. Signed Bid Form which includes acknowledgement of Addenda
 - 2.8.2. Bid Bond
 - 2.8.3. State Corporation Commission Registration
 - 2.8.4. Non-Collusion Affidavit
 - 2.8.5. Reference List

3. SUBCONTRACTS

- 3.1. The bidder is specifically advised that any person, firm, or other party to whom is proposed to award a subcontract under this contract must be acceptable to the Owner. The bidder must name the subcontractor(s), and the City reserves the right to determine whether any named subcontractor is fit and capable to perform the required work.

4. METHOD OF BIDDING

- 4.1. This is a unit price bid for the **JOHNSON STREET PARKING GARAGE –REMEDIAL FLOOD REPAIRS.** (See Bid Schedule.)
- 4.2. Although the bid is based upon unit prices, many items are to be priced under lump sum designations. It is the bidder’s responsibility to verify the exact scope of work for all items in order to establish the bid price.

5. QUALIFICATIONS OF BIDDER

- 5.1. The Owner may make such investigations as he deems necessary to determine the ability of the bidder to perform the work, and the bidder shall furnish to the Owner all such information and data for this purpose as the Owner may request. The Owner reserves the right to reject any bid if the evidence submitted by, or investigation of, such bidder indicates that the bidder is not properly qualified to carry out the obligations of the contract and to complete the work contemplated therein. Conditional bids will not be accepted.
- 5.2. Bids will only be accepted from Contractors who are experienced in and actively engaged in the type of construction of the item(s) called for in the bid. No bid will be accepted from or contract awarded to any person, firm, or corporation that is in arrears or is in default to the City upon any debt or contract, or that is a defaulter, as surety or otherwise, upon any obligation to said City or had failed to perform faithfully any previous contract with the City.

- 5.3. Bidders must certify in the bid form that they are not currently barred from bidding on contracts by any agency of the Commonwealth of Virginia or any federal agency.
- 5.4. Pursuant to Code of Virginia, §2.2-4311.2 subsection B, a bidder or offeror organized or authorized to transact business in the Commonwealth pursuant to Title 13.1 or Title 50 is required to include in its bid or proposal the identification number issued to it by the State Corporation Commission (SCC). Any bidder or offeror that is not required to be authorized to transact business in the Commonwealth as a foreign business entity under Title 13.1 or Title 50 or as otherwise required by law is required to include in its bid or proposal a statement describing why the bidder or offeror is not required to be so authorized.

6. BID SECURITY

- 6.1. Each bid must be accompanied by a Bid Bond in the amount of five percent (5%) of the bid submitted, or a certified check of the Bidder in an amount not less than five percent (5%) of the amount of the bid, payable to the order of the City of Staunton, Virginia. Such bid bonds or checks will be returned to all, except the three bidders submitting the most favorable bids, within three (3) days after the formal opening of the bids. The remaining Bid Bonds or checks will be returned to the three most favorable bidders within forty-eight (48) hours after the Owner and the accepted Bidder have executed the Contract, or if no contract has been so executed, within sixty (60) days after the date of the opening of the bids.

7. LIQUIDATED DAMAGES FOR FAILURE TO ENTER INTO CONTRACT

- 7.1. The successful bidder, upon his failure or refusal to execute and deliver the contract and bonds required within 10 days after he has received notice of the acceptance of his bid, shall forfeit to the Owner, as liquidated damages for such failure or refusal, the security deposited with his bid.

8. TIME AND COMPLETION AND LIQUIDATED DAMAGES

- 8.1. Bidder must agree to commence work on or before a date to be specified on a written “Notice to Proceed” from the OWNER.
- 8.2. Bidder must agree to **fully complete the work AS INDICATED IN THE ADVERTISEMENT FOR BID.**
- 8.3. OWNER and CONTRACTOR stipulate that **TIME IS OF THE ESSENCE** and delay by the CONTRACTOR in completion would have significant adverse consequences for the PROJECT; that, however, the actual damages to OWNER from such delay are uncertain and would be impossible and not susceptible to reasonable determination; and that liquidated damages of such failure by CONTRACTOR to perform in a timely manner are a reasonable way and not a penalty to address such adverse consequences. CONTRACTOR also stipulates that it shall not challenge, either directly or indirectly, this liquidated damages provision. OWNER, therefore, may require CONTRACTOR to pay liquidated damages of **\$1,000** per day for the CONTRACTOR’s failure to perform timely in strict accordance with the CONTRACT. OWNER may deduct any liquidated damages from amounts due to CONTRACTOR and, otherwise OWNER shall be entitled to receive interest at the rate of 5% until deducted or paid. Liquidated damages shall be, other than for delay, in addition to any other entitlement by OWNER to damages and other remedies for any other damage, loss, or injury for which CONTRACTOR may be responsible.

9. EXAMINATION OF DOCUMENTS AND SITE OF WORK

- 9.1. Each bidder must inform himself fully of the conditions relating to the construction of the project and the employment of labor thereon. Failure to do so will not relieve a successful bidder of this obligation to furnish all material and labor necessary to carry out the provisions of his contract. Insofar as possible, the contractor, in carrying out his work, must employ such methods or means as will not cause any interruption of or interference with the work of any other contractor.
- 9.2. Before submitting a bid, each bidder shall carefully examine and read the Bid Documents, Construction Plans, Project Manual, and all other proposed Contract Documents (including all addenda), and shall visit the site of the work. Each bidder shall fully inform himself prior to bidding as to existing conditions and limitations under which the work is to be performed, and shall include in his bid a sum to cover the cost of items necessary to perform the Work as set forth in the proposed contract documents. No allowance will be made to a bidder because of lack of such examination and knowledge. The submission of a bid will be considered as conclusive evidence that the bidder has made such examination.
- 9.3. Attention is particularly called to those parts of the Contract Documents and Specifications, which deal with the following:
 - 9.3.1. Inspection and testing of materials.
 - 9.3.2. Insurance requirements (Section 2-Insurance of General Conditions)
- 9.4. The failure or omission of any bidder to examine any form instrument or document shall in no way relieve any bidder from any obligation in respect of his bid.

10. ADDENDA AND INTERPRETATIONS OF CONTRACT DOCUMENTS PRIOR TO BIDDING

- 10.1. No interpretation of the meaning of the plans, specifications or other pre-bid documents will be made to any bidder orally.
- 10.2. If any person contemplating submitting a bid for construction of the Work is in doubt as to the true meaning of any part of the proposed Contract Documents, or finds discrepancies on or omissions from any part of the proposed Contract Documents, he shall submit a written request. Every request for such interpretation should be emailed to johnstonjm@ci.staunton.va.us or mailed to address in the Advertisement for Bid. All questions must be received no later than **1:00 p.m. on November 20, 2020.**
- 10.3. Questions will be answered in Addendum format and posted as outlined in the invitation to bid, at the City of Staunton website <https://www.ci.staunton.va.us/departments/finance/procurement> and at the eVA website <https://mvendor.cgieva.com/Vendor/public/AllOpportunities>. It is the responsibility of all bidders to ensure that they have received all addenda and to include signed copies of any and all addenda with their bid submission. Any and all such interpretations and any supplemental instructions will be posted on the City website not later than close of business day on **November 24, 2020.**
- 10.4. Failure of any bidder to receive any such addendum or interpretation shall not relieve such bidder from any obligation under this bid as submitted. All addenda so issued shall become part of the contract documents.

11. SECURITY AND FAITHFUL PERFORMANCE

- 11.1. Simultaneously with his delivery of the executed contract, the Contractor shall furnish a surety bond or bonds as security for faithful performance of this contract and for the payment of all persons performing labor on the project under the contract and furnishing materials in connection with this contract.
- 11.2. Both payment bond and performance bond shall be in the amount of 100% of the contract price and shall list the Owner, City of Staunton, as beneficiary.
- 11.3. All bonds shall be on forms provided in the Contract Documents and written by companies LICENSED TO DO BUSINESS IN VIRGINIA and shall be administered through agent(s) registered in Virginia.

12. POWER OF ATTORNEY

- 12.1. Attorneys-in-fact who sign bid bonds or contract bonds must file with each bond a certified and effectively dated copy of their power of attorney.

13. LAWS AND REGULATIONS

- 13.1. The bidder's attention is directed to the fact that all applicable State laws, municipal ordinances, and the rules and regulations of all authorities having jurisdiction over construction of the contract will be deemed to be included in the contract as though herein written out in full.
- 14.2. Contractor shall comply with Federal and State Requirements.

14. METHOD OF AWARD – LOWEST QUALIFIED BIDDER

- 14.1. The contract will be awarded on the basis of the sum of the Base Bid and the accepted Alternates.
- 14.2. The award will be made to the lowest responsible bidder whose bid conforms to the Advertisement, these Instructions and whose qualifications indicate the award will be most advantageous to the City.
- 14.3. The City reserves the right to reject any or all offers and to waive informalities and minor irregularities in offers received.
- 14.4. The City will notify all bidders of the award and return Bid Sureties to all but the successful bidder.
- 14.5. Should the lowest bid for Base Bid exceed the City's budget, the City may proceed with negotiations with the lowest bidder for the Base Bid in accordance with section 2.2-4318 of the Code of Virginia to obtain a contract price within the funds available to the City. For the purpose of determining when such negotiations may take place, the term "available funds" shall mean those funds which were budgeted by the City for this contract (including all grant funding) prior to issuance of the written Invitation for Bids. Negotiations with the low bidder may include both modifications of the bid price and Scope of Work/Specifications to be performed. The City shall initiate such negotiations by written notice to the lowest responsive, responsible bidder that its bid exceeds the available funds and that the City wishes to negotiate a lower contract price. The times, places, and manner of negotiations shall be agreed to by the City and the lowest responsive bidder.

15. EXECUTION OF CONTRACT

- 15.1. The form of the Contract, which the successful bidder will be required to execute, is included in the Bid Documentation.
- 15.2. After notice from the City, the successful bidder has fourteen (14) business days to enter into a Contract or forfeit as liquidated damages the security deposit. By executing the Contract, the Contractor certifies that he has reviewed the Contract Documents and the project area and accepts the conditions of each.
- 15.3. At or prior to delivery of the signed Contract, the bidder to whom the Contract is awarded shall deliver to the Owner the following documents, as required by the Owner and the Contract Documents:
 - 15.3.1. Certificates of Insurance and Endorsement
 - 15.3.2. Labor and Materials Payment Bonds
 - 15.3.3. Performance Bond
 - 15.3.4. City Business License
 - 15.3.5. Virginia State Contractor's License Number
- 15.4. Bonds and Certificates of Insurance shall be approved by the Owner before the successful bidder may proceed with the Work. Failure or refusal to provide Bonds or Certificates of Insurance and Endorsement in a form satisfactory to the Owner shall subject the successful bidder to loss of time from the allowable construction period equal to the time of delay in furnishing the required material.

16. OBLIGATION OF BIDDER

- 16.1. At the time of the opening of bids, each bidder will be presumed to have inspected the site and to have read and to be thoroughly familiar with the plans and contract documents (including all addenda).
- 16.2. The failure or omission of any bidder to examine any form instrument or document shall in no way relieve any bidder from any obligation in respect of his bid.
- 16.3. Under Section 2.2-4330, Procedure (A(i)) of the Code of Virginia, a bidder for a contract with the State or any department, institution or agency thereof, or with any county, city, town, school board, or any agency thereof for the construction, demolition, alteration, repair or improvement may withdraw his bid from consideration if the price bid was substantially lower than the other bids due solely to a mistake therein, provided the bid was submitted in good faith, and the mistake was a clerical mistake as opposed to a judgment mistake, and was actually due to an unintentional arithmetic error or an unintentional omission of a quantity of work, labor, or material made directly in the compilation of a bid, evidenced by the inspection of original work papers, documents and materials used in the preparation of the bid sought to be withdrawn. The bidder must give notice in writing of his claim of right to withdraw his bid within two (2) business days after the conclusion of the bid opening procedure.
- 16.4. SCC Requirement: Pursuant to Code of Virginia, §2.2-4311.2 subsection B, a bidder or offeror organized or authorized to transact business in the Commonwealth pursuant to Title 13.1 or Title 50 is required to include in its bid or proposal the identification number issued to it by the State Corporation Commission (SCC). Any bidder or offeror that is not required to be authorized to transact business in the Commonwealth as a foreign business entity under Title 13.1 or Title 50

or as otherwise required by law is required to include in its bid or proposal a statement describing why the bidder or offeror is not required to be so authorized

17. ADJUSTMENT OF CONTRACT

- 17.1. The Owner reserves the right to expand this contract to include work of the type defined in the project specifications, to other areas of the City. This expansion would be contingent upon the Contractor agreeing to perform the additional work at the same contract prices found in the proposal for the original contract.
- 17.2. The owner reserves the right to make, at any time during the progress of the work, such increases or decreases in quantities as deemed in the best interest of the Owner. Adjustments of contract unit prices will not be considered for overruns or underruns of the original bid quantities. Unit price adjustments will not be made in the event of the elimination of any other associated bid item.

18. PRE-BID MEETING

- 18.1. A **mandatory** pre-bid meeting will be held on November 19, 2020 at 10:30 a.m. (See **Advertisement for Bid** for details.)

19. CITY BUSINESS LICENSE

- 19.1. City of Staunton Business License is required for successful award of this project. At or prior to delivery of the signed Contract, the bidder to whom the Contract is awarded shall deliver to the Owner a copy of their City Business License. The bidder shall ensure that the Business License indicates a basis amount equal to or greater than the awarded Contract value. For information on City Business Licenses contact the Staunton Commissioner of Revenue office at 540- 332-3829.

20. STANDARDS AND SPECIFICATIONS

- 20.1. Applicable work in this project shall conform to the current Virginia Department of Transportation (VDOT) Road and Bridge specifications, the current VDOT Road and Bridge Standards, the current Virginia Erosion and Sediment Control handbook, the current Virginia Erosion and Sediment Control regulations and the current City of Staunton Design and Construction Standards Manual.

21. CONSIDERATION OF PROJECT COMPLEXITIES

- 21.1. In preparing this bid, Contractor shall understand and account in their costs for the complexities involved in administering the construction required by this Contract. Contractor shall be aware that the project area receives regular traffic during the work day. Contractor shall accommodate such traffic through and around the work area in a safe and well-marked manner.
- 21.2. Submission of a bid shall be an affirmation that the Contractor understands these complexities and difficulties associated with this project, that he has included in his bid a sufficient dollar amount to compensate for the additional time and effort these complexities and difficulties will require on his part, and that he understands that the Owner will not accept any claim for time extension or additional costs associated with them.

22. INSURANCE REQUIREMENTS

- 22.1. By signing and submitting a bid or proposal the contractor certifies that if awarded the contract, they will have the insurance coverages as outlined in **Section 2 - Insurance** of the General Conditions at the time the contract is awarded. If any subcontractors are involved, the subcontractor will have the same insurance. The contractor further certifies that they or any subcontractor will maintain these coverages during the entire term of the contract.

BIDDER STATEMENT

We understand the Insurance Requirements of these specifications and will comply in full if awarded this contract.

Signature: _____ Date: _____

Name: _____ Title: _____

Name of Firm: _____

This document must be completed & returned with bid submission.

END OF INSTRUCTIONS TO BIDDERS

BID FORMS

To: City of Staunton
City Purchasing Agent's Office
Third Floor, City Hall
P.O. Box 58
Staunton, Virginia 24402

Gentlemen:

The undersigned, as Bidder, does hereby declare that the only person, persons, company or parties interested in this Bid are named herein; that this Bid is made and that the Contract will be executed without collusion with any other person or persons presenting any Bid for the same work, labor and materials; that this Bid is in all respects fair and just and that no person prohibited therefrom by law is directly or indirectly interested in this Bid, nor in the labor and materials to which it relates, nor in any portion of the profits thereof.

The undersigned does further declare that he has personally examined the site of the proposed work and made such investigation as is necessary to determine the general and local conditions and the character of the work to be encountered; that he has carefully examined each and every item of the annexed Contract Documents and the Plans and Specifications pertaining hereto, and that he fully understands the same, and will make no claim, other than as stated therein, because of any misunderstanding or misconception concerning the nature, character or amount of work to be done.

The undersigned does hereby offer and agree to execute and perform the Contract attached hereto, and of which this Bid forms a part; and to furnish all of the labor, materials, tools, equipment, transportation and superintendence for the construction; in strict conformity with the drawings and specifications. The bidder understands that the quantities shown in the Bid Schedule are approximate only; and are subject to either increase or decrease based on the work shown on the Drawings and for changes in the work as directed by the Owner and that should the quantities of any of the items of work be increased, the undersigned proposes to do the additional work at the unit price set out herein, and should the quantities be decreased, he also understands that payment will be made on the actual quantities installed at the unit prices, and will make no claim for the anticipated profits for any decrease in the quantities. Actual quantities will be determined upon completion of the work. Lump sum bid items will not be adjusted.

This document must be completed & returned with bid submission.

BID WORKSHEET
Johnson Street Parking Garage – Remedial Repairs

BID NO.	ITEM	UNITS	ESTIMATED QUANTITY	UNIT PRICE	TOTAL PRICE
1.	Demolition and Replacement of Concrete Structural Slab including metal grating slab openings	SF	320		
2.	Demolition and Replacement of Concrete Slab on Grade	SF	3150		
3.	Demolition and Replacement of Concrete Entranceway slab	SF	200		
4.	Demolition and Replacement of Concrete Curb and Gutter	LF	28.5		
5	Demolition and Replacement of Concrete Sidewalk	SF	250		
6.	Re-striping parking garage within area of work	LS	1		

Abbreviations: EA – Each, LF – Linear Feet, LS – Lump Sum, SF – Square Feet

Subtotal _____

TOTAL BASE BID

WORDS

FIGURES

AMOUNTS ARE TO BE SHOWN IN BOTH WORDS AND FIGURES.

IN CASE OF DISCREPANCY, THE AMOUNT SHOWN IN WORDS WILL GOVERN.

The undersigned agrees to complete the work enumerated herein **in accordance with Paragraph 8 of Instructions to Bidders**. It is expressly understood and agreed that the time of beginning, rate of progress, and the date of completion are essential conditions, and that in the event of failure to complete the work within the above specified time, the Contractor will be liable for the payment of liquidated damages as provided in **Paragraph 8 of Instruction to Bidders**. Extensions may be granted, upon written request, for inclement weather and for any other cause not the fault of the Contractor. The City reserves the right to shut the project down for extended periods due to inclement weather. Deadline extensions will be made to equally compensate for periods of shut down.

The undersigned likewise agrees that he will execute and deliver the Contract hereto attached within fourteen (14) business days, and City of Staunton holidays excepted, after notification of the acceptance of this Bid and award of the Contract; and will furnish a performance and a payment bond for the total amount of the accepted Bid on the forms provided in the Contract Documents, satisfactory to the Owner as surety for the faithful performance and completion of the Contract and the payment of all subcontractors, material dealers and labor.

The undersigned certifies that he understands that it is the intent of the drawings, and the Contract Documents, that the work be completed in every respect and that no additional compensation will be allowed for minor tasks necessary to completely perform the work.

The undersigned acknowledges Addenda:

Addenda No. _____ Addenda _____

Addenda No. _____ Addenda _____

The undersigned has checked carefully all the above figures and understands that the Owner will not be responsible for any errors or omissions in making up this Bid.

Contractor

Registered Virginia Contractor's License No.

Classification Expiration

SCC Number

Contractor's IRS Number

Dates this ____ day of ____ 2020

By: _____

Printed Name: _____

Title: _____

Address: _____

Telephone: _____

This document must be completed & returned with bid submission.

END OF BID FORMS & WORKSHEETS

BID BOND

KNOW ALL MEN BY THESE PRESENTS, that we, the undersigned

_____ as Principal, and
 _____ as Surety, are hereby held and firmly
 bound unto _____ as Owner in the penal sum of _____
 _____ for the payment of which, well and truly to be made,
 we hereby jointly and severally bind ourselves, our heirs, executors, administrators, successors and
 assigns.

Signed, this _____ day of _____, 20____

The condition of the above obligation is such that whereas the Principal has submitted to
 _____ a certain bid attached hereto
 and hereby made a part of hereof to enter into a contract in writing, for the _____

NOW THEREFORE,

- (a) If said Bid shall be rejected, or in the alternate
- (b) If said Bid shall be accepted and the Principal shall execute and deliver a contract in the Form of Contract attached hereto (properly completed in accordance with said Bid) and shall furnish a bond for his faithful performance of said contract, and for the payment of all persons performing labor or furnishing materials in connection therewith, and shall in all other respects perform the agreement created by the acceptance of said Bid.

Then this obligation shall be void, otherwise the same shall remain in force and effect; it being expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated.

The surety for value received, hereby stipulates and agrees that the obligations of said Surety and its bond shall be in no way impaired or affected by an extension of the time within which the Owner may accept such Bid; and said Surety does hereby waive notice of any such extension.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers, the day and year first set forth above.

(L.S.)

Principal

Surety

By: _____

Seal

This document must be completed & returned with bid submission.

END OF BID BOND

STATE CORPORATION COMMISSION FORM

Virginia State Corporation Commission (“SCC”) registration information:

The undersigned Offeror:

- ☐ is a corporation or other business entity with the following SCC identification number:
_____ -OR-
- ☐ is not a corporation, limited liability company, limited partnership, registered limited liability partnership, or business trust -OR-
- ☐ is an out-of-state business entity that does not regularly and continuously maintain as part of its ordinary and customary business any employees, agents, offices, facilities, or inventories in Virginia (not counting any employees or agents in Virginia who merely solicit orders that require acceptance outside Virginia before they become contracts, and not counting any incidental presence of the Offeror in Virginia that is needed in order to assemble, maintain, and repair goods in accordance with the contracts by which such goods were sold and shipped into Virginia from bidder’s out-of-state location) -OR-
- ☐ is an out-of-state business entity that is including with this bid an opinion of legal counsel which accurately and completely discloses the undersigned Offeror’s current contacts with Virginia and describes why those contacts do not constitute the transaction of business in Virginia within the meaning of § 13.1-757 or other similar provisions in Titles 13.1 or 50 of the Code of Virginia. Attach opinion of legal counsel to this form.

****NOTE**** >> Check the following box if you have not completed any of the foregoing options but currently have pending before the SCC an application for authority to transact business in the Commonwealth of Virginia and wish to be considered for a waiver to allow you to submit the SCC identification number after the due date for proposals (the Commonwealth reserves the right to determine in its sole discretion whether to allow such waiver): ☐

Signature: _____ Date: _____

Name: _____

Print

Title: _____

Name of Firm: _____

****This document must be completed & returned with bid submission.****

END OF STATE CORPORATION COMMISSION FORM

CERTIFICATION REGARDING CONTACT WITH CHILDREN

Contractor acknowledges that, to the extent the implementation of this contract requires Contractor, Contractor's employees or other persons within Contractor's control to have direct contact with Staunton Public Schools' students, the Contractor hereby certifies, and is deemed to be continuously certifying, that neither Contractor, Contractor's employees nor any person who will have direct contact with students on school property during regular school hours or during school-sponsored activities have not been convicted of a felony or any offense involving the sexual molestation or physical or sexual abuse or rape of a child.

Contractor understands that, pursuant to Code of Virginia §22.1-296.1, making a materially false statement regarding offenses which are required to be included in the certification referenced above is a Class 1 misdemeanor and, upon conviction, the fact of such conviction shall be grounds for the revocation of the contract to provide such services and, when relevant, the revocation of any license required to provide such services. Staunton Public Schools shall not be liable for materially false statements regarding the certifications required under this Contract.

It is certified, now and on a continuous basis, that none of our employees, or any person on our behalf who will have direct contact with students under this contract, has been convicted of a felony or any offense involving the sexual molestation or physical or sexual abuse or rape of a child.

Contractor: _____

By: _____

Name: _____

Title: _____

Date: _____

This document must be completed & returned with bid submission.

END OF CERTIFICATION REGARDING CONTACT WITH CHILDREN

NON-COLLUSION AFFIDAVIT

Under oath, I hereby affirm under penalty of perjury:

- (1) That I am the bidder or a partner of the bidder, or an officer or employee of the bidding corporation with authority to sign on its behalf;
- (2) That the attached bid or bids have been arrived at by the bidder and have been arrived at and submitted without collusion or any design to limit bidding or competition;
- (3) That the contents of the bid or bids have not been communicated to any person not an employee or agent of the bidder on any bid furnished with the bid or bids, and will not be communicated to any such person prior to the official opening of the bid or bids; and
- (4) That I have fully informed myself regarding the accuracy of the statements made in this affidavit.

Signed _____

Title _____

Firm Name _____

CITY / COUNTY OF _____

STATE OF _____, to wit:

I, _____, a Notary Public, do certify that

_____ whose name is signed to the foregoing

has this date acknowledged the same before me in my City foresaid.

Given under my hand this _____ day of _____, 20____.

My Commission expired _____.

Notary Public

This document must be completed & returned with bid submission.

END OF NON-COLLUSION AFFIDAVIT

REFERENCE LIST

Indicate below a listing of at least three (3) current or recent client references, either commercial or governmental, that your company is servicing, has serviced, or has provided similar goods or services.

Reference #1

Company: _____	Contact Person: _____
Phone #: _____	Email: _____
Project: _____	Dates of Service: _____

Reference #2

Company: _____	Contact Person: _____
Phone #: _____	Email: _____
Project: _____	Dates of Service: _____

Reference #3

Company: _____	Contact Person: _____
Phone #: _____	Email: _____
Project: _____	Dates of Service: _____

Indicate below a listing of at least one (1) current or recent client/account that has terminated your company's services within the last two (2) years. Account(s) are preferred to be government accounts of a similar size and nature.

Terminated Reference *(if Applicable)*

Reference #1

Company: _____	Contact Person: _____
Phone #: _____	Email: _____
Project: _____	Dates of Service: _____

Company Background *(Attach additional sheets if necessary.)*

Number of Years in Business: _____

Overview of Work History, Experience & Background of Company:

This document must be completed & returned with bid submission.

END OF REFERENCE LIST

CONTRACT

THIS CONTRACT, dated this _____ day of _____, **2020**, for identification, is made by and between the **CITY OF STAUNTON, VIRGINIA** (the “OWNER”), a municipal corporation of the Commonwealth of Virginia acting by and through its City Manager, and _____ (the “CONTRACTOR”), a _____ Corporation licensed and registered to do business in the Commonwealth of Virginia, (SCC # _____).

WITNESSETH: That for and in consideration of the payments and contract hereinafter mentioned, to be made and performed by the OWNER, the CONTRACTOR hereby agrees with the OWNER to commence and complete the construction described as follows:

PROJECT: JOHNSON STREET PARKING GARAGE – REMEDIAL FLOOD REPAIRS

Hereafter called the **PROJECT**, for a sum not to exceed _____ under the terms of the contract documents.

For said price, the CONTRACTOR is to furnish all materials, labor, superintendence, equipment, tools, machinery, and other accessories and services necessary to complete the said PROJECT.

The Contract Documents, which comprise the entire CONTRACT between OWNER and CONTRACTOR, consist of the following:

- 1. This Contract**
- 2. Instructions for Bidders**
- 3. Bid and Addenda**
- 4. Performance and Payment Bonds**
- 5. General Conditions**
- 6. Special & Supplemental Conditions**
- 7. Technical Specifications**
- 8. Standard Details**
- 9. Plan Sheets**

Said documents are those prepared by the City Engineering Department or its assigned representative for the specific PROJECT.

The OWNER agrees to make payment to the CONTRACTOR in accordance with the General Conditions and for the price specified in the bid for work completed as stated above as the sum to be paid.

OWNER and CONTRACTOR stipulate that **TIME IS OF THE ESSENCE** and that delay by the CONTRACTOR in completion would have significant adverse consequences for the PROJECT; that, however, the actual damages to OWNER from such delay are uncertain and would be impossible and not susceptible to reasonable determination; and that liquidated damages of such failure by CONTRACTOR

to perform in a timely manner are a reasonable way and not a penalty to address such adverse consequences. CONTRACTOR also stipulates that it shall not challenge, either directly or indirectly, this liquidated damages provision. OWNER, therefore, may require CONTRACTOR to pay liquidated damages of **\$1,000** per day for the CONTRACTOR's failure to perform timely in strict accordance with the CONTRACT.

OWNER may deduct any liquidated damages from amounts due to CONTRACTOR and, otherwise OWNER shall be entitled to receive interest at the rate of 5% until deducted or paid. Liquidated damages shall be, other than for delay, in addition to any other entitlement by OWNER to damages and other remedies for any other damage, loss, or injury for which CONTRACTOR may be responsible.

The OWNER agrees to pay the CONTRACTOR in current funds for the performance of the contract, subject to additions and deductions as provided in the Proposal and to make payments on account thereof as provided in the General Conditions and the Special and Supplemental Conditions.

IN WITNESS WHEREOF, the parties to these presents have executed this contract, in the year and day first above mentioned.

Public Works Director's Initials

Director of Finance Initials

City Manager or Authorized Representative

Approved as to Legality and Form:

City Attorney

(Seal)

Contractor

By: _____

Secretary

Witness

Title

Address

Note: Secretary of the OWNER should attest. If CONTRACTOR is a corporation.

END OF CONTRACT

PERFORMANCE BOND

KNOW ALL MEN BY THESE PRESENTS: That

(Insert full name or legal title and address of Contractor)

as Principal, hereinafter called Contractor, and

(Insert full name or legal title and address of Surety)

as Surety, hereinafter called Surety, are held and firmly bound unto

(Insert name and address of Owner)

As Obligee in the amount of _____ dollars (\$ _____)
 (Insert sum equal to contract price in both words and figures)

For the payment whereof Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS,

Contractor has by written agreement dated _____, 20__ entered into a Contract with the Owner for:

JOHNSON STREET PARKING GARAGE –REMEDIAL FLOOD REPAIRS
Staunton, Virginia

In accordance with Drawings and Specifications prepared by:

Wiley|Wilson
127 Nationwide Drive
Lynchburg, Virginia 24502

for:

City of Staunton Public Works Division
116 W. Beverley Street
Staunton, Virginia 24401

Which Contract is by reference made a part hereof, and is hereinafter referred to as the Contract.

NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION is such that, if Contractor shall promptly and faithfully perform said Contract, in strict conformity with the Drawings, Specifications and Contract Documents, then this obligation shall be null and void. Otherwise, it shall remain in full force and effect for one (1) year after completion of all work:

- a) The Surety hereby waives notice of any alternation or extension of time made by the Owner.
- b) Any suit under this bond must be instituted, (1) before the expiration of one (1) year after completion of the Contract including the expiration of all warranties and guarantees, or (2) before the expiration of one (1) year after a defect or breach of warranty is discovered, if the action be for such.
- c) No right of action shall accrue on this bond to or for the use of any Person or corporation other than the Owner named herein or the successors or assigns of Owner and every action brought hereon shall be filed and maintained solely in the General District Court or the Circuit Court of the City of Staunton, Virginia.

SIGNED AND SEALED THIS _____ day of _____, 20____

In the presence of :

_____ WITNESS

_____ WITNESS

Surety:

(Attach power of attorney)

(SEAL)

PRINCIPAL

BY TITLE

SURETY

BY TITLE

CONTRACTOR'S PERFORMANCE BOND

Project: _____

END OF PERFORMANCE BOND

PAYMENT BOND

KNOW ALL MEN BY THESE PRESENTS: That

(Insert full name or legal title and address of Contractor)

as Principal, hereinafter called Contractor, and

(Insert full name or legal title and address of Surety)

as Surety, hereinafter called Surety, are held and firmly bound unto

(Insert name and address of Owner)

As Obligee for the use and benefit of claimants as herein below defined in the amount of _____ dollars (\$_____)

(Insert sum equal to contract price in both words and figures)

For the payment whereof Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS,

Contractor has by written agreement dated _____, 20__ entered into a Contract with the Owner for:

JOHNSON STREET PARKING GARAGE – REMEDIAL FLOOD REPAIRS

Staunton, Virginia

In accordance with Drawings and Specifications prepared by:

Wiley|Wilson
127 Nationwide Drive
Lynchburg, Virginia 24502

for:

**City of Staunton Public Works Division
116 W. Beverley Street
Staunton, Virginia 24401**

Which Contract is by reference made a part hereof, and is hereinafter referred to as the Contract.

NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION is such that, if Contractor shall promptly make payment to all claimants as herein defined, for all labor and materials used or reasonably required for use in the performance of the Contract, then this obligation shall be void. Otherwise it shall remain in full force and effect, subject, however, to the following conditions:

- d) A claimant is defined as one having a direct contract with the Contractor for labor, material, or both, used or reasonably required for use in performance of the Contract, labor and material be construed to include the part of water, gas, power, light, heat, oil. gasoline, telephone service, or rental of equipment directly applicable to the Contract.
- e) The above named Contractor and Surety hereby jointly and severally agree with the Owner that every claimant as herein defined, who has not been paid in full before the expiration of a period of ninety (90) days after the date on which the last of such claimant's work of labor was done or performed, or materials were furnished by such claimant, may sue on this bond, prosecute the suit to final judgment for such sum or sums as may be justly due claimant and have execution thereon. The Owner shall not be liable for the payment of any costs or expenses of any such suit.
- f) Any suit or action hereunder by any claimant:
 - 1. Shall not be commenced after the expiration of one (1) year following the date on which the claimant last performed labor or last supplied materials.
 - 2. Shall be filed and maintained solely in the General District Court or the Circuit Court of the City of Staunton, Virginia.

SIGNED AND SEALED THIS _____ day of _____, 20____

In the presence of:

_____ WITNESS

_____ WITNESS

Surety:

(Attach power of attorney)

(SEAL)
PRINCIPAL

BY TITLE

SURETY

BY TITLE

CONTRACTOR'S LABOR AND MATERIAL PAYMENT BOND

Project: _____

END OF PAYMENT BOND

GENERAL CONDITIONS

1. INTENT

- 1.1. The Contract Documents comprise the entire Contract between the City and Contractor concerning the Work. The Contract Documents are complementary; what is called for by one is as binding as if called for by all. The Contract Documents will be construed in accordance with the law of the place of the Project.
- 1.2. It is the intent of the Contract Documents to describe a functionally complete Project (or part thereof) to be constructed in accordance with the Contract Documents. Any Work, materials or equipment that may reasonably be inferred from the Contract Documents or from prevailing custom or trade usage as being required to produce the intended result will be furnished and performed whether or not specifically called for. When words or phrases which have a well-known technical or construction industry or trade meaning are used to describe Work, materials or equipment, such words or phrases shall be interpreted in accordance with that meaning.
- 1.3. Plans and Specifications – All Work that may be called for in the Specifications and not shown on the Plans, or shown on the Plans and not called for in the Specifications, shall be executed and furnished by the Contractor as if described in both these ways; and should any work or materials be required which are not detailed in the Specifications or Plans, either directly or indirectly, but which are nevertheless necessary for the proper carrying out of the intent thereof, the Contractor is to understand the same to be implied and required, and shall perform all such work and furnish any such materials as fully as if they were particularly delineated and described. The Contractor shall keep one copy of all Plans and Specifications on the project at all times.
- 1.4. This procurement is being conducted on behalf of other public bodies, in accordance with § 2.2-4304 (A) of the Code of Virginia. If authorized by the bidder, the resultant contract may be extended to any public body in the Commonwealth of Virginia in accordance with contract terms.

2. INSURANCE

- 2.1. The Contractor shall not commence Work under this contract until he has obtained all the insurance required under this paragraph and such insurance has been approved by the City, nor shall the Contractor allow any Subcontractor to commence Work on his subcontract until the insurance required of the Subcontractor has been so obtained and approved.
 - 2.1.1. The Contractor shall procure and maintain during the life of this contract Worker's Compensation Insurance as required by applicable Virginia law for all of his employees to be engaged in Work at the site of the Project under this contract and, in case of any such Work sublet, the Contractor shall require the Subcontractor similarly to provide Worker's Compensation Insurance for all of the latter's employees to be engaged in such Work unless such employees are covered by the protection afforded by the Contractor's Worker's Compensation Insurance. In case any class of employees engaged in hazardous work on the project under this contract is not protected under the Worker's Compensation Statute, the Contractor shall provide and shall cause each Subcontractor to provide adequate employer's Liability Insurance for the protection of such of his employees as are not otherwise protected.

- 2.1.2. Contractor's General Liability and Vehicle Liability Insurance: The Contractor shall procure and shall maintain during the life of the contract Contractor's General Liability Insurance and Vehicle Liability Insurance in the amounts specified in Section 2.3 below.
- 2.1.3. Subcontractor's General Liability and Vehicle Liability Insurance: The Contractor shall either:
 - 2.1.3.1. require each of his Subcontractors to procure and to maintain during the life of his subcontract, Subcontractor's General Liability and Vehicle Liability Insurance of the type and in the amounts specified in subparagraph (2.1.2) hereof; or
 - 2.1.3.2. insure the activities in his policy, specified in subparagraph (2.1.2) hereof.
- 2.1.4. Fire, Extended Coverage, Vandalism, and Malicious Mischief (Completed Value Builder's Risk) Insurance: The Contractor shall purchase "All Risk" type Builder's Risk Insurance. The policy shall cover not less than the losses due to fire, explosion, hail, lightning, vandalism, malicious mischief, wind, water, flood, collapse, riot, aircraft, and smoke during the contract time, and until the work is accepted by the Owner. The Builder's Risk Insurance shall be for the benefit of the Owner, the Contractor, and the Subcontractors, as their interest may appear.
- 2.1.5. Scope of Insurance and Special Hazards: The insurance required under subparagraphs (2.1.2) and (2.1.3) hereof shall provide adequate protection for the Contractor and his Subcontractors, respectively, against damage claims which may arise from operations under this contract, whether such operations be by the insured or by anyone directly or indirectly employed by him and, also against any of the special hazards which may be encountered in the performance of this contract.
- 2.1.6. Proof of Carriage of Insurance: The Contractor shall furnish the City with certificates showing the type, amount, class of operations covered, effective dates, and date of expiration of policies.
- 2.2. Special Hazards – The Contractor's and his Subcontractor's Public Liability and Property Damage Insurance shall provide adequate protection against the following special hazards:
 - 2.2.1. Owner's Protective Liability Insurance
 - 2.2.2. Contractor's Completed Operations

All insurance coverages shall be written by companies licensed to do business in Virginia and shall be administered by a Virginia registered agent and shall list the City as an additional insured.
- 2.3. General Liability, Vehicle Liability, and Worker's Compensation Insurance: The Contractor's General Liability Insurance, Vehicle Liability Insurance, and Worker's Compensation Insurance shall not be less than \$2,000,000, \$500,000, and \$500,000 respectively. BUILDERS RISK shall not be less than the contract amount.
 - 2.3.1. The Contractor shall either:
 - 2.3.1.1. Require each of his Subcontractors to procure and to maintain during the life of his subcontract, Subcontractor's General Liability and Vehicle Liability

Insurance of the type and in the same amounts as specified in the preceding paragraph; or

2.3.1.2. Insure the activities of his Subcontractors in his own policy.

3. AVAILABILITY OF LANDS

- 3.1. City shall furnish, as indicated in the Contract Documents, the lands upon which the Work is to be performed, rights-of-way and easements for access thereto, and such other lands which are designated for the use of Contractor. Upon reasonable written request, City shall furnish Contractor with a correct statement of record legal title and legal description of the lands upon which the Work is to be performed and City's interest therein as necessary for giving notice of or filing a mechanic's lien against such lands in accordance with applicable Laws and Regulations. City shall identify any encumbrances or restrictions not of general application but specifically related to use of lands so furnished with which Contractor will have to comply in performing the Work. Easements for permanent structures or permanent changes in existing facilities will be obtained and paid for by City, unless otherwise provided in the Contract Documents. Contractor shall provide for all additional lands and access thereto that may be required for temporary construction facilities or storage of materials and equipment.
- 3.2. Construction in Public Rights-of-Way - The Contractor shall perform all his operations in a manner that will cause the minimal possible disruption to the normal vehicular and pedestrian traffic. The Contractor shall not block streets or highway to traffic without the prior consent of the City. Flagmen, lights, barricades, and construction signs shall be provided as directed by City. All barricades, signs, cones, etc. must conform to the guidelines established by the Manual of Uniform Traffic Control Devices (M.U.T.C.D.) and the Virginia Work Area Protection Manual. All flagmen must be Virginia Department of Transportation certified. Pavement, shoulders, ditches, drainage structures and all other facilities disturbed during the construction shall be restored to their original condition, at the Contractor's expense except for work specifically itemized in the proposal. The Performance Bond shall cover all work on the City's rights-of-way and easements and the Contractor shall be responsible for the repair and maintenance of all areas disturbed within said rights-of-way and easements. No open ditches shall be permitted overnight in public rights-of-way.
- 3.3. Construction on Private and Public Property - The area of the construction shall be left in the same condition as it was found. All private and public utilities pipes, wires, lines, fences, walls, walks, pavements, curb and gutter, graveled areas, driveways, drainage structures, trees, shrubs, mailboxes, guy wires, septic systems, etc., encountered during the work whether shown on the Plans or not, shall be protected from damage by the Contractor. Should any facilities be damaged, the Contractor shall repair, replace, or pay damages for same. The surface of the construction area shall be graded, stoned, paved, seeded, etc.; to fit original conditions encountered. Payment for this work shall be included in the Proposal price of the item under construction.

4. EXISTING UTILITIES

- 4.1. The information and data shown or indicated in the Contract Documents with respect to existing Underground Facilities at or contiguous to the site is based on information and data furnished to the City or by the owners of such Underground Facilities or by others, unless otherwise expressly provided in the Special and Supplemental Conditions.

- 4.2. City shall not be responsible for the accuracy or completeness of any such information or data; and
- 4.3. The cost of all of the following will be included in the Contract Price and Contractor shall have full responsibility for:
 - 4.3.1. reviewing and checking all such information and data;
 - 4.3.2. locating all Underground Utilities shown or indicated in the Contract Documents
 - 4.3.3. coordination of the Work with the owners of such Underground Facilities during construction;
 - 4.3.4. the safety and protection of all Underground Facilities and repairing any damage thereto resulting from the Work.
- 4.4. Existing Utility Lines - The Contractor shall not disturb or damage any existing utility lines found above or below ground whether shown on the Plans or not. If during the course of the work any disturbance, or breakage should occur, the Contractor shall replace, at his own expense, the affected utility lines to the satisfaction of the City and the proper utility company. The Contractor shall bear full responsibility for any damage to life and/or property incurred as a result of such disturbance or damage to existing utility lines. Special attention should be paid to the Code of Virginia, Sections 59.1-406 - 59.1-414 - "Overhead High Voltage Line Safety Act".

5. SCHEDULE

- 5.1. Schedule of Construction - Commencement of construction shall begin by the date determined by the City. Prior to initiation of construction, the Contractor shall have submitted a detailed work schedule to the City and have received approval of same. The Contractor must proceed according to the approved schedule unless the changes are approved by the City.
- 5.2. Contractor shall submit to City for acceptance proposed adjustments in the progress schedule that will not change the Contract Times. Such adjustments will conform generally to the progress schedule.

6. SHOP DRAWING, MATERIAL DATA SHEETS

- 6.1. Contractor shall submit Shop Drawings to Engineer for review and approval. All submittals will be identified as City may require and in the number of copies specified. The data shown on the Shop Drawings will be complete with respect to quantities, dimensions, specified performance and design criteria, materials and similar data to show City the materials and equipment Contractor proposes to provide and to enable City to review the information.
- 6.2. Contractor shall also submit material Data Sheets to City for review and approval. Each submittal will be identified clearly as to material, Supplier, pertinent data such as catalog numbers and the use for which intended and otherwise as City may require to enable City to review the submittal.
- 6.3. Before submitting each Shop Drawing or Material Data Sheet, Contractor shall have determined and verified:
 - 6.3.1. All field measurements, quantities, dimensions, specified performance criteria, installation requirements, materials, catalog numbers and similar information with respect thereto;

- 6.3.2. All materials with respect to intended use, fabrication, shipping, handling, storage, assembly and installation pertaining to the performance of the Work; and
- 6.3.3. All information relative to Contractor's sole responsibilities in respect of means, methods, techniques, sequences and procedures of construction and safety precautions and programs incident thereto.
- 6.4. Whenever an item of material or equipment is specified or described in the Contract Documents by using the name of a proprietary item or the name of a particular Supplier, the specification or description is intended to establish the type, function and quality required. Unless the specification or description contains or is followed by words reading that no like, equivalent or "or-equal" item or no substitution is permitted, other items of material or equipment or material or equipment of other Suppliers may be accepted by City under the following circumstances:
 - 6.4.1. **"Or-Equal"**: If in Engineer's sole discretion an item of material or equipment proposed by Contractor is functionally equal to that named and sufficiently similar so that no change in related Work will be required, it may be considered by Engineer as an "or-equal" item, in which case review and approval of the proposed item may, in Engineer's sole discretion, be accomplished without compliance with some or all of the requirements for acceptance of proposed substitute items.
 - 6.4.2. **Substitute Items**: If in Engineer's sole discretion an item of material or equipment proposed by Contractor does not qualify as an "or-equal" it will be considered a proposed substitute item. Contractor shall submit sufficient information as provided below to allow Engineer to determine that the item of material or equipment proposed is essentially equivalent to that named and an acceptable substitute therefor. If Contractor wishes to furnish or use a substitute item of material or equipment, Contractor shall first make written application to Engineer for acceptance thereof, certifying that the proposed substitute will perform adequately the functions and achieve the results called for by the general design, be similar in substance to that specified and be suited to the same use as that specified. The application will state the extent, if any, to which the evaluation and acceptance of the proposed substitute will prejudice Contractor's achievement of Substantial Completion on time, whether or not acceptance of the substitute for use in the Work will require a change in any of the Contract Documents to adapt the design to the proposed substitute and whether or not incorporation or use of the substitute in connection with the Work is subject to payment of any license fee or royalty. All variations of the proposed substitute from that specified will be identified in the application and available maintenance, repair and replacement service will be indicated. The application will also contain an itemized estimate of all costs or credits that will result directly or indirectly from acceptance of such substitute, including costs of redesign and claims of other Contractors affected by the resulting change, all of which will be considered by Engineer in evaluating the proposed substitute. Engineer may require Contractor to furnish additional data about the proposed substitute.

7. CONTRACTOR'S RESPONSIBILITIES

- 7.1. It is understood and agreed that the Contractor has, by careful examination, satisfied himself as to the nature and locations of the work, the conformation of the ground to be encountered, the character of equipment and facilities needed preliminary to and during the prosecution of the work, the general and local conditions and all other matters which in any way effect the work

under this Contract. No verbal agreement or conversation with any officer, agent or employee of the City either before or after the execution of this Contract, shall affect or modify any of the terms or obligations herein contained.

- 7.2. The Contractor shall keep on the work during its progress, a competent superintendent, satisfactory to the City and any directions given to such superintendent shall be as binding as if given to the Contractor. If the Contractor, in the course of the work, finds any discrepancy between the drawings and the physical conditions of the locality or any errors or omissions in drawings or in the layout as given by Points and Instructions, it shall be his duty to immediately inform the City in writing, and the City shall promptly verify the same. Any work done after such discovery, until authorized, will be done at the Contractor's risk.

- 7.2.1. The contractor shall provide a superintendent and work force that is cooperative and friendly with the business community and general public. Abusive language and actions are prohibited.

- 7.3. Contractor shall supervise, inspect and direct the Work competently and efficiently, devoting such attention thereto and applying such skills and expertise as may be necessary to perform the Work in accordance with the Contract Documents. Contractor shall be solely responsible for the means, methods, techniques, sequences and procedures of construction. Contractor shall be responsible to see that the completed Work complies accurately with the Contract Documents.

- 7.4. Unless otherwise specified in the Contract Documents, Contractor shall furnish and assume full responsibility for all materials, equipment, labor, transportation, construction equipment and machinery, tools, appliances, fuel, power, light, heat, telephone, water, sanitary facilities, temporary facilities and all other facilities and incidentals necessary for the furnishing, performance, testing, start-up and completion of the Work.

- 7.5. All materials and equipment shall be good quality and new, except as otherwise provided in the Contract Documents. All warranties and guarantees specifically called for by the Specifications shall expressly run to the benefit of the City. If required Contractor shall furnish satisfactory evidence (including reports of required tests) as to the kind and quality of materials and equipment. All materials and equipment shall be applied, installed, connected, erected, used, cleaned and conditioned in accordance with instructions of the applicable Supplier, except as otherwise provided in the Contract Documents.

- 7.6. Throughout the course of the construction, the Contractor shall maintain the project free from any conditions, which may result in danger or nuisance to the public, including but not limited to dust and street disrepair.

- 7.6.1. The Contractor shall take steps necessary to provide the safety necessary to protect the general public in the area.

- 7.7. The Contractor shall be responsible for the condition of all excavations made by him. All slides and cave-ins shall be removed without extra compensation, at whatever time and under whatever circumstances they may occur. The neglect, failure, or refusal of the City to order the use of bracing or sheeting, or a better quality, grade, or section, or larger sizes of steel or timber, or to order sheeting, bracing, struts, or shoring to be left in place, or the giving or failing to give orders or directions as to the manner or methods of placing or driving sheeting, bracing, jacks, wales, rangers, etc., shall not in any way or to any extent relieve the Contractor of any responsibility concerning the condition of excavation or any of his obligations under the Contract; nor shall

any delay, whether caused by any action or want of action on the part of the Contractor, or any acts of the City, or his agents, or employees, resulting in the keeping of an excavation open longer than would otherwise have been necessary, relieve the Contractor from the necessity of properly and adequately protecting the excavation from caving or slipping, nor from any of his obligations under the Contract relating to injury of persons or property, nor entitle him to any claim for extra compensation. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO MAINTAIN PROPER AND SUFFICIENT SHEETING, SHORING AND BRACING TO PROTECT ALL PERSONS CONNECTED WITH THE WORK FROM INJURY.

- 7.8. Adequate sanitary conveniences for the use of persons employed on the work, properly secluded from public observation, shall be constructed and maintained by the Contractor in such a manner and at such points as shall be approved by the City. These conveniences shall be maintained at all times without nuisance and their use shall be strictly enforced; upon completion of the work they shall be removed leaving the area clean and free from nuisance.
- 7.9. The Contractor will be required to comply with the City's Erosion and Sediment Control Ordinance. Special care shall be taken to prevent siltation of existing sewer, streets, drainage ditches, and private property.
- 7.10. Contractor shall obtain and pay for all construction permits and licenses. City shall assist Contractor, when necessary, in obtaining such permits and licenses. Contractor shall pay all governmental charges and inspection fees necessary for the prosecution of the Work, which are applicable at the time of opening Bids, or, if there are no Bids, on the Effective Date of the Contract.
- 7.11. The Contractor shall provide all field engineering services necessary for laying out the Project. All such services shall be performed by a Professional Surveyor registered with the State of Virginia. Control points shall be established and maintained during the execution of the Project. All documentation and control points shall be made available to the City throughout the execution of the Project.
- 7.12. The Contractor shall provide at their cost an independent testing service, approved by the Engineer, to perform all testing required by the Contract Documents. Written reports shall be provided to the City.
- 7.13. The Contractor shall provide “as built” plans within 30 days of project completion. Such plans shall be prepared by a Licensed Surveyor and shall show such items as final elevations, grades, structure locations, etc.
- 7.14. Representatives of the City, as well as representatives of Local, State and Federal agencies and parties having an interest in the project shall have access to the work wherever it is in preparation or progress and the Contractor shall provide proper facilities for such access and review.
- 7.15. During the performance of this contract, the Contractor agrees to
 - 7.15.1. provide a drug-free workplace for the Contractor’s employees
 - 7.15.2. post in conspicuous places, available to employees and applicants for employment, a statement notifying employees that the unlawful manufacture, sale, distribution, dispensation, possession, or use of a controlled substance or marijuana is prohibited in

the Contractor's workplace and specifying the actions that will be taken against employees for violations and such prohibition

7.15.3. state in all solicitations or advertisements for employees placed by or on behalf of the Contractor that the Contractor maintains a drug free workplace; and

7.15.4. include the provisions of the foregoing clauses in every subcontract or purchase order of over \$10,000.00, so that such provisions will be binding upon each Subcontractor or vendor.

7.16. Contractor certifies that it does not and will not during the performance of this Contract violate:

7.16.1. The provisions of the Federal Immigration Reform and Control Act of 1986, as amended and §40.1-11.1, Code of Virginia, which prohibits the employment of illegal aliens.

7.16.2. The provisions of Federal and State employment and wage hour laws. The Contractor shall include and enforce the language in the last sentence in every subcontract issued under this Contract and shall require the subcontractor to do the same.

8. SUBCONTRACTS

8.1. Contractor shall not employ any Subcontractor, Supplier or other person or organization whether initially or as a substitute, against whom City may have reasonable objection. Contractor shall not be required to employ any Subcontractor, Supplier or other person or organization to furnish or perform any of the Work against whom Contractor has reasonable objection.

8.2. Contractor shall be fully responsible to City for all acts and omissions of the Subcontractors, Suppliers and other persons and organizations performing or furnishing any of the Work under a direct or indirect contract with Contractor just as Contractor is responsible for Contractor's own acts and omissions. Nothing in the Contract Documents shall create for the benefit of any such Subcontractor, Supplier or other person or organization any contractual relationship between City and any such Subcontractor, Supplier or other person or organization, nor shall it create any obligation on the part of the City to pay or to see the payment of any moneys due any such Subcontractor, Supplier or other person or organization except as may otherwise be required by Laws and Regulations.

8.3. Contractor shall be solely responsible for scheduling and coordinating the Work of Subcontractors, Suppliers and other persons and organizations performing or furnishing any of the Work under a direct or indirect contract with Contractor. Contractor shall require all Subcontractors, Suppliers and such other persons and organizations performing or furnishing any of the Work to communicate with the City through Contractor.

8.4. The Contractor shall, as directed by the Owner, remove from all public and private property, at his own expense, all temporary structures, rubbish and waste materials, resulting from his operations; and shall leave the site in a neat, orderly condition.

9. OWNER'S RESPONSIBILITY

9.1. The Owner through his designated representatives shall have general supervision and direction of the work. He has the authority to stop the work whenever such stoppage may be necessary to ensure the proper execution of the Contract. He shall also have authority to reject all work and materials which do not conform to the Contract, to direct the application of forces to any portion

of the work as in his judgment is required, to order the force increased or diminished and to decide questions which arise in the execution of the work.

- 9.2. Wherever work being done by the City's forces or by other Contractors is contiguous to work covered by this Contract the respective rights of the various interests involved shall be established by the City to secure the completion of the various portions of the work in general harmony.
- 9.3. If the Contractor should neglect to execute the work properly or fail to perform any provision of this Contract, the City after three days' written notice to the Contractor, may without prejudice to any other remedy make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor.
- 9.4. City shall promptly furnish the data required under the Contract Documents and shall make payments to Contractor promptly when they are due.
- 9.5. City shall provide inspection of the Contractors Work.
- 9.6. The City shall have the right at any time, for reasons which appear good to them, to annul this Contract upon giving written notice to the Contractor, in which event the Contractor shall be entitled to the full amount of the estimate for the work done by him under this Contract up to the time of such annulment, including the retained percentage. The Contractor shall be reimbursed by the City for such expenditures that are not otherwise compensated for, and as are required in preparing for and moving to and from the work; the intent being that an equitable settlement shall be made with the Contractor.

10. CHANGES IN WORK

- 10.1. Without invalidating the Contract and without notice to any surety, City may, at any time or from time to time, order additions, deletions or revisions in the work. Any additions, deletions or revisions will be authorized by a Change Order. Upon receipt of any such document, Contractor shall promptly proceed with the Work involved which will be performed under the applicable conditions of the Contract Documents.
- 10.2. Contractor shall not be entitled to an increase in the Contract Price or an extension of the Contract Times with respect to any Work performed that is not required by the Contract Documents as amended, modified and supplemented.
- 10.3. City and Contractor shall execute appropriate Change Orders covering:
 - 10.3.1. Changes in the Work which are ordered by City;
 - 10.3.2. Changes in the Contract Price or Contract Times which are agreed to by the parties; and
 - 10.3.3. Changes in the Contract Price or Contract Times, which embody the substance of any written decision, rendered by the City.

11. CHANGES IN CONTRACT PRICE

- 11.1. The Contract Price constitutes the total compensation (subject to authorized adjustments) payable to Contractor for performing the Work. All duties, responsibilities and obligations assigned to or undertaken by Contractor shall be at Contractor's expense without change in Contract Price.

- 11.2. The Contract Price may only be changed by a Change Order. Any claim for an adjustment in the Contract Price shall be based on written notice delivered by the party making the claim to the other party and to City promptly after the start of the occurrence or event giving rise to the claim and stating the general nature of the claim. Notice of the amount of the claim with supporting data shall be delivered within 20 days after the start of such occurrence or event and shall be accompanied by claimant's written statement that the adjustment claimed covers all known amounts to which the claimant is entitled as a result of said occurrence or event. No claim for an adjustment in the Contract Price will be valid if not submitted in accordance with this paragraph 11.2.
- 11.3. The value of any Work covered by a Change Order or of any claim for an adjustment in the Contract Price will be determined as follows:
 - 11.3.1. Where the Work involved is covered by unit prices contained in the Contract Documents, by application of such unit prices to the quantities of the items involved.
 - 11.3.2. Where the Work involved is not covered by unit prices contained in the Contract Documents, by a mutually agreed lump sum.

12. CHANGES IN CONTRACT TIMES

- 12.1. The Contract Times may only be changed by a Change Order except for inclement weather days as determined by the City. Such inclement weather days shall be maintained by the City and added to the number of days permitted for completion of the Project. Any claim for an adjustment of the Contract Times shall be based on written notice delivered by the party making the claim to the other party and to City promptly after the occurrence of the event giving rise to the claim and stating the general nature of the claim. Notice of the extent of the claim with supporting data shall be delivered within 20 days after such occurrence and shall be accompanied by the claimant's written statement that the adjustment claimed is the entire adjustment to which the claimant has reason to believe it is entitled as a result of the occurrence of said event. All claims for adjustment in the Contract Times shall be determined by City. No claim for an adjustment in the Contract Times will be valid if not submitted in accordance with the requirements of this paragraph 12.1.
- 12.2. Where Contractor is prevented from completing any part of the Work within the Contract Times due to delay beyond the control of Contractor, the Contract Times will be extended in an amount equal to the time lost due to such delay if a claim is made therefor as provided in paragraph 12.1. Delays beyond the control of Contractor shall include, but not be limited to, acts or neglect by City, acts or neglect of utility owners, fires, floods, epidemics, abnormal weather conditions or acts of God. Delays attributable to and within the control of a Subcontractor or Supplier shall be deemed to be delays within control of Contractor.
- 12.3. Where Contractor is prevented from completing any part of the Work within the Contract Times due to delay beyond the control of both City and Contractor, an extension of the Contract Times in an amount equal to the time lost due to such delay shall be Contractor's sole and exclusive remedy for such delay. In no event shall City be liable to Contractor, any Subcontractor, any Supplier, any other person or organization, or to any surety for or employee or agent of any of them, for damages arising out of or resulting from:
 - 12.3.1. delays caused by or within the control of Contractor, or

- 12.3.2. delays beyond the control of both parties including but not limited to fires, floods, epidemics, abnormal weather conditions, acts of God or acts or neglect by utility owners.

13. INDEMNIFICATION

- 13.1. The Contractor agrees to indemnify, defend and hold harmless the City, its members of Council, officers, directors, agent and employees, against any and all claims, liabilities, losses, damages, costs and expenses (including reasonable attorney fees) arising out of, or resulting from any and all injuries to persons or damage to property arising out of services performed hereunder or by reason of the intentional or negligence acts or omissions of the Contractor, its employees, agents or sub-consultants, including any independent contractors.

14. SEPARATE CONTRACTS

- 14.1. The City reserves the right to let other contracts in connection with this work. The Contractor shall afford other Contractors reasonable opportunity for the introduction and storage of their materials and the execution of their work, and shall properly connect and coordinate his work with theirs.

15. PAYMENT

- 15.1. 5% of the dollar amount of the estimate of work completed shall be withheld until the final acceptance of the project. Payment shall be made based on estimates of work completed in the preceding month submitted on, or before the 5th day of the month for the duration of the contract. Application for partial payments shall be submitted on Standard City form.
- 15.2. Material stored on site shall be paid for based on supplier invoice only.
- 15.3. Failure by the City to make payments at the time provided by this Contract shall give the Contractor the right to suspend work until payment is made, or, at his option, after thirty days written notice, should the City continue to default; to terminate this Contract and recover the price of all work done and materials provided and all damages sustained; and such failure to make payment at the time provided shall be a bar to any claim by the City against the Contractor for delay in completion of the work, due to such suspension or failure to pay.
- 15.4. Payments to Subcontractors: The Contractor shall take one of two actions within seven days after receipt of payment by the City:
 - 15.4.1. Pay the Subcontractor for the proportionate share of the total payment received from the City attributable to the work performed by the Subcontractor under that contract; or
 - 15.4.2. Notify the City and Subcontractor, in writing, of his intention to withhold all or part of the Subcontractor's payment with the reason for nonpayment.

The Contractor shall pay interest to any Subcontractor on all amounts owed by the Contractor that remain unpaid after seven days following receipt by the Contractor of payment by the City for work performed by the Subcontractor. Interest shall accrue at the rate of 1 percent per month.

- 15.5. Upon the completion of the work and its final acceptance by the City, the Contractor shall submit his final estimate over his signature, covering work provided for in this Contract, completed and accepted by the City under the terms and condition hereof, whereupon the balance found to be due the Contractor, including the retained percentage, shall be paid to the Contractor within 30 days of receipt of the final estimate by the City, provided that, before the payment of said final estimate the Contractor shall submit evidence satisfactory to the City that all payrolls, material

bills and outstanding indebtedness in connection with the work have been paid. The payment of the final estimate due under this Contract and any and all alterations of same, shall release the City and the officers and agents thereof, from any and all claims or liabilities on account of the work performed and materials furnished under this Contract or any alterations thereof.

- 15.6. The General Contractor shall have the option to use an escrow account procedure for utilization of the City's retainage funds, when contracting directly with the City for contracts involving \$200,000 or more of public funds, where portions of the contract price are to be retained, where such contracts are for: construction of highways, roads, streets, bridges, parking lots, demolition, clearing, grading, excavating, paving, pile driving, drainage structures and the installation of water, gas, sewer lines and pumping stations. In the event a Contractor elects to utilize the escrow account procedure, then any sub such public project which provides for progress payments shall be subject to the same escrow account procedures.

- 15.6.1. The Contractor shall indicate its election to use the escrow account procedure, by completing the escrow agreement form and contract included in the Bid Documents for this Project. The form and contract shall be submitted to the City within fifteen (15) calendar days after the Contractor is notified of the award of the contract. If the escrow agreement form and contract are not submitted within the 15 day period, then the Contractor shall forfeit its right to the use of the escrow account procedure.

- 15.6.2. In order to have retained funds paid to an escrow agent, the Contractor, the escrow agent, and the surety shall execute an escrow agreement form. The Contractor's escrow account shall be a trust company, bank or savings institution with its principal office located in the Commonwealth of Virginia.

- 15.6.3. This escrow account procedure shall not apply to public contracts for construction of railroads, public transit systems, runways, dams, foundations, installation or maintenance of power systems for the generation and primary and secondary distribution of electric current ahead of the customer's meter, the installation or maintenance of telephone, telegraph or signal systems for public utilities or the construction or maintenance of solid waste or recycling facilities and treatment plants.

16. DISCRIMINATION

- 16.1. During the performance of this contract, the Contractor agrees as follows:

- 16.1.1. The Contractor will not discriminate against any employee or applicant for employment because of race, religion, color, sex or national origin, age, disability, or other basis prohibited by state law relating to discrimination in employment, except where there is a bona fide occupational qualification reasonably necessary to the normal operation of the Contractor. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices setting forth the provisions of this nondiscrimination clause.

- 16.1.2. The Contractor, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, will state that such Contractor is an equal opportunity employer.

- 16.1.3. Notices, advertisements and solicitations placed in accordance with federal law, rule or regulation shall be deemed sufficient for the purpose of meeting the requirements of this section.

The Contractor will include the provisions of the foregoing paragraphs 16.1.1, 16.1.2, and 16.1.3 in every subcontract or purchase order of over \$10,000, so that the provisions will be binding upon each Subcontractor or vender.

17. CLAIM PROCESS

- 17.1. The OWNER and CONTRACTOR each hereby waive all right to trial by jury in any matter arising out of or in any way connected with this CONTRACT or their relationship, whether contractual or extra-contractual. They agree that prior to the assertion of any claim against the other, they will endeavor to resolve the claim through discussion, including the optional use of non-binding mediation. Absent agreed resolution, the process to assert a claim against the City is to present it in writing to the Appropriate City Department Director; and absent acceptance of the decision of the Director of Public Works, then appeal in turn to the City Manager or designee and ultimately to Council, with each such appeal to be submitted in writing within 10 calendar days of prior decision, identifying in writing on what specific basis, with citation to controlling and supporting documentation and legal authority, the appeal is sought and challenge made to the prior decision and the resolution or remedy which would be acceptable. With any claim that reaches City Council, the City Council shall decide the claim within 60 days of when it was submitted to the City Manager or designee.

END OF GENERAL CONDITIONS

ESCROW ACCOUNT ELECTION FORM

ELECTION OF ESCROW ACCOUNT PROCEDURE FOR RETAINAGE

If determined to be the successful low bidder(s), the below signed elects to use the Escrow Account Procedure for retainage.

Write “Yes” or “No” on above line

If the successful bidder elects ("Yes") to use the Escrow Account Procedure for Retainage, the following “Escrow Agreement” form provided below shall be executed and submitted to the City within fifteen (15) calendar days after notification. If the “Escrow Agreement” form is not submitted within the fifteen (15) day period, the Contractor shall forfeit his rights to the use of the Escrow Account Procedure.

Company:

Authorized Signature:

SIGNATURE PAGE TO FOLLOW

ESCROW AGREEMENT

CITY OF STAUNTON, VIRGINIA

THIS AGREEMENT ("Agreement"), made and entered into this _____ day of _____, 2020 by, between and among the City of Staunton, Virginia ("City" or Owner"),

_____, ("Contractor"),

_____, (Name of Escrow Agent)

_____, (Address of Escrow Agent)

a trust company, bank, or savings and loan institution (hereinafter referred to collectively as "Escrow Agent") with its principal office located in the Commonwealth of Virginia ("Commonwealth") and _____ ("Surety") provides:

I.

The City and the Contractor have entered into a contract dated _____ with respect to City of Staunton ITB No. _____, for _____

_____, ("Contract"). This Agreement is pursuant to, but in no way amends or modifies, the Contract. Payments made hereunder or the release of funds from escrow shall not be deemed approval or acceptance of performance by the Contractor. Payments should be made to _____ and mailed to _____ (Name and Address of Escrow Agent).

II.

In order to assure full and satisfactory performance by the Contractor of its obligations under the Contract, the City is required thereby to retain certain amounts otherwise due the Contractor. The Contractor has, with the approval of the City, elected to have these retained amounts held in escrow by the Escrow Agent. This agreement sets forth the terms of the escrow. The Escrow Agent shall not be deemed a party to, bound by, or required to inquire into the terms of the Contract or any other instrument or agreement between the City and the Contractor.

III.

The City shall from time to time pursuant to the Contract pay to the Escrow Agent amounts retained by it under the Contract. Except as to amounts actually withdrawn from escrow by the City, the Contractor shall look solely to the Escrow Agent for the payment of funds retained under the Contract and paid by the City to the Escrow Agent.

The risk of loss by diminution of the principal of any funds invested under the terms of the Contract shall be solely upon the Contractor.

Funds and securities held by the Escrow Agent pursuant to this Escrow Agreement shall not be subject to levy, garnishment, attachment, lien, or other process whatsoever. Contractor agrees not to assign, pledge, discount, sell or otherwise transfer or dispose of his interest in the escrow account or any part thereof, except to the Surety.

IV.

Upon receipt of checks drawn by the City and made payable to the Escrow Agent under this agreement, the Escrow Agent shall promptly notify the Contractor, negotiate the same and deposit or invest and reinvest the proceeds in approved securities in accordance with the written instructions of the Contractor. In no event shall the Escrow Agent invest the escrowed funds in any security not approved, as set forth in Section V. below.

V.

The following securities, and none other, are approved securities for all purposes of this Agreement:

- (1) United States Treasury Bonds, United States Treasury Notes, United States Treasury Certificates of Indebtedness or United States Treasury Bills,
- (2) Bonds, notes and other evidences of indebtedness unconditionally guaranteed as to the payment of principal and interest by the United States,
- (3) Bonds or notes of the Commonwealth of Virginia,
- (4) Bonds of any political subdivision of the Commonwealth of Virginia, if such bonds carried, at the time of purchase by the Escrow Agent or deposit by the Contractor, a Standard and Poor's or Moody's Investor Service rating of at least "A", and
- (5) Certificates of deposit issued by commercial Banks located within the Commonwealth of Virginia, including, but not limited to, those insured by the Escrow Agent and its affiliates.
- (6) Any bonds, notes, or other evidences of indebtedness listed in Sections (1) through (3) may be purchased pursuant to a repurchase agreement with a bank, within or without the Commonwealth of Virginia having a combined capital, surplus and undivided profit of not less than \$25,000,000, provided the obligation of the bank to repurchase is within the time limitations established for investments as set forth herein. The repurchase agreement shall be considered a purchase of such securities even if title, and/or possession of such securities is not transferred to the Escrow Agent, so long as the repurchase obligation of the bank is collateralized by the securities themselves, and the securities have on the date of the repurchase agreement a fair market value equal to at least 100% of the amount of the repurchase obligation of the bank, and the securities are held by a third party, and segregated from other securities owned by the bank.
- (7) No security is approved hereunder which matures more than five (5) years after the date of its purchase by the Escrow Agent or deposit by the Contractor.

VI.

The Contractor may from time to time withdraw the whole or any portion of the escrowed funds by depositing with the Escrow Agent approved securities as set forth in Section V. above in an amount equal to, or in excess of, the amount so withdrawn. Any securities so deposited or withdrawn shall be valued at such time of deposit or withdrawal at the lower of par or market value, the latter as determined by the Escrow Agent. Any securities so deposited shall thereupon become a part of the escrowed fund.

Upon receipt of a direction signed by the City of Staunton Director of Finance or designee, the Escrow Agent shall pay the principal of the fund, or any specified amount thereof, to the City or the Contractor as the City may direct. If payment is to be made to the Staunton City Treasurer, it shall be made in cash or cash equivalent. However, if payment has been authorized to be made to the Contractor, the Contractor

may specify to the Escrow Agent if payment is to be made in cash or in kind. Any such payment and delivery required hereunder shall be made as soon as is practicable after receipt of the direction.

VII.

For its services hereunder, the Escrow Agent shall be entitled to a reasonable fee in accordance with its published schedule of fees or as may be agreed upon by the Escrow Agent and the Contractor. Such fee and any other costs of administration of this Agreement shall be paid from the income earned upon the escrowed fund and, if such income is not sufficient to pay the same, by the Contractor.

VIII.

The net income earned and received upon the principal of the escrowed fund shall be paid over to the Contractor in quarterly or more frequent installments. Until so paid or applied to pay the Escrow Agent's fee or any other costs of administration, such income shall be deemed a part of the principal of the fund.

IX.

The Surety undertakes no obligation hereby but joins in this Agreement for the sole purpose of acknowledging that its obligations as surety for the Contractor's performance of the contract are not affected hereby.

X.

This Escrow Agreement shall be governed by, and construed in accordance with, the laws of the Commonwealth of Virginia, without application of Virginia's conflict of law provisions. Venue and any actions for any litigation, suits, and claims arising from or connected with this Escrow Agreement and/or Contract referred to herein shall only be proper in the City of Staunton Circuit Court, or in the Staunton General District Court if the amount in controversy is within the jurisdictional limit of such court, and all parties to this Escrow Agreement and/or such Contract voluntarily submit themselves to the jurisdiction and venue of such courts, regardless of the actual location of such parties.

IN WITNESS WHEREOF, the parties hereto have signed this Escrow Agreement by their authorized representatives.

Attest: (if corporation)

Witness: (if individual)

Typed Name of Contractor

Attest:

Bank Officer

Witness:

President/Vice-President

Partner or Owner (Seal)

Typed Name of Escrow Agent

Vice President

Typed Name of Surety Company

By:

Attorney-In-Fact

Attest:

City of Staunton, Virginia

City Clerk

City Manager

Approved as to form:

City Attorney

Approved as to execution:

City Attorney

PROCUREMENT GUIDELINES

1. SUBMISSION AND RECEIPT OF BIDS:

- 1.1. Bids, to receive consideration, must be received prior to the specified time and date of opening as designated in the invitation. E-mail and facsimile submittals are not acceptable.
- 1.2. Unless otherwise specified, bidders must use the bid form furnished by the City. Failure to do so may cause bid to be rejected. Removal of any part of the bid form may invalidate the bid.

2. BID SPECIFICATIONS

- 2.1. Bidders must indicate any variances from our specification and/or conditions, NO MATTER HOW SLIGHT. If variations are not stated in the bid, it will be assumed that the product or service fully complies with our specifications. The Purchasing Department is not responsible for locating or securing any information which is not included in the bid. Accordingly, to insure that sufficient information is available, the bidder must furnish as part of his bid all descriptive material, (i.e., Catalog Cuts, illustrations, drawings, specifications, or other information) necessary for the Purchasing Department to determine whether the goods or services offered meet the salient characteristic requirements of the bid.

3. BRAND NAMES

- 3.1. Unless otherwise provided in the invitation for bid, the name of a certain brand, make, or manufacturer does not restrict bidders to the specific brand, make, or manufacture mentioned; it conveys the general style, type, character, and quality of the equipment desired. The City shall determine in its sole discretion equipment bid to be equal of that specified, considering quality, workmanship, economy of operation, and suitability for the purpose intended, shall be accepted.

4. DELIVERY POINT:

- 4.1. All items shall be delivered F.O.B. destination, and delivery costs and charges included in the bid price. Failure to do so may be cause for rejection of bid. The bidder shall assume all liability and responsibility for the delivery of merchandise in good condition to the specified delivery location(s).

5. CASH DISCOUNTS:

- 5.1. Cash discounts will be considered in determining the award.

6. LATEST MODEL/QUALITY

- 6.1. Bidder shall bid on the latest model, design, etc. of this type of equipment by the manufacturer of which he represents. Equipment shall be new and unused.

7. NOTICE OF AWARD

- 7.1. Notice of award will be posted at <http://www.staunton.va.us/solicitation-results>

8. CHARGES AND PAYMENTS

- 8.1. To Prime Contractor:

- 8.1.1. Invoices for items ordered, delivered and accepted shall be submitted by the contractor directly to the payment address shown on the purchase order/contract. All invoices shall show the purchase order number.

- 8.1.2. Any payment terms requiring payment in less than 30 days will be regarded as requiring payment 30 days after satisfactory invoice or delivery, whichever occurs last. This shall not affect offers of discounts for payment in less than 30 days, however.
- 8.1.3. All goods or services provided under the contract, which are to be paid for with public funds, shall be billed by the contractor at the contract price, regardless of which public agency is being billed.
- 8.1.4. The following shall be deemed to be the date of payment: the date of postmark in all cases where payment is made by mail, or the date of offset when offset proceedings have been instituted as authorized under the Virginia Debt Collection Act.
- 8.1.5. Unreasonable Charges. Under certain emergency procurements and for most time and material purchases, final job costs cannot be accurately determined at the time orders are placed. In such cases, contractors should be put on notice that final payment in full is contingent on a determination of reasonableness with respect to all invoiced charges. Charges which appear to be unreasonable will be researched and challenged, and that portion of the invoice held in abeyance until a settlement can be reached. Upon determining that invoiced charges are not reasonable, the City of Staunton shall promptly notify the contractor, in writing, as to those charges which it considers unreasonable and the basis for the determination. A contractor may not institute legal action unless a settlement cannot be reached within thirty (30) days of notification. The provisions of this section do not relieve City of Staunton of its prompt payment obligations with respect to those charges which are not in dispute (Code of Virginia, § 2.2-4363).

8.2. Payment to Subcontractors:

- 8.2.1. An offeror awarded a contract under this solicitation is hereby obligated:
 - 8.2.1.1. To pay the subcontractor(s) within thirty (30) days of the offeror's receipt of payment from the City of Staunton for the proportionate share of the payment received for work performed by the subcontractor(s) under the contract; or
 - 8.2.1.2. To notify the agency and the subcontractor(s), in writing, of the offeror's intention to withhold payment and the reason.
- 8.2.2. The offeror is obligated to pay the subcontractor(s) interest at the rate of one percent per month (unless otherwise provided under the terms of the contract) on all amounts owed by the offeror that remain unpaid thirty (30) days following receipt of payment from the City of Staunton, except for amounts withheld as stated in (2) above. The date of mailing of any payment by U.S. Mail is deemed to be payment to the addressee. These provisions apply to each sub-tier contractor performing under the primary contract. An offeror's obligation to pay an interest charge to a subcontractor may not be construed to be an obligation of the City of Staunton.

9. TESTING AND INSPECTION

- 9.1. The City of Staunton reserves the right to conduct any test/inspection it may deem advisable to assure goods and services conform to the specifications.

10. ASSIGNMENT OF CONTRACT

- 10.1. A contract shall not be assignable by the offeror in whole or in part without the written consent of the City of Staunton.

11. DEFAULT

- 11.1. In case of failure to deliver goods or services in accordance with the contract terms and conditions, the City of Staunton, after due oral or written notice, may procure them from other sources and hold the offeror responsible for any resulting additional purchase and administrative costs. This remedy shall be in addition to any other remedies which the City of Staunton may have.

12. TAXES

- 12.1. Sales to the City of Staunton are exempt from State sales tax. State sales and use tax certificates of exemption, Form ST-12, will be issued upon request, as the City of Staunton determines appropriate. Any deliveries under this contract shall be free of Federal excise and transportation taxes.

13. INDEMNIFICATION

- 13.1. The Offeror agrees to indemnify, defend, and hold harmless the City of Staunton and its Council members, officers, directors, agents and employees against any and all claims, liabilities, losses, damages, costs and expenses (including reasonable attorney fees) arising out of, or resulting from any and all injuries to persons or damage to property or intellectual infringement claim arising out of services performed hereunder or by reason of the intentional or negligent acts or omissions of the Offeror, its employees, agents or sub-contractors, including any independent contractors. The provisions of this section of shall survive the completion, terminations or expiration of the contract.

14. LIABILITY AND LITIGATION

- 14.1. The City shall not indemnify or hold harmless any contractor or other third party. The City does not waive any right or release any party from liability, whether on its own behalf or on behalf of any boards, employees or agents. The City does not waive the right to trial by jury for any cause of action arising from the Contract and shall not submit any Contract claim to binding arbitration or mediation. The City shall not be liable to contractor for any special, punitive or exemplary damages arising from the performance of the contract, including, but not limited to, incidental damages, and lost profit and lost wages, even if such special damages are reasonably foreseeable. Any provision(s) in the Contract contrary to these statements is/are hereby deleted and rendered void.

15. COPYRIGHTS

- 15.1. The Offeror hired pursuant to this contract is prohibited from copyrighting any papers, interim reports, forms, or other materials resulting from performance under this agreement, without the written permission of the Purchasing Agency. Data and their analysis, forms, and images gathered or developed during fulfillment of this contract may be used by the Offeror in subsequent copyrighted publications, provided the copyrights do not in any way restrict or limit the Purchasing Agency's ownership, use, or distribution of said information, forms, or images.

16. AWARDING THE CONTRACT

- 16.1. The award of a contract shall be determined in the sole discretion of the City based upon evaluation of all information as the City may request. The City reserves the right to waive any informality in bids submitted in response to this Invitation to Bid when such waiver is in the best interest of the City.

- 16.2. The City of Staunton shall endeavor to award the contract within thirty (30) days from receipt of bids. Notice of award will be posted on the City Web Site at <http://www.staunton.va.us/solicitation-results>

17. PUBLIC INSPECTION OF PROCUREMENT RECORDS

- 17.1. Bids submitted shall be subject to public inspection only in accordance with Section 2.2-4342 of the Code of Virginia, which reads, in essence, as follows:
- 17.2. Public inspection of certain records:
 - 17.2.1. Except as provided in this section, all proceedings, records, contracts, and other public records relating to procurement transactions shall be open to the inspection of any citizen, or any interested person, firm or corporation, in accordance with the Virginia Freedom of Information Act.
 - 17.2.2. Cost estimates relating to a proposed procurement transaction prepared by or for a public body shall not be open to public inspection.
 - 17.2.3. Any competitive negotiation offeror, upon request, shall be afforded the opportunity to inspect bid records within a reasonable time after the evaluation and negotiations of bids are completed but prior to award, except in the event that the City decides not to accept any of the bids and to reopen the contract. Otherwise, bid records shall be open to public inspection only after award of the contract.
 - 17.2.4. Any inspection of procurement transaction records under this section shall be subject to reasonable restrictions to ensure the security and integrity of the records.
 - 17.2.5. Trade secrets or proprietary information submitted by a bidder, offeror or contractor in connection with a procurement transaction shall not be subject to the Virginia Freedom of Information Act; however, the bidder, offeror or contractor shall
 - 17.2.5.1. invoke the protections of this section prior to or upon submission of the data or other materials,
 - 17.2.5.2. identify the data or other materials to be protected, and
 - 17.2.5.3. state the reasons why protection is necessary.
 - 17.2.5.4. Bidder may not invoke this protection on the entire bid – only on those sections or data which are considered trade secrets or proprietary.

18. ETHICS IN PUBLIC CONTRACTING

- 18.1. By submitting their bid, all offerors certify that their bid is made without collusion or fraud and that they have not offered or received any kickbacks or inducements from any other offeror, supplier, manufacturer or sub-contractor in connection with their bid, and that they have not conferred on any public employee having official responsibility for this procurement transaction any payment, loan, subscription, advance, deposit of money, services or anything of more than nominal value, present or promised unless consideration of substantially equal or greater value was exchanged.

19. FORUM SELECTION

- 19.1. This solicitation and any resulting contract shall be governed in all respects by the laws of the Commonwealth of Virginia, without reference to conflict of laws principles or rules of construction. Any action, proceeding, or claim in any way related to this agreement or the

relationship between the parties shall be filed and maintained solely in the General District Court or the Circuit Court of the City of Staunton, Virginia.

20. PROMPT PAYMENT ACT

- 20.1. Any contract awarded as a result of this Invitation to Bid shall incorporate the terms and conditions of Article 4 of the Virginia Public Procurement Act with respect to Prompt Payment.

21. REJECTION OF BIDS

- 21.1. The City reserves the right, at any time prior to award of the contract, to reject any and all bids, or any part thereof, to make no award, and/or to issue a new Invitation to Bid, or make modifications, corrections of additions to the information contained herein.
- 21.2. Offerors are cautioned this is an Invitation to Bid, NOT a request to contract.

22. COSTS FOR BID PREPARATION

- 22.1. Any costs incurred by offerors in preparing or submitting bids are the offeror's sole responsibility; the City will not reimburse any offeror for any costs incurred as a result of the preparation of this Invitation to Bid.

23. APPROPRIATIONS

- 23.1. The obligations of the City of Staunton are subject to and contingent upon annual appropriation by City Council of sufficient funds for the purposes of this contract. In the absence of such annual appropriation, either the City of Staunton or offeror may terminate the contract by giving not less than ten (10) days prior notice to the other, specifying this reason for the termination, and upon effective termination pursuant to this provision, any compensation due shall be equitably adjusted by mutual agreement.

24. ADDITIONAL FEDERAL GRANT PROVISIONS

- 24.1. The following provisions apply to a contract made under a federal grant: Appendix II to Part 200 – Contract Provisions for Non-Federal Entity Contracts Under Federal Awards.

25. STATE CORPORATION COMMISSION IDENTIFICATION NUMBER

- 25.1. Pursuant to Code of Virginia, §2.2-4311.2 subsection B, a bidder or offeror organized or authorized to transact business in the Commonwealth pursuant to Title 13.1 or Title 50 is required to include in its bid or proposal the identification number issued to it by the State Corporation Commission (SCC).
- 25.2. Any bidder or offeror that is not required to be authorized to transact business in the Commonwealth as a foreign business entity under Title 13.1 or Title 50 or as otherwise required by law is required to include in its bid or proposal a statement describing why the bidder or offeror is not required to be so authorized. Link to the Virginia State Corporation Commission site: <http://www.scc.virginia.gov/>.

26. ANTITRUST

- 26.1. By entering into a contract, the contractor conveys, sells, assigns, and transfers to the City all rights, title and interest in and to all causes of action it may now have or hereafter acquire under the antitrust laws of the United States and the Commonwealth of Virginia, relating to the particular goods or services purchased or acquired by the City under said contract.

27. QUALIFICATIONS OF (BIDDERS/OFFERORS)

- 27.1. The City may make such reasonable investigations as deemed proper and necessary to determine the ability of the (bidder/offeror) to perform the services/furnish the goods and the (bidder/offeror) shall furnish to the City all such information and data for this purpose as may be requested. The City reserves the right to inspect (bidder's/offeror's) physical facilities prior to award to satisfy questions regarding the (bidder's/offeror's) capabilities.
- 27.2. The City further reserves the right to reject any (bid/ proposal) if the evidence submitted by, or investigations of, such (bidder/offeror) fails to satisfy the City that such (bidder/offeror) is properly qualified to carry out the obligations of the contract and to provide the services and/or furnish the goods contemplated therein.

28. CANCELLATION OF THE CONTRACT

- 28.1. The City may terminate any agreement resulting from this solicitation at any time, for any reason or for no reason, upon thirty days advance written notice to the contractor. In the event of such termination the contractor shall be compensated for services and work performed prior to termination.

29. AVAILABILITY OF FUNDS

- 29.1. Agreements are made subject to the appropriation of funds by the Staunton City Council and are null and void in the event of non-appropriation by the City Council. Non-appropriation of funds shall not be deemed a cancellation and shall terminate this agreement without recourse and with no liability on the part of the City.

30. SELECTION PROCESS/AWARD

- 30.1. Upon the award or the announcement of the decision to award a contract as a result of this solicitation, the department will publicly post such notice for a minimum of ten (10) days, or will notify all responsive bidders/offerors.

31. SAFETY AND OSHA STANDARDS

- 31.1. All parties performing services for the City shall comply with all Occupational Safety and Health Administration (OSHA), State Occupational Health Standards, and any other applicable rules and regulations. All parties shall be held responsible for the training, supervision, and safety of their employees. Any unsafe acts or hazardous conditions that may cause injury or damage to any persons or property within and around the work site areas under this contract shall be remedied per the regulatory agency's guidelines.

32. MODIFICATION & WITHDRAWAL OF BID

- 32.1. An offeror may modify or withdraw his bid, either personally or by written request, at any time prior to the scheduled time for opening of bids. After bid opening, Code of Virginia 2.2-4330 B. 1. shall apply: "The bidder shall give notice in writing of his claim of right to withdraw his bid within two business days after the conclusion of the bid opening procedure and shall submit original work papers with such notice."

33. CONTRACT TERM

- 33.1. The Offeror whose Bid is found to be the most advantageous to the City will be offered the opportunity to enter into an Agreement with the City. The scope, terms, and conditions of that

Agreement shall be in substantial conformance with the terms, conditions, and specifications described in this Invitation to Bid.

- 33.2. If, through any cause, the contractor shall fail to fulfill in a timely and proper manner the obligations agreed to, the City shall have the right to terminate the contract by specifying the date of termination in a written notice to the contractor at least thirty (30) days prior to the termination date. The City may terminate this contract without cause in the event funds are not appropriated the City of Staunton.
- 33.3. Part of the consideration will be the capability of the Offeror to immediately begin work and meet the proposed timetable above.
- 33.4. The City reserves the right to negotiate the Agreement, to include any portion or portions of the services covered by this Invitation to Bid, and to reject any and all bids in total or by components.
- 33.5. The contractor shall not assign or transfer any interest in the contract without prior written consent of the City.

34. COMPENSATION AND RECORD KEEPING

- 34.1. Total compensation for services will be negotiated between the City and the successful Offeror. The City retains the right to terminate contract negotiations if insufficient progress is being made to establish contract terms. The Offeror selected will be paid on a percentage of progress completed basis, as provided for in the contract or lump sum at completion or project. The contract will be written on a “cost not to exceed” basis. Records are to be kept by the Offeror in such detail as to properly reflect all direct or indirect costs of labor and material for which payment will be claimed.

35. PAYMENT

- 35.1. Appropriate personnel will make payment for all completed work only after final approval and acceptability of the work completed.

36. BID BOND

- 36.1. When specified, each bid shall be accompanied by a bid bond with surety satisfactory to the City or a cashier’s or certified check, made payable to the Treasurer, City of Staunton, in an amount equal to 5 percent of the total bid price. In the event of default by the bidder the 5 percent deposit shall represent liquidated damages to the City.

37. PERFORMANCE AND PAYMENT BONDS

- 37.1. Successful contractor agrees to provide a performance bond and a payment bond for any contract signed which exceeds \$50,000.

38. BID ADDENDA

- 38.1. Prior to submitting their bid, it is the bidder’s responsibility to check the City web-site for any addenda associated with this Invitation for Bid.

39. INSURANCE REQUIREMENTS

- 39.1. Insurance shall be in amounts not less than \$2,000,000, \$1,000,000, and \$1,000,000 respectively or such other insurance as is satisfactory and may be approved by the City. Insurance shall be written by companies licensed to do business in the Commonwealth of Virginia and shall list SCS as an additional insured.

40. CONTRACT TERMINATION

- 40.1. This contract will not be awarded to any vendor who has had a previous contract with the City of Staunton terminated for substantial non-compliance within the last three (3) years.

41. DEBARMENT STATUS

- 41.1. By submitting their bids/proposals, all bidders or offerors certify that they are not currently debarred from submitting bids or proposals on contracts by any public body of the Commonwealth of Virginia, nor are they an agent of any person or entity that is currently debarred from submitting bids on contracts by any public body of the Commonwealth of Virginia.

42. CONTRACTOR UNDERSTANDING

- 42.1. It is understood and agreed that the Contractor has, by careful examination, satisfied himself as to the nature and locations of the work, the character of equipment and facilities needed preliminary to and during the prosecution of the work, the general and local conditions and all other matters which in any way effect the work under this contract. No verbal agreement or conversation with any officer, agent or employee of the City either before or after the execution of this contract, shall affect or modify any of the terms or obligations herein contained.

43. DRUG-FREE WORKPLACE

- 43.1. During the performance of this contract, the contractor agrees to:
- 43.1.1. provide a drug-free workplace for the contractor's employees;
 - 43.1.2. post in conspicuous places, available to employees and applicants for employment, a statement notifying employees that the unlawful manufacture, sale, distribution, possession, or use of a controlled substance or marijuana is prohibited in the contractor's workplace and specifying the actions that will be taken against employees for violations of such prohibition;
 - 43.1.3. state in all solicitations or advertisements for employees placed by or on behalf of the contractor that the contractor maintains a drug-free workplace; and
 - 43.1.4. include the provisions of the foregoing clauses in every subcontract or purchase order of over \$10,000.00, so that the provisions will be binding upon each subcontractor or vendor.

44. NON-DISCRIMINATION

- 44.1. During the performance of this contract, the contractor agrees as follows:
- 44.1.1. The contractor will not discriminate against any employee or applicant for employment because of race, religion, color, sex, national origin, age, disability, or other basis prohibited by state law relating to discrimination in employment, except where there is a bona fide occupational qualification reasonably necessary to the normal operation of the contractor. The contractor agrees to post in conspicuous places, available to employees and the applicants for employment, notices setting forth the provisions of this nondiscrimination clause.
 - 44.1.2. The contractor, in all solicitations or advertisements for employees placed by or on behalf of the contractor, will state that such contractor is an equal opportunity employer.
 - 44.1.3. Notices, advertisements and solicitations placed in accordance with federal law, rule or regulation shall be deemed sufficient for the purpose of meeting the requirements of this section.

- 44.1.4. The contractor will include the provisions of the foregoing paragraphs 44.1.1, 44.1.2, 44.1.3 in every subcontract or purchase order of over \$10,000, so that the provisions will be binding upon each subcontractor or vendor.

45. PERMITS AND LICENSES

- 45.1. Any required City permits must be obtained by the contractor at the contractor's sole expense. The successful contractor must obtain at his/her own expense, the required business license from the City of Staunton, Commissioner of Revenue's Office prior to beginning work. All equipment and/or installation must meet all applicable local, State, and Federal codes.

46. NEGOTIATION WITH SUCCESSFUL BIDDER

- 46.1. Should the lowest bid for Base Bid exceed the City's budget, the City may proceed with negotiations with the lowest bidder for the Base Bid in accordance with section 2.2-4318 of the Code of Virginia to obtain a contract price within the funds available to the City. For the purpose of determining when such negotiations may take place, the term "available funds" shall mean those funds which were budgeted by the City for this contract (including all grant funding) prior to issuance of the written Invitation for Bids. Negotiations with the low bidder may include both modifications of the bid price and Scope of Work/Specifications to be performed. The City shall initiate such negotiations by written notice to the lowest responsive, responsible bidder that its bid exceeds the available funds and that the City wishes to negotiate a lower contract price. The times, places, and manner of negotiations shall be agreed to by the City and the lowest responsive bidder
- 46.2. The City reserves the right to negotiate contract terms with the successful offeror for items/services other than those specifically stated in this IFB in the best interest of the City and agreed to by the contractor, in accordance with § 2.2-4318 of the Code of Virginia. Additional work of reasonable scale shall be priced consistent with bid to allow for additions and future expansions.

47. COOPERATIVE PROCUREMENT

- 47.1. This procurement is being conducted on behalf of other public bodies, in accordance with § 2.2-4304 (A) of the Code of Virginia. If authorized by the bidder, the resultant contract may be extended to any public body in the Commonwealth of Virginia in accordance with contract terms.

48. IMMIGRATION REFORM AND CONTROL ACT OF 1986

- 48.1. During the performance of this contract, contractor agrees that they will not, and shall not knowingly employ an unauthorized alien as defined in the federal Immigration Reform and Control Act of 1986. (per 2.2-4311.1)

49. CERTIFICATION OF INTEREST & RELATIONSHIPS

- 49.1. The extent that either Contractor or any of Contractor's officers, directors, or executive employees, maintains a financial or familial relationship with any person acting for, or employed by, the City of Staunton, Staunton City Council, School Board or Staunton Public Schools, Contractor shall reveal such relationships. In accordance with this paragraph, Contractor shall execute the certification attached hereto and submit the certification contemporaneously with the executed Contract.

END OF PROCUREMENT GUIDELINES

WILEY|WILSON PROJECT MANUAL

Follows This Page

SECTION 012500 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for substitutions.
- B. Related Requirements:
 - 1. Section 016000 "Product Requirements" for requirements for submitting comparable product submittals for products by listed manufacturers.

1.3 DEFINITIONS

- A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.
 - 1. Substitutions for Cause: Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product, regulatory changes, or unavailability of required warranty terms.
 - 2. Substitutions for Convenience: Changes proposed by Contractor or Owner that are not required in order to meet other Project requirements but may offer advantage to Contractor or Owner.

1.4 ACTION SUBMITTALS

- A. Substitution Requests: Submit three copies of each request for consideration. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Substitution Request Form: Use facsimile of form provided in Project Manual.
 - 2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
 - a. Statement indicating why specified product or fabrication or installation method cannot be provided, if applicable.

- b. Coordination of information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors that will be necessary to accommodate proposed substitution.
 - c. Detailed comparison of significant qualities of proposed substitutions with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes, such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
 - d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
 - e. Samples, where applicable or requested.
 - f. Certificates and qualification data, where applicable or requested.
 - g. List of similar installations for completed projects, with project names and addresses as well as names and addresses of engineer and owners.
 - h. Material test reports from a qualified testing agency, indicating and interpreting test results for compliance with requirements indicated.
 - i. Research reports evidencing compliance with building code in effect for Project, from ICC-ES.
 - j. Detailed comparison of Contractor's construction schedule using proposed substitutions with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
 - k. Cost information, including a proposal of change, if any, in the Contract Sum.
 - l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents, except as indicated in substitution request, is compatible with related materials and is appropriate for applications indicated.
 - m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
3. Engineer's Action: If necessary, Engineer will request additional information or documentation for evaluation within seven days of receipt of a request for substitution. Engineer will notify Contractor of acceptance or rejection of proposed substitution within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
- a. Forms of Acceptance: Change Order, Construction Change Directive, or Engineer's Supplemental Instructions for minor changes in the Work.
 - b. Use product specified if Engineer does not issue a decision on use of a proposed substitution within time allocated.

1.5 QUALITY ASSURANCE

- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.

1.6 PROCEDURES

- A. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

1.7 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals.

- 1. Conditions: Engineer will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Engineer will return requests without action, except to record noncompliance with these requirements:

- a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - b. Substitution request is fully documented and properly submitted.
 - c. Requested substitution will not adversely affect Contractor's construction schedule.
 - d. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - e. Requested substitution is compatible with other portions of the Work.
 - f. Requested substitution has been coordinated with other portions of the Work.
 - g. Requested substitution provides specified warranty.
 - h. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

- B. Substitutions for Convenience: Engineer will consider requests for substitution if received within 60 days after the Notice to Proceed. Requests received after that time may be considered or rejected at discretion of Engineer.

- 1. Conditions: Engineer will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Engineer will return requests without action, except to record noncompliance with these requirements:

- a. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include

- compensation to Engineer for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
- b. Requested substitution does not require extensive revisions to the Contract Documents.
 - c. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - d. Substitution request is fully documented and properly submitted.
 - e. Requested substitution will not adversely affect Contractor's construction schedule.
 - f. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - g. Requested substitution is compatible with other portions of the Work.
 - h. Requested substitution has been coordinated with other portions of the Work.
 - i. Requested substitution provides specified warranty.
 - j. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012500

SECTION 012900 - PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements necessary to prepare and process Applications for Payment.
- B. Related Requirements:
 - 1. Section 012200 "Unit Prices" for administrative requirements governing the use of unit prices.
 - 2. Section 012600 "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.
 - 3. Section 013200 "Construction Progress Documentation" for administrative requirements governing the preparation and submittal of the Contractor's construction schedule.

1.3 DEFINITIONS

- A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

1.4 SCHEDULE OF VALUES

- A. Coordination: Coordinate preparation of the schedule of values with preparation of Contractor's construction schedule.
 - 1. Coordinate line items in the schedule of values with items required to be indicated as separate activities in Contractor's construction schedule.
 - 2. Submit the schedule of values to Engineer at earliest possible date, but no later than seven days before the date scheduled for submittal of initial Applications for Payment.
- B. Format and Content: Use Project Manual table of contents as a guide to establish line items for the schedule of values. Provide at least one line item for each Specification Section.
 - 1. Identification: Include the following Project identification on the schedule of values:

- a. Project name and location.
 - b. Name of Engineer.
 - c. Engineer's Project number.
 - d. Contractor's name and address.
 - e. Date of submittal.
2. Arrange schedule of values consistent with format of AIA Document G703, or approved alternate form with substantially the same content.
3. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Provide multiple line items for principal subcontract amounts in excess of five percent of the Contract Sum.
4. Provide a separate line item in the schedule of values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.
 - a. Differentiate between items stored on-site and items stored off-site.
5. Overhead Costs: Include total cost and proportionate share of general overhead and profit for each line item.
6. Schedule of Values Revisions: Revise the schedule of values when Change Orders or Construction Change Directives result in a change in the Contract Sum. Include at least one separate line item for each Change Order and Construction Change Directive.

1.5 APPLICATIONS FOR PAYMENT

- A. Each Application for Payment following the initial Application for Payment shall be consistent with previous applications and payments as certified by Engineer and paid for by Owner.
- B. Payment Application Times: Submit Application for Payment to Engineer by the 15th of the month. The period covered by each Application for Payment is one month, ending on the last day of the month.
 1. Submit draft copy of Application for Payment seven days prior to due date for review by Engineer.
- C. Application for Payment Forms: Use AIA Document G702 and AIA Document G703, or approved alternate form with substantially the same content, as form for Applications for Payment.
 1. Other Application for Payment forms proposed by the Contractor shall be acceptable to Engineer and Owner. Submit forms for approval with initial submittal of schedule of values.
- D. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Engineer will return incomplete applications without action.

1. Entries shall match data on the schedule of values and Contractor's construction schedule. Use updated schedules if revisions were made.
 2. Include amounts for work completed following previous Application for Payment, whether or not payment has been received. Include only amounts for work completed at time of Application for Payment.
 3. Include amounts of Change Orders and Construction Change Directives issued before last day of construction period covered by application.
 4. Indicate separate amounts for work being carried out under Owner-requested project acceleration.
- E. Stored Materials: Include in Application for Payment amounts applied for materials or equipment purchased or fabricated and stored, but not yet installed. Differentiate between items stored on-site and items stored off-site.
1. Provide certificate of insurance, evidence of transfer of title to Owner, and consent of surety to payment for stored materials.
 2. Provide supporting documentation that verifies amount requested, such as paid invoices. Match amount requested with amounts indicated on documentation; do not include overhead and profit on stored materials.
 3. Provide summary documentation for stored materials indicating the following:
 - a. Value of materials previously stored and remaining stored as of date of previous Applications for Payment.
 - b. Value of previously stored materials put in place after date of previous Application for Payment and on or before date of current Application for Payment.
 - c. Value of materials stored since date of previous Application for Payment and remaining stored as of date of current Application for Payment.
- F. Transmittal: Submit three signed and notarized original copies of each Application for Payment to Engineer by a method ensuring receipt. One copy shall include waivers of lien and similar attachments if required.
1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.
- G. Waivers of Mechanic's Lien: With each Application for Payment, submit waivers of mechanic's lien from entities lawfully entitled to file a mechanic's lien arising out of the Contract and related to the Work covered by the payment.
1. Submit partial waivers on each item for amount requested in previous application, after deduction for retainage, on each item.
 2. When an application shows completion of an item, submit conditional final or full waivers.
 3. Owner reserves the right to designate which entities involved in the Work must submit waivers.
 4. Submit final Application for Payment with or preceded by conditional final waivers from every entity involved with performance of the Work covered by the application who is lawfully entitled to a lien.
 5. Waiver Forms: Submit executed waivers of lien on forms acceptable to Owner.

- H. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:
1. List of subcontractors.
 2. Schedule of values.
 3. Contractor's construction schedule (preliminary if not final).
 4. Products list (preliminary if not final).
 5. Schedule of unit prices.
 6. Submittal schedule (preliminary if not final).
 7. List of Contractor's staff assignments.
 8. List of Contractor's principal consultants.
 9. Copies of building permits.
 10. Copies of authorizations and licenses from authorities having jurisdiction for performance of the Work.
 11. Initial progress report.
 12. Report of preconstruction conference.
- I. Application for Payment at Substantial Completion: After Engineer issues the Certificate of Substantial Completion, submit an Application for Payment showing 100 percent completion for portion of the Work claimed as substantially complete.
1. Include documentation supporting claim that the Work is substantially complete and a statement showing an accounting of changes to the Contract Sum.
 2. This application shall reflect Certificate(s) of Substantial Completion issued previously for Owner occupancy of designated portions of the Work.
- J. Final Payment Application: After completing Project closeout requirements, submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:
1. Evidence of completion of Project closeout requirements.
 2. Insurance certificates for products and completed operations where required and proof that taxes, fees, and similar obligations were paid.
 3. Updated final statement, accounting for final changes to the Contract Sum.
 4. AIA Document G706, or approved alternate form with substantially the same content.
 5. AIA Document G706A, or approved alternate form with substantially the same content.
 6. AIA Document G707, or approved alternate form with substantially the same content.
 7. Evidence that claims have been settled.
 8. Final meter readings for utilities, a measured record of stored fuel, and similar data as of date of Substantial Completion or when Owner took possession of and assumed responsibility for corresponding elements of the Work.
 9. Final liquidated damages settlement statement.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012900

SECTION 013100 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
 - 1. General coordination procedures.
 - 2. Coordination drawings.
 - 3. RFIs.
 - 4. Digital project management procedures.
 - 5. Project meetings.
- B. Related Requirements:
 - 1. Section 013200 "Construction Progress Documentation" for preparing and submitting Contractor's construction schedule.
 - 2. Section 017300 "Execution" for procedures for coordinating general installation and field-engineering services, including establishment of benchmarks and control points.
 - 3. Section 017700 "Closeout Procedures" for coordinating closeout of the Contract.

1.3 DEFINITIONS

- A. BIM: Building Information Modeling.
- B. RFI: Request for Information. Request from Owner, Engineer, or Contractor seeking information required by or clarifications of the Contract Documents.

1.4 INFORMATIONAL SUBMITTALS

- A. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:
 - 1. Name, address, telephone number, and email address of entity performing subcontract or supplying products.
 - 2. Number and title of related Specification Section(s) covered by subcontract.
 - 3. Drawing number and detail references, as appropriate, covered by subcontract.

- B. Key Personnel Names: Within 15 days of starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and cellular telephone numbers and e-mail addresses. Provide names, addresses, and telephone numbers of individuals assigned as alternates in the absence of individuals assigned to Project.

1.5 GENERAL COORDINATION PROCEDURES

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations included in different Sections that depend on each other for proper installation, connection, and operation.
 - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
 - 2. Coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair.
 - 3. Make adequate provisions to accommodate items scheduled for later installation.
- B. Prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
- C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
 - 1. Preparation of Contractor's construction schedule.
 - 2. Preparation of the schedule of values.
 - 3. Installation and removal of temporary facilities and controls.
 - 4. Delivery and processing of submittals.
 - 5. Progress meetings.
 - 6. Preinstallation conferences.
 - 7. Project closeout activities.
 - 8. Startup and adjustment of systems.

1.6 REQUEST FOR INFORMATION (RFI)

- A. General: Immediately on discovery of the need for additional information, clarification, or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.
 - 1. Engineer will return without response those RFIs submitted to Engineer by other entities controlled by Contractor.
 - 2. Coordinate and submit RFIs in a prompt manner so as to avoid delays in Contractor's work or work of subcontractors.

- B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:
1. Project name.
 2. Project number.
 3. Date.
 4. Name of Contractor.
 5. Name of Engineer.
 6. RFI number, numbered sequentially.
 7. RFI subject.
 8. Specification Section number and title and related paragraphs, as appropriate.
 9. Drawing number and detail references, as appropriate.
 10. Field dimensions and conditions, as appropriate.
 11. Contractor's suggested resolution. If Contractor's suggested resolution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
 12. Contractor's signature.
 13. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
- C. RFI Forms: AIA Document G716 or software-generated form with substantially the same content as indicated above, acceptable to Engineer.
1. Attachments shall be electronic files in PDF format.
- D. Engineer's Action: Engineer will review each RFI, determine action required, and respond. Allow seven working days for Engineer's response for each RFI. RFIs received by Engineer after 1:00 p.m. will be considered as received the following working day.
1. The following Contractor-generated RFIs will be returned without action:
 - a. Requests for approval of submittals.
 - b. Requests for approval of substitutions.
 - c. Requests for approval of Contractor's means and methods.
 - d. Requests for coordination information already indicated in the Contract Documents.
 - e. Requests for adjustments in the Contract Time or the Contract Sum.
 - f. Requests for interpretation of Engineer's actions on submittals.
 - g. Incomplete RFIs or inaccurately prepared RFIs.
 2. Engineer's action may include a request for additional information, in which case Engineer's time for response will date from time of receipt by Engineer of additional information.
 3. Engineer's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Section 012600 "Contract Modification Procedures."

- a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Engineer in writing within 10 days of receipt of the RFI response.
- E. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log weekly. Include the following:
1. Project name.
 2. Name and address of Contractor.
 3. Name and address of Engineer.
 4. RFI number including RFIs that were returned without action or withdrawn.
 5. RFI description.
 6. Date the RFI was submitted.
 7. Date Engineer response was received.
 8. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.
- F. On receipt of Engineer's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Engineer within seven days if Contractor disagrees with response.

1.7 DIGITAL PROJECT MANAGEMENT PROCEDURES

- A. Engineer's Data Files Not Available: Engineer will not provide Engineer's BIM model digital data files for Contractor's use during construction.
- B. PDF Document Preparation: Where PDFs are required to be submitted to Engineer, prepare as follows:
1. Assemble complete submittal package into a single indexed file incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
 2. Name file with submittal number or other unique identifier, including revision identifier.
 3. Certifications: Where digitally submitted certificates and certifications are required, provide a digital signature with digital certificate on where indicated.

1.8 PROJECT MEETINGS

- A. General: Schedule and conduct meetings and conferences at Project site unless otherwise indicated.
1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Engineer of scheduled meeting dates and times a minimum of 10 working days prior to meeting.
 2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.

- B. Preconstruction Conference: Engineer will schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner and Engineer, but no later than 15 days after execution of the Agreement.
1. Attendees: Authorized representatives of Owner Engineer, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Responsibilities and personnel assignments.
 - b. Tentative construction schedule.
 - c. Phasing.
 - d. Critical work sequencing and long lead items.
 - e. Designation of key personnel and their duties.
 - f. Lines of communications.
 - g. Procedures for processing field decisions and Change Orders.
 - h. Procedures for RFIs.
 - i. Procedures for testing and inspecting.
 - j. Procedures for processing Applications for Payment.
 - k. Distribution of the Contract Documents.
 - l. Submittal procedures.
 - m. Preparation of Record Documents.
 - n. Use of the premises and existing building.
 - o. Work restrictions.
 - p. Working hours.
 - q. Owner's occupancy requirements.
 - r. Responsibility for temporary facilities and controls.
 - s. Procedures for disruptions and shutdowns.
 - t. Construction waste management and recycling.
 - u. Parking availability.
 - v. Equipment deliveries and priorities.
 - w. First aid.
 - x. Security.
 - y. Progress cleaning.
- C. Project Closeout Conference: Schedule and conduct a project closeout conference, at a time convenient to Owner and Engineer, but no later than 60 days prior to the scheduled date of Substantial Completion.
1. Conduct the conference to review requirements and responsibilities related to Project closeout.
 2. Attendees: Authorized representatives of Owner, Engineer, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the meeting. Participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
 3. Agenda: Discuss items of significance that could affect or delay Project closeout, including the following:

- a. Preparation of Record Documents.
- b. Procedures required prior to inspection for Substantial Completion and for final inspection for acceptance.
- c. Procedures for completing and archiving web-based Project software site data files.
- d. Submittal of written warranties.
- e. Requirements for preparing operations and maintenance data.
- f. Requirements for demonstration and training.
- g. Preparation of Contractor's punch list.
- h. Procedures for processing Applications for Payment at Substantial Completion and for final payment.
- i. Submittal procedures.
- j. Owner's partial occupancy requirements.
- k. Responsibility for removing temporary facilities and controls.

D. Progress Meetings: Conduct progress meetings at monthly intervals.

1. Coordinate dates of meetings with preparation of payment requests.
2. Attendees: In addition to representatives of Owner and Engineer, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
3. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
 - a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - 1) Review schedule for next period.
 - b. Review present and future needs of each entity present, including the following:
 - 1) Interface requirements.
 - 2) Sequence of operations.
 - 3) Status of submittals.
 - 4) Deliveries.
 - 5) Off-site fabrication.
 - 6) Access.
 - 7) Site use.
 - 8) Temporary facilities and controls.
 - 9) Progress cleaning.

- 10) Quality and work standards.
 - 11) Status of correction of deficient items.
 - 12) Field observations.
 - 13) Status of RFIs.
 - 14) Status of Proposal Requests.
 - 15) Pending changes.
 - 16) Status of Change Orders.
 - 17) Pending claims and disputes.
 - 18) Documentation of information for payment requests.
- c. Schedule Updating: Revise Contractor's construction schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

SECTION 013200 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
 - 1. Startup construction schedule.
 - 2. Contractor's Construction Schedule.
 - 3. Construction schedule updating reports.
 - 4. Daily construction reports.
 - 5. Material location reports.
 - 6. Site condition reports.
 - 7. Unusual event reports.

- B. Related Requirements:

1.3 DEFINITIONS

- A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction Project. Activities included in a construction schedule consume time and resources.
 - 1. Critical Activity: An activity on the critical path that must start and finish on the planned early start and finish times.
 - 2. Predecessor Activity: An activity that precedes another activity in the network.
 - 3. Successor Activity: An activity that follows another activity in the network.
- B. Resource Loading: The allocation of manpower and equipment necessary for completing an activity as scheduled.

1.4 INFORMATIONAL SUBMITTALS

- A. Format for Submittals: Submit required submittals in the following format:
 - 1. Working electronic copy of schedule file, where indicated.
 - 2. PDF file.

- B. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.
- C. Construction Schedule Updating Reports: Submit with Applications for Payment.
- D. Daily Construction Reports: Submit at monthly intervals.
- E. Material Location Reports: Submit at monthly intervals.
- F. Site Condition Reports: Submit at time of discovery of differing conditions.
- G. Unusual Event Reports: Submit at time of unusual event.

1.5 COORDINATION

- A. Coordinate Contractor's Construction Schedule with the schedule of values, submittal schedule, progress reports, payment requests, and other required schedules and reports.
 - 1. Secure time commitments for performing critical elements of the Work from entities involved.
 - 2. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.

1.6 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

- A. Computer Scheduling Software: Prepare schedules using current version of a program that has been developed specifically to manage construction schedules.
- B. Time Frame: Extend schedule from date established for the Notice to Proceed to date of Substantial Completion.
 - 1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.
- C. Activities: Treat each floor or separate area as a separate numbered activity for each main element of the Work. Comply with the following:
 - 1. Activity Duration: Define activities so no activity is longer than 20 days, unless specifically allowed by Engineer.
 - 2. Submittal Review Time: Include review and resubmittal times indicated in Section 013300 "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's Construction Schedule with submittal schedule.
 - 3. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Engineer's administrative procedures necessary for certification of Substantial Completion.
 - 4. Punch List and Final Completion: Include not more than 30 days for completion of punch list items and final completion.

- D. Constraints: Include constraints and work restrictions indicated in the Contract Documents and as follows in schedule, and show how the sequence of the Work is affected.
1. Phasing: Arrange list of activities on schedule by phase.
 2. Work by Owner: Include a separate activity for each portion of the Work performed by Owner.
 3. Products Ordered in Advance: Include a separate activity for each product. Include delivery date indicated in Section 011000 "Summary." Delivery dates indicated stipulate the earliest possible delivery date.
 4. Owner-Furnished Products: Include a separate activity for each product. Include delivery date indicated in Section 011000 "Summary." Delivery dates indicated stipulate the earliest possible delivery date.
 5. Work Restrictions: Show the effect of the following items on the schedule:
 - a. Coordination with existing construction.
 - b. Limitations of continued occupancies.
 - c. Uninterruptible services.
 - d. Partial occupancy before Substantial Completion.
 - e. Use-of-premises restrictions.
 - f. Provisions for future construction.
 - g. Seasonal variations.
 - h. Environmental control.
 6. Work Stages: Indicate important stages of construction for each major portion of the Work, including, but not limited to, the following:
 - a. Subcontract awards.
 - b. Submittals.
 - c. Purchases.
 - d. Fabrication.
 - e. Sample testing.
 - f. Deliveries.
 - g. Installation.
 - h. Tests and inspections.
 - i. Curing.
- E. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and final completion.
- F. Cost Correlation: Superimpose a cost correlation timeline, indicating planned and actual costs. On the line, show planned and actual dollar volume of the Work performed as of planned and actual dates used for preparation of payment requests.
1. See Section 012900 "Payment Procedures" for cost reporting and payment procedures.
- G. Upcoming Work Summary: Prepare summary report indicating activities scheduled to occur or commence prior to submittal of next schedule update. Summarize the following issues:
1. Unresolved issues.

2. Unanswered Requests for Information.
 3. Rejected or unreturned submittals.
 4. Notations on returned submittals.
 5. Pending modifications affecting the Work and the Contract Time.
- H. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.
1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
 2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
 3. As the Work progresses, indicate final completion percentage for each activity.
- I. Recovery Schedule: When periodic update indicates the Work is 14 or more calendar days behind the current approved schedule, submit a separate recovery schedule indicating means by which Contractor intends to regain compliance with the schedule. Indicate changes to working hours, working days, crew sizes, equipment required to achieve compliance, and date by which recovery will be accomplished.
- J. Distribution: Distribute copies of approved schedule to Engineer, Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.
1. Post copies in Project meeting rooms and temporary field offices.
 2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.
- 1.7 GANTT-CHART SCHEDULE REQUIREMENTS
- A. Gantt-Chart Schedule: Submit a comprehensive, fully developed, horizontal, Gantt-chart-type, Contractor's Construction Schedule within 30 days of date established for the Notice to Proceed.
1. Base schedule on the startup construction schedule and additional information received since the start of Project.
- B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line.
1. For construction activities that require three months or longer to complete, indicate an estimated completion percentage in 10 percent increments within time bar.

1.8 REPORTS

- A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:
1. List of subcontractors at Project site.
 2. Approximate count of personnel at Project site.
 3. Equipment at Project site.
 4. Material deliveries.
 5. High and low temperatures and general weather conditions, including presence of rain or snow.
 6. Testing and inspection.
 7. Accidents.
 8. Meetings and significant decisions.
 9. Unusual events.
 10. Stoppages, delays, shortages, and losses.
 11. Meter readings and similar recordings.
 12. Emergency procedures.
 13. Orders and requests of authorities having jurisdiction.
 14. Change Orders received and implemented.
 15. Construction Change Directives received and implemented.
 16. Services connected and disconnected.
 17. Equipment or system tests and startups.
 18. Partial completions and occupancies.
 19. Substantial Completions authorized.
- B. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.
- C. Unusual Event Reports: When an event of an unusual and significant nature occurs at Project site, whether or not related directly to the Work, prepare and submit a special report. List chain of events, persons participating, responses by Contractor's personnel, evaluation of results or effects, and similar pertinent information. Advise Owner in advance when these events are known or predictable.
1. Submit unusual event reports directly to Owner within two day(s) of an occurrence. Distribute copies of report to parties affected by the occurrence.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013200

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Submittal schedule requirements.
 - 2. Administrative and procedural requirements for submittals.

- B. Related Requirements:

- 1. Section 012900 "Payment Procedures" for submitting Applications for Payment and the schedule of values.
 - 2. Section 013100 "Project Management and Coordination" for submitting coordination drawings and subcontract list and for requirements for web-based Project software.
 - 3. Section 013200 "Construction Progress Documentation" for submitting schedules and reports, including Contractor's construction schedule.
 - 4. Section 014000 "Quality Requirements" for submitting test and inspection reports, and schedule of tests and inspections.
 - 5. Section 017700 "Closeout Procedures" for submitting closeout submittals and maintenance material submittals.
 - 6. Section 017839 "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.

1.3 DEFINITIONS

- A. Action Submittals: Written and graphic information and physical samples that require Engineer's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."
- B. Informational Submittals: Written and graphic information and physical samples that do not require Engineer's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."

1.4 SUBMITTAL SCHEDULE

- A. Submittal Schedule: Submit, as an action submittal, a list of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or revisions to submittals noted by Engineer and additional time for handling and reviewing submittals required by those corrections.
1. Coordinate submittal schedule with list of subcontracts, the schedule of values, and Contractor's construction schedule.
 2. Final Submittal: Submit concurrently with the first complete submittal of Contractor's construction schedule.
 - a. Submit revised submittal schedule to reflect changes in current status and timing for submittals.
 3. Format: Arrange the following information in a tabular format:
 - a. Scheduled date for first submittal.
 - b. Specification Section number and title.
 - c. Submittal Category: Action; informational.
 - d. Name of subcontractor.
 - e. Description of the Work covered.
 - f. Scheduled date for Engineer's final release or approval.

1.5 SUBMITTAL FORMATS

- A. Submittal Information: Include the following information in each submittal:
1. Project name.
 2. Date.
 3. Name of Engineer.
 4. Name of Contractor.
 5. Name of firm or entity that prepared submittal.
 6. Names of subcontractor, manufacturer, and supplier.
 7. Unique submittal number, including revision identifier. Include Specification Section number with sequential alphanumeric identifier; and alphanumeric suffix for resubmittals.
 8. Category and type of submittal.
 9. Submittal purpose and description.
 10. Number and title of Specification Section, with paragraph number and generic name for each of multiple items.
 11. Drawing number and detail references, as appropriate.
 12. Indication of full or partial submittal.
 13. Location(s) where product is to be installed, as appropriate.
 14. Other necessary identification.
 15. Remarks.
 16. Signature of transmitter.

- B. Options: Identify options requiring selection by Engineer.
- C. Deviations and Additional Information: On each submittal, clearly indicate deviations from requirements in the Contract Documents, including minor variations and limitations; include relevant additional information and revisions, other than those requested by Engineer on previous submittals. Indicate by highlighting on each submittal or noting on attached separate sheet.
- D. PDF Submittals: Prepare submittals as PDF package, incorporating complete information into each PDF file. Name PDF file with submittal number.

1.6 SUBMITTAL PROCEDURES

- A. Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.
 - 1. Email: Prepare submittals as PDF package, and transmit to Engineer by sending via email. Include PDF transmittal form. Include information in email subject line as requested by Engineer.
 - a. Engineer will return annotated file. Annotate and retain one copy of file as a digital Project Record Document file.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - 2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
 - 3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.
 - 4. Coordinate transmittal of submittals for related parts of the Work specified in different Sections so processing will not be delayed because of need to review submittals concurrently for coordination.
 - a. Engineer reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Engineer's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
 - 1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Engineer will advise Contractor when a submittal being processed must be delayed for coordination.
 - 2. Intermediate Review: If intermediate submittal is necessary, process it in same manner as initial submittal.

3. Resubmittal Review: Allow 15 days for review of each resubmittal.
 4. Sequential Review: Where sequential review of submittals by Owner, or other parties is indicated, allow 21 days for initial review of each submittal.
- D. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.
1. Note date and content of previous submittal.
 2. Note date and content of revision in label or title block and clearly indicate extent of revision.
 3. Resubmit submittals until they are marked with approval notation from Engineer's action stamp.
- E. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- F. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from Engineer's action stamp.

1.7 SUBMITTAL REQUIREMENTS

- A. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
1. If information must be specially prepared for submittal because standard published data are unsuitable for use, submit as Shop Drawings, not as Product Data.
 2. Mark each copy of each submittal to show which products and options are applicable.
 3. Include the following information, as applicable:
 - a. Manufacturer's catalog cuts.
 - b. Manufacturer's product specifications.
 - c. Standard color charts.
 - d. Statement of compliance with specified referenced standards.
 - e. Testing by recognized testing agency.
 - f. Application of testing agency labels and seals.
 - g. Notation of coordination requirements.
 - h. Availability and delivery time information.
 4. Submit Product Data before Shop Drawings, and before or concurrent with Samples.
- B. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.
1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
 - a. Identification of products.
 - b. Schedules.

- c. Compliance with specified standards.
 - d. Notation of coordination requirements.
 - e. Notation of dimensions established by field measurement.
 - f. Relationship and attachment to adjoining construction clearly indicated.
 - g. Seal and signature of professional engineer if specified.
- C. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other materials.
- 1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
 - 2. Identification: Permanently attach label on unexposed side of Samples that includes the following:
 - a. Project name and submittal number.
 - b. Generic description of Sample.
 - c. Product name and name of manufacturer.
 - d. Sample source.
 - e. Number and title of applicable Specification Section.
 - f. Specification paragraph number and generic name of each item.
 - 3. Email Transmittal: Provide PDF transmittal. Include digital image file illustrating Sample characteristics, and identification information for record.
 - 4. Paper Transmittal: Include paper transmittal including complete submittal information indicated.
 - 5. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
 - a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
 - b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
 - 6. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
 - a. Number of Samples: Submit one full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Engineer will return submittal with options selected.
 - 7. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.

- a. Number of Samples: Submit three sets of Samples. Engineer will retain two Sample sets; remainder will be returned.
 - 1) Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.
 - 2) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- D. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:
 1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
 2. Manufacturer and product name, and model number if applicable.
 3. Location within structure.
- E. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of Engineer and owners, and other information specified.
- F. Design Data: Prepare and submit written and graphic information indicating compliance with indicated performance and design criteria in individual Specification Sections. Include list of assumptions and summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Number each page of submittal.
- G. Certificates:
 1. Certificates and Certifications Submittals: Submit a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity. Provide a notarized signature where indicated.
 2. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
 3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
 4. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
 5. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
 6. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS forms. Include names of firms and personnel certified.

H. Test and Research Reports:

1. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.
2. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
3. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
4. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
5. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
6. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:
 - a. Name of evaluation organization.
 - b. Date of evaluation.
 - c. Time period when report is in effect.
 - d. Product and manufacturers' names.
 - e. Description of product.
 - f. Test procedures and results.
 - g. Limitations of use.

1.8 DELEGATED-DESIGN SERVICES

- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
 1. If criteria indicated are insufficient to perform services or certification required, submit a written request for additional information to Engineer.
- B. Delegated-Design Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally signed PDF file of certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.

1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

1.9 CONTRACTOR'S REVIEW

- A. Action Submittals and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Engineer.
- B. Contractor's Approval: Indicate Contractor's approval for each submittal with a uniform approval stamp. Include name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.
 1. Engineer will not review submittals received from Contractor that do not have Contractor's review and approval.

1.10 ENGINEER'S REVIEW

- A. Action Submittals: Engineer will review each submittal, indicate corrections or revisions required, and return it.
 1. PDF Submittals: Engineer will indicate, via markup on each submittal, the appropriate action.
- B. Informational Submittals: Engineer will review each submittal and will not return it, or will return it if it does not comply with requirements. Engineer will forward each submittal to appropriate party.
- C. Partial submittals prepared for a portion of the Work will be reviewed when use of partial submittals has received prior approval from Engineer.
- D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review.
- E. Engineer will return without review submittals received from sources other than Contractor.
- F. Submittals not required by the Contract Documents will be returned by Engineer without action.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013300

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspection services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
 - 1. Specific quality-assurance and quality-control requirements for individual work results are specified in their respective Specification Sections. Requirements in individual Sections may also cover production of standard products.
 - 2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and quality-control procedures that facilitate compliance with the Contract Document requirements.
 - 3. Requirements for Contractor to provide quality-assurance and quality-control services required by Engineer, Owner, or authorities having jurisdiction are not limited by provisions of this Section.
 - 4. Specific test and inspection requirements are not specified in this Section.

1.3 DEFINITIONS

- A. Experienced: When used with an entity or individual, "experienced" unless otherwise further described means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.
- B. Field Quality-Control Tests: Tests and inspections that are performed on-site for installation of the Work and for completed Work.
- C. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, assembly, and similar operations.

1. Use of trade-specific terminology in referring to a trade or entity does not require that certain construction activities be performed by accredited or unionized individuals, or that requirements specified apply exclusively to specific trade(s).
 - D. Mockups: Full-size physical assemblies that are constructed on-site either as freestanding temporary built elements or as part of permanent construction. Mockups are constructed to verify selections made under Sample submittals; to demonstrate aesthetic effects and qualities of materials and execution; to review coordination, testing, or operation; to show interface between dissimilar materials; and to demonstrate compliance with specified installation tolerances. Mockups are not Samples. Unless otherwise indicated, approved mockups establish the standard by which the Work will be judged.
 - E. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria.
 - F. Product Tests: Tests and inspections that are performed by a nationally recognized testing laboratory (NRTL) according to 29 CFR 1910.7, by a testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program (NVLAP), or by a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.
 - G. Source Quality-Control Tests: Tests and inspections that are performed at the source; for example, plant, mill, factory, or shop.
 - H. Testing Agency: An entity engaged to perform specific tests, inspections, or both. Testing laboratory shall mean the same as testing agency.
 - I. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
 - J. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Contractor's quality-control services do not include contract administration activities performed by Engineer.
- 1.4 DELEGATED-DESIGN SERVICES
- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
 1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Engineer.

1.5 CONFLICTING REQUIREMENTS

- A. **Conflicting Standards and Other Requirements:** If compliance with two or more standards or requirements are specified and the standards or requirements establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer conflicting requirements that are different, but apparently equal, to Engineer for direction before proceeding.
- B. **Minimum Quantity or Quality Levels:** The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Engineer for a decision before proceeding.

1.6 ACTION SUBMITTALS

- A. **Delegated-Design Services Submittal:** In addition to Shop Drawings, Product Data, and other required submittals, submit a statement signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional, indicating that the products and systems are in compliance with performance and design criteria indicated. Include list of codes, loads, and other factors used in performing these services.

1.7 INFORMATIONAL SUBMITTALS

- A. **Contractor's Quality-Control Plan:** For quality-assurance and quality-control activities and responsibilities.
- B. **Qualification Data:** For Contractor's quality-control personnel.
- C. **Contractor's Statement of Responsibility:** When required by authorities having jurisdiction, submit copy of written statement of responsibility submitted to authorities having jurisdiction before starting work on the following systems:
 - 1. Seismic-force-resisting system, designated seismic system, or component listed in the Statement of Special Inspections.
 - 2. Main wind-force-resisting system or a wind-resisting component listed in the Statement of Special Inspections.
- D. **Testing Agency Qualifications:** For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.
- E. **Reports:** Prepare and submit certified written reports and documents as specified.

- F. Permits, Licenses, and Certificates: For Owner's record, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents established for compliance with standards and regulations bearing on performance of the Work.

1.8 CONTRACTOR'S QUALITY-CONTROL PLAN

- A. Quality-Control Plan, General: Submit quality-control plan within 10 days of Notice to Proceed, and not less than five days prior to preconstruction conference. Submit in format acceptable to Engineer. Identify personnel, procedures, controls, instructions, tests, records, and forms to be used to carry out Contractor's quality-assurance and quality-control responsibilities. Coordinate with Contractor's Construction Schedule.
- B. Quality-Control Personnel Qualifications: Engage qualified personnel trained and experienced in managing and executing quality-assurance and quality-control procedures similar in nature and extent to those required for Project.
 - 1. Project quality-control manager may also serve as Project superintendent.
- C. Submittal Procedure: Describe procedures for ensuring compliance with requirements through review and management of submittal process. Indicate qualifications of personnel responsible for submittal review.
- D. Testing and Inspection: In quality-control plan, include a comprehensive schedule of Work requiring testing or inspection, including the following:
 - 1. Contractor-performed tests and inspections including Subcontractor-performed tests and inspections. Include required tests and inspections and Contractor-elected tests and inspections. Distinguish source quality-control tests and inspections from field quality-control tests and inspections.
 - 2. Special inspections required by authorities having jurisdiction and indicated on the Statement of Special Inspections.
 - 3. Owner-performed tests and inspections indicated in the Contract Documents.
- E. Continuous Inspection of Workmanship: Describe process for continuous inspection during construction to identify and correct deficiencies in workmanship in addition to testing and inspection specified. Indicate types of corrective actions to be required to bring work into compliance with standards of workmanship established by Contract requirements and approved mockups.
- F. Monitoring and Documentation: Maintain testing and inspection reports including log of approved and rejected results. Include work Engineer has indicated as nonconforming or defective. Indicate corrective actions taken to bring nonconforming work into compliance with requirements. Comply with requirements of authorities having jurisdiction.

1.9 REPORTS AND DOCUMENTS

- A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:
1. Date of issue.
 2. Project title and number.
 3. Name, address, telephone number, and email address of testing agency.
 4. Dates and locations of samples and tests or inspections.
 5. Names of individuals making tests and inspections.
 6. Description of the Work and test and inspection method.
 7. Identification of product and Specification Section.
 8. Complete test or inspection data.
 9. Test and inspection results and an interpretation of test results.
 10. Record of temperature and weather conditions at time of sample taking and testing and inspection.
 11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
 12. Name and signature of laboratory inspector.
 13. Recommendations on retesting and reinspecting.
- B. Manufacturer's Technical Representative's Field Reports: Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, telephone number, and email address of technical representative making report.
 2. Statement on condition of substrates and their acceptability for installation of product.
 3. Statement that products at Project site comply with requirements.
 4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
 5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 6. Statement whether conditions, products, and installation will affect warranty.
 7. Other required items indicated in individual Specification Sections.
- C. Factory-Authorized Service Representative's Reports: Prepare written information documenting manufacturer's factory-authorized service representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, telephone number, and email address of factory-authorized service representative making report.
 2. Statement that equipment complies with requirements.
 3. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 4. Statement whether conditions, products, and installation will affect warranty.
 5. Other required items indicated in individual Specification Sections.

1.10 QUALITY ASSURANCE

- A. General: Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.
- B. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units. As applicable, procure products from manufacturers able to meet qualification requirements, warranty requirements, and technical or factory-authorized service representative requirements.
- C. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- D. Installer Qualifications: A firm or individual experienced in installing, erecting, applying, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.
- E. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that are similar in material, design, and extent to those indicated for this Project.
- F. Specialists: Certain Specification Sections require that specific construction activities shall be performed by entities who are recognized experts in those operations. Specialists shall satisfy qualification requirements indicated and shall be engaged for the activities indicated.
 - 1. Requirements of authorities having jurisdiction shall supersede requirements for specialists.
- G. Testing Agency Qualifications: An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspection indicated, as documented according to ASTM E 329; and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.
- H. Manufacturer's Technical Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- I. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.

1.11 QUALITY CONTROL

- A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.
1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspection they are engaged to perform.
 2. Payment for these services will be made from testing and inspection allowances, as authorized by Change Orders.
 3. Costs for retesting and reinspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to Contractor, and the Contract Sum will be adjusted by Change Order.
- B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are the Contractor's responsibility. Perform additional quality-control activities, whether specified or not, to verify and document that the Work complies with requirements.
1. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.
 2. Engage a qualified testing agency to perform quality-control services.
 - a. Contractor shall not employ same entity engaged by Owner, unless agreed to in writing by Owner.
 3. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspection will be performed.
 4. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
 5. Testing and inspection requested by Contractor and not required by the Contract Documents are the Contractor's responsibility.
 6. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- D. Testing Agency Responsibilities: Cooperate with Engineer and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Engineer and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
 2. Determine the locations from which test samples will be taken and in which in-situ tests are conducted.
 3. Conduct and interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from requirements.

4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
 5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform duties of Contractor.
- E. Manufacturer's Field Services: Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Section 013300 "Submittal Procedures."
- F. Manufacturer's Technical Services: Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.
- G. Associated Contractor Services: Cooperate with agencies and representatives performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspection. Assist agency in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Delivery of samples to testing agencies.
 6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
 7. Security and protection for samples and for testing and inspection equipment at Project site.
- H. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and quality-control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspection.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
- 1.12 SPECIAL INSPECTIONS
- A. Special Inspections: Owner will engage a qualified special inspector to conduct special inspections required by authorities having jurisdiction as the responsibility of Owner, and as follows:
1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures and reviewing the completeness and adequacy of those procedures to perform the Work.

2. Notifying Engineer and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
3. Submitting a certified written report of each test, inspection, and similar quality-control service to Engineer with copy to Contractor and to authorities having jurisdiction.
4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
5. Interpreting tests and inspections and stating in each report whether tested and inspected work complies with or deviates from the Contract Documents.
6. Retesting and reinspecting corrected work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

- A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:
 1. Date test or inspection was conducted.
 2. Description of the Work tested or inspected.
 3. Date test or inspection results were transmitted to Engineer.
 4. Identification of testing agency or special inspector conducting test or inspection.
- B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Engineer reference during normal working hours.
 1. Submit log at Project closeout as part of Project Record Documents.

3.2 REPAIR AND PROTECTION

- A. General: On completion of testing, inspection, sample taking, and similar services, repair damaged construction and restore substrates and finishes.
 1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Section 017300 "Execution."
- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 014000

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- B. Related Requirements:
 - 1. Section 011000 "Summary" for work restrictions and limitations on utility interruptions.

1.3 USE CHARGES

- A. General: Installation and removal of and use charges for temporary facilities shall be included in the Contract Sum unless otherwise indicated. Allow other entities engaged in the Project to use temporary services and facilities without cost, including, but not limited to, Owner's construction forces, Engineer, testing agencies, and authorities having jurisdiction.
- B. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.
- C. Electric Power Service from Existing System: Electric power from Owner's existing system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

1.4 INFORMATIONAL SUBMITTALS

- A. Site Utilization Plan: Show temporary facilities, temporary utility lines and connections, staging areas, construction site entrances, vehicle circulation, and parking areas for construction personnel.
- B. Project Identification and Temporary Signs: Show fabrication and installation details, including plans, elevations, details, layouts, typestyles, graphic elements, and message content.

1.5 QUALITY ASSURANCE

- A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.
- C. Accessible Temporary Egress: Comply with applicable provisions in the United States Access Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

1.6 PROJECT CONDITIONS

- A. Temporary Use of Permanent Facilities: Engage Installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Chain-Link Fencing: Minimum 2-inch (50-mm), 0.148-inch- (3.8-mm-) thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet (1.8 m) high with galvanized-steel pipe posts; minimum 2-3/8-inch- (60-mm-) OD line posts and 2-7/8-inch- (73-mm-) OD corner and pull posts.
- B. Portable Chain-Link Fencing: Minimum 2-inch (50-mm), 0.148-inch- (3.8-mm-) thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet (1.8 m) high with galvanized-steel pipe posts; minimum 2-3/8-inch- (60-mm-) OD line posts and 2-7/8-inch- (73-mm-) OD corner and pull posts, with 1-5/8-inch- (42-mm-) OD top and bottom rails. Provide galvanized-steel bases for supporting posts.
- C. Fencing Windscreen Privacy Screen: Polyester fabric scrim with grommets for attachment to chain link fence, sized to height of fence, in color selected by Engineer from manufacturer's standard colors.

2.2 TEMPORARY FACILITIES

- A. Field Offices, General: Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.
- B. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.
 - 1. Store combustible materials apart from building.

2.3 EQUIPMENT

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. HVAC Equipment: Unless Owner authorizes use of permanent HVAC system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.
 - 1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
 - 2. Heating Units: Listed and labeled for type of fuel being consumed, by a qualified testing agency acceptable to authorities having jurisdiction, and marked for intended location and application.

PART 3 - EXECUTION

3.1 TEMPORARY FACILITIES, GENERAL

- A. Conservation: Coordinate construction and use of temporary facilities with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.
 - 1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. See other Sections for disposition of salvaged materials that are designated as Owner's property.

3.2 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
 - 1. Locate facilities to limit site disturbance as specified in Section 011000 "Summary."
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.3 TEMPORARY UTILITY INSTALLATION

- A. General: Install temporary service or connect to existing service.
 - 1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
- B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.

1. Connect temporary sewers to municipal system as directed by authorities having jurisdiction.
- C. Water Service: Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
- D. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
 1. Toilets: Use of Owner's existing toilet facilities will not be permitted.
- E. Temporary Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.
- F. Isolation of Work Areas in Occupied Facilities: Prevent dust, fumes, and odors from entering occupied areas.
 1. Maintain dust partitions during the Work. Use vacuum collection attachments on dust-producing equipment. Isolate limited work within occupied areas using portable dust-containment devices.
 2. Perform daily construction cleanup and final cleanup using approved, HEPA-filter-equipped vacuum equipment.
- G. Electric Power Service: Connect to Owner's existing electric power service. Maintain equipment in a condition acceptable to Owner.
 1. Connect temporary service to Owner's existing power source, as directed by Owner.
- H. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.
 1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.
- I. Telephone Service: Provide temporary telephone service in common-use facilities for use by all construction personnel.
 1. At each telephone, post a list of important telephone numbers.
 - a. Police and fire departments.
 - b. Ambulance service.
 - c. Contractor's home office.
 - d. Contractor's emergency after-hours telephone number.
 - e. Engineers' offices.
 - f. Owner's office.

- g. Principal subcontractors' field and home offices.

3.4 SUPPORT FACILITIES INSTALLATION

A. General: Comply with the following:

1. Provide construction for temporary offices, shops, and sheds located within construction area or within 30 feet (9 m) of building lines that is noncombustible according to ASTM E 136. Comply with NFPA 241.
2. Maintain support facilities until Engineer schedules the Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.

B. Traffic Controls: Comply with requirements of authorities having jurisdiction.

1. Protect existing site improvements to remain including curbs, pavement, and utilities.
2. Maintain access for fire-fighting equipment and access to fire hydrants.

C. Parking: Use designated areas of Owner's existing parking areas for construction personnel.

D. Project Signs: Provide Project signs as indicated. Unauthorized signs are not permitted.

1. Identification Signs: Provide Project identification signs as indicated on Drawings.
2. Temporary Signs: Provide other signs as indicated and as required to inform public and individuals seeking entrance to Project.

- a. Provide temporary, directional signs for construction personnel and visitors.

3. Maintain and touch up signs so they are legible at all times.

E. Waste Disposal Facilities: Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction. Comply with progress cleaning requirements in Section 017300 "Execution."

F. Existing Elevator Use: Use of Owner's existing elevators will be permitted, provided elevators are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion, restore elevators to condition existing before initial use, including replacing worn cables, guide shoes, and similar items of limited life.

1. Do not load elevators beyond their rated weight capacity.
2. Provide protective coverings, barriers, devices, signs, or other procedures to protect elevator car and entrance doors and frame. If, despite such protection, elevators become damaged, engage elevator Installer to restore damaged work so no evidence remains of correction work. Return items that cannot be refinished in field to the shop, make required repairs and refinish entire unit, or provide new units as required.

- G. Existing Stair Usage: Use of Owner's existing stairs will be permitted, provided stairs are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion, restore stairs to condition existing before initial use.
1. Provide protective coverings, barriers, devices, signs, or other procedures to protect stairs and to maintain means of egress. If stairs become damaged, restore damaged areas so no evidence remains of correction work.

3.5 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.
1. Where access to adjacent properties is required in order to affect protection of existing facilities, obtain written permission from adjacent property owner to access property for that purpose.
- B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
1. Comply with work restrictions specified in Section 011000 "Summary."
- C. Site Enclosure Fence: Before construction operations begin, furnish and install site enclosure fence in a manner that will prevent people from easily entering site except by entrance gates.
1. Extent of Fence: As required to enclose entire Project site or portion determined sufficient to accommodate construction operations.
- D. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.
- E. Temporary Egress: Maintain temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction.
- F. Covered Walkway: Erect protective, covered walkway for passage of individuals through or adjacent to Project site. Coordinate with entrance gates, other facilities, and obstructions. Comply with regulations of authorities having jurisdiction.
1. Provide overhead decking, protective enclosure walls, handrails, barricades, warning signs, exit signs, lights, safe and well-drained walkways, and similar provisions for protection and safe passage.
 2. Paint and maintain appearance of walkway for duration of the Work.
- G. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.

1. Prohibit smoking in construction areas. Comply with additional limits on smoking specified in other Sections.
2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.

3.6 OPERATION, TERMINATION, AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
- B. Maintenance: Maintain facilities in good operating condition until removal.
 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
- C. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.
- D. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
 1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.
 2. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 017700 "Closeout Procedures."

END OF SECTION 015000

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.

1.3 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
 - 3. Comparable Product: Product that is demonstrated and approved by Engineer through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a single manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation. In addition to the basis-of-design product description, product attributes and characteristics may be listed to establish the significant qualities related to type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other special features and requirements for purposes of evaluating comparable products of additional manufacturers named in the specification.
- C. Subject to Compliance with Requirements: Where the phrase "Subject to compliance with requirements" introduces a product selection procedure in an individual Specification Section, provide products qualified under the specified product procedure. In the event that a named product or product by a named manufacturer does not meet the other requirements of the specifications, select another named product or product from another named manufacturer that

does meet the requirements of the specifications. Submit a comparable product request, if applicable.

1.4 ACTION SUBMITTALS

- A. Comparable Product Request Submittal: Submit request for consideration of each comparable product. Identify basis-of-design product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Include data to indicate compliance with the requirements specified in "Comparable Products" Article.
 - 2. Engineer's Action: If necessary, Engineer will request additional information or documentation for evaluation within seven days of receipt of a comparable product request. Engineer will notify Contractor of approval or rejection of proposed comparable product request within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
 - a. Form of Engineer's Approval of Submittal: As specified in Section 013300 "Submittal Procedures."
 - b. Use product specified if Engineer does not issue a decision on use of a comparable product request within time allocated.
- B. Basis-of-Design Product Specification Submittal: Comply with requirements in Section 013300 "Submittal Procedures." Show compliance with requirements.

1.5 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.
- B. Identification of Products: Except for required labels and operating data, do not attach or imprint manufacturer or product names or trademarks on exposed surfaces of products or equipment that will be exposed to view in occupied spaces or on the exterior.
 - 1. Labels: Locate required product labels and stamps on a concealed surface, or, where required for observation following installation, on a visually accessible surface that is not conspicuous.
 - 2. Equipment Nameplates: Provide a permanent nameplate on each item of service-connected or power-operated equipment. Locate on a visually accessible but inconspicuous surface. Include information essential for operation, including the following:
 - a. Name of product and manufacturer.
 - b. Model and serial number.
 - c. Capacity.
 - d. Speed.
 - e. Ratings.

3. See individual identification sections in Division 26 for additional identification requirements.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.
- B. Delivery and Handling:
 1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
 2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
 4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.
- C. Storage:
 1. Store products to allow for inspection and measurement of quantity or counting of units.
 2. Store materials in a manner that will not endanger Project structure.
 3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
 4. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
 5. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
 6. Protect stored products from damage and liquids from freezing.

1.7 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
 1. Manufacturer's Warranty: Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
 2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner.

- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.
 - 1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
 - 2. Specified Form: When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
 - 3. See other Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Section 017700 "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
 - 1. Provide products complete with accessories needed for a complete installation and indicated use and effect.
 - 2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
 - 3. Owner reserves the right to limit selection to products with warranties meeting requirements of the Contract Documents.
 - 4. Where products are accompanied by the term "as selected," Engineer will make selection.
 - 5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
 - 6. Or Equal: For products specified by name and accompanied by the term "or equal," or "or approved equal," or "or approved," comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product.
 - a. Submit additional documentation required by Engineer in order to establish equivalency of proposed products. Evaluation of "or equal" product status is by the Engineer whose determination is final.
- B. Product Selection Procedures:
 - 1. Limited List of Manufacturers: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will be considered.
 - a. Limited list of manufacturers is indicated by the phrase: "Subject to compliance with requirements, provide products by one of the following..."

2. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.
 - a. For approval of products by unnamed manufacturers, comply with requirements in Section 012500 "Substitution Procedures" for substitutions for convenience.
- C. Visual Selection Specification: Where Specifications include the phrase "as selected by Engineer from manufacturer's full range" or similar phrase, select a product that complies with requirements. Engineer will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration of Comparable Products: Engineer will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Engineer may return requests without action, except to record noncompliance with these requirements:
 1. Evidence that proposed product does not require revisions to the Contract Documents, is consistent with the Contract Documents, will produce the indicated results, and is compatible with other portions of the Work. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant product qualities include attributes such as type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other specific features and requirements.
 2. Evidence that proposed product provides specified warranty.
 3. List of similar installations for completed projects with project names and addresses and names and addresses of Engineer and owners, if requested.
 4. Samples, if requested.
- B. Submittal Requirements: Approval by the Engineer of Contractor's request for use of comparable product is not intended to satisfy other submittal requirements. Comply with specified submittal requirements.

PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

SECTION 017300 - EXECUTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes general administrative and procedural requirements governing execution of the Work including, but not limited to, the following:
 - 1. Construction layout.
 - 2. Field engineering and surveying.
 - 3. Installation of the Work.
 - 4. Cutting and patching.
 - 5. Coordination of Owner-installed products.
 - 6. Progress cleaning.
 - 7. Starting and adjusting.
 - 8. Protection of installed construction.
- B. Related Requirements:
 - 1. Section 011000 "Summary" for limits on use of Project site.
 - 2. Section 013300 "Submittal Procedures" for submitting surveys.
 - 3. Section 017700 "Closeout Procedures" for submitting final property survey with Project Record Documents, recording of Owner-accepted deviations from indicated lines and levels, replacing defective work, and final cleaning.
 - 4. Section 024119 "Selective Demolition" for demolition and removal of selected portions of the building.

1.3 DEFINITIONS

- A. Cutting: Removal of in-place construction necessary to permit installation or performance of subsequent work.
- B. Patching: Fitting and repair work required to restore construction to original conditions after installation of subsequent work.

1.4 INFORMATIONAL SUBMITTALS

- A. Landfill Receipts: Submit copy of receipts issued by a landfill facility, licensed to accept hazardous materials, for hazardous waste disposal.

1.5 QUALITY ASSURANCE

- A. Land Surveyor Qualifications: A professional land surveyor who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing land-surveying services of the kind indicated.
- B. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.
 - 1. Structural Elements: When cutting and patching structural elements, notify Engineer of locations and details of cutting and await directions from Engineer before proceeding. Shore, brace, and support structural elements during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection.
 - 2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety. Operational elements include the following:
 - a. Plumbing piping systems.
 - b. Mechanical systems piping and ducts.
 - c. Conveying systems.
 - d. Electrical wiring systems.
 - 3. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in Engineer's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
- C. Manufacturer's Installation Instructions: Obtain and maintain on-site manufacturer's written recommendations and instructions for installation of products and equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. General: Comply with requirements specified in other Sections.
- B. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.

1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to Engineer for the visual and functional performance of in-place materials.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
 1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 2. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
 3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
- B. Written Report: Where a written report listing conditions detrimental to performance of the Work is required by other Sections, include the following:
 1. Description of the Work.
 2. List of detrimental conditions, including substrates.
 3. List of unacceptable installation tolerances.
 4. Recommended corrections.
- C. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- B. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.
- C. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents caused by differing field conditions outside the control of Contractor, submit a request for information to Engineer according to requirements in Section 013100 "Project Management and Coordination."

3.3 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical work plumb and make horizontal work level.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Sequence the Work and allow adequate clearances to accommodate movement of construction items on site and placement in permanent locations.
- F. Tools and Equipment: Where possible, select tools or equipment that minimize production of excessive noise levels.
- G. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other portions of the Work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- H. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Engineer.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- I. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- J. Repair or remove and replace damaged, defective, or nonconforming Work.
 - 1. Comply with Section 017700 "Closeout Procedures" for repairing or removing and replacing defective Work.

3.4 CUTTING AND PATCHING

- A. Cutting and Patching, General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
 - 1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during installation or cutting and patching operations, by methods and with materials so as not to void existing warranties.
- C. Temporary Support: Provide temporary support of work to be cut.
- D. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.
- E. Adjacent Occupied Areas: Where interference with use of adjoining areas or interruption of free passage to adjoining areas is unavoidable, coordinate cutting and patching according to requirements in Section 011000 "Summary."
- F. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to prevent interruption to occupied areas.
- G. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
 - 1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
 - 2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
 - 3. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
 - 4. Excavating and Backfilling: Comply with requirements in applicable Sections where required by cutting and patching operations.
 - 5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
 - 6. Proceed with patching after construction operations requiring cutting are complete.
- H. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other work. Patch with durable seams that are as invisible as practicable. Provide materials and comply with installation requirements specified in other Sections, where applicable.

1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate physical integrity of installation.
2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will minimize evidence of patching and refinishing.
 - a. Clean piping, conduit, and similar features before applying paint or other finishing materials.
 - b. Restore damaged pipe covering to its original condition.
- I. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

3.5 OWNER-INSTALLED PRODUCTS

- A. Site Access: Provide access to Project site for Owner's construction personnel.
- B. Coordination: Coordinate construction and operations of the Work with work performed by Owner's construction personnel.
 1. Construction Schedule: Inform Owner of Contractor's preferred construction schedule for Owner's portion of the Work. Adjust construction schedule based on a mutually agreeable timetable. Notify Owner if changes to schedule are required due to differences in actual construction progress.
 2. Preinstallation Conferences: Include Owner's construction personnel at preinstallation conferences covering portions of the Work that are to receive Owner's work. Attend preinstallation conferences conducted by Owner's construction personnel if portions of the Work depend on Owner's construction.

3.6 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.
 1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F (27 deg C).
 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
 - a. Use containers intended for holding waste materials of type to be stored.
 4. Coordinate progress cleaning for joint-use areas where Contractor and other contractors are working concurrently.
- B. Site: Maintain Project site free of waste materials and debris.

- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
 - 1. Remove liquid spills promptly.
 - 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
- G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways. Comply with waste disposal requirements in Section 017419 "Construction Waste Management and Disposal."
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- I. Limiting Exposures: Supervise construction operations to ensure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.7 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.
- B. Protection of Existing Items: Provide protection and ensure that existing items to remain undisturbed by construction are maintained in condition that existed at commencement of the Work.
- C. Comply with manufacturer's written instructions for temperature and relative humidity.

END OF SECTION 017300

SECTION 017419 - CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for the following:
 - 1. Salvaging nonhazardous demolition and construction waste.
 - 2. Recycling nonhazardous demolition and construction waste.
 - 3. Disposing of nonhazardous demolition and construction waste.

1.3 DEFINITIONS

- A. Construction Waste: Building, structure, and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.
- B. Demolition Waste: Building, structure, and site improvement materials resulting from demolition operations.
- C. Disposal: Removal of demolition or construction waste and subsequent salvage, sale, recycling, or deposit in landfill, incinerator acceptable to authorities having jurisdiction, or designated spoil areas on Owner's property.
- D. Recycle: Recovery of demolition or construction waste for subsequent processing in preparation for reuse.
- E. Salvage: Recovery of demolition or construction waste and subsequent sale or reuse in another facility.
- F. Salvage and Reuse: Recovery of demolition or construction waste and subsequent incorporation into the Work.

1.4 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition and construction waste becomes property of Contractor.

- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.

- 1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.5 QUALITY ASSURANCE

- A. Regulatory Requirements: Comply with transportation and disposal regulations of authorities having jurisdiction.

PART 2 - PRODUCTS

PART 3 - EXECUTION

3.1 PLAN IMPLEMENTATION

- A. Site Access and Temporary Controls: Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
 - 1. Designate and label specific areas on Project site necessary for separating materials that are to be salvaged and recycled.
 - 2. Comply with Section 015000 "Temporary Facilities and Controls" for controlling dust and dirt, environmental protection, and noise control.

3.2 SALVAGING DEMOLITION WASTE

- A. Comply with requirements in Section 024119 "Selective Demolition" for salvaging demolition waste.
- B. Salvaged Items for Reuse in the Work: Salvage items for reuse and handle as follows:
 - 1. Clean salvaged items.
 - 2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
 - 3. Store items in a secure area until installation.
 - 4. Protect items from damage during transport and storage.
 - 5. Install salvaged items to comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make items functional for use indicated.
- C. Salvaged Items for Sale and Donation: Not permitted on Project site.
- D. Salvaged Items for Owner's Use: Salvage items for Owner's use and handle as follows:

1. Clean salvaged items.
2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
3. Store items in a secure area until delivery to Owner.
4. Transport items to Owner's storage area designated by Owner.
5. Protect items from damage during transport and storage.

E. Lighting Fixtures: Separate lamps by type and protect from breakage.

3.3 RECYCLING DEMOLITION AND CONSTRUCTION WASTE, GENERAL

- A. General: Recycle paper and beverage containers used by on-site workers.
- B. Recycling Incentives: Revenues, savings, rebates, tax credits, and other incentives received for recycling waste materials shall accrue to Contractor.
- C. Preparation of Waste: Prepare and maintain recyclable waste materials according to recycling or reuse facility requirements. Maintain materials free of dirt, adhesives, solvents, petroleum contamination, and other substances deleterious to the recycling process.
- D. Procedures: Separate recyclable waste from other waste materials, trash, and debris. Separate recyclable waste by type at Project site to the maximum extent practical according to approved construction waste management plan.
 1. Provide appropriately marked containers or bins for controlling recyclable waste until removed from Project site. Include list of acceptable and unacceptable materials at each container and bin.
 - a. Inspect containers and bins for contamination and remove contaminated materials if found.
 2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
 3. Stockpile materials away from construction area. Store components off the ground and protect from the weather.
 4. Remove recyclable waste from Owner's property and transport to recycling receiver or processor as often as required to prevent overfilling bins.

3.4 RECYCLING DEMOLITION WASTE

- A. Concrete: Remove reinforcement and other metals from concrete and sort with other metals.
- B. Masonry: Remove metal reinforcement, anchors, and ties from masonry and sort with other metals.
 1. Clean and stack undamaged, whole masonry units on wood pallets.

- C. Metals: Separate metals by type.
 - 1. Structural Steel: Stack members according to size, type of member, and length.
 - 2. Remove and dispose of bolts, nuts, washers, and other rough hardware.
- D. Piping: Reduce piping to straight lengths and store by material and size. Separate supports, hangers and other components by material and size.
- E. Conduit: Reduce conduit to straight lengths and store by material and size.
- F. Lamps: Separate lamps by type and store according to requirements in 40 CFR 273.

3.5 RECYCLING CONSTRUCTION WASTE

- A. Packaging:
 - 1. Cardboard and Boxes: Break down packaging into flat sheets. Bundle and store in a dry location.
 - 2. Polystyrene Packaging: Separate and bag materials.
 - 3. Pallets: As much as possible, require deliveries using pallets to remove pallets from Project site. For pallets that remain on-site, break down pallets into component wood pieces and comply with requirements for recycling wood.
 - 4. Crates: Break down crates into component wood pieces and comply with requirements for recycling wood.
- B. Paint: Seal containers and store by type.

3.6 DISPOSAL OF WASTE

- A. General: Except for items or materials to be salvaged or recycled, remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.
 - 1. Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning: Do not burn waste materials.

END OF SECTION 017419

SECTION 017700 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
 - 1. Substantial Completion procedures.
 - 2. Final completion procedures.
 - 3. Warranties.
 - 4. Final cleaning.
 - 5. Repair of the Work.
- B. Related Requirements:
 - 1. Section 017823 "Operation and Maintenance Data" for additional operation and maintenance manual requirements.
 - 2. Section 017839 "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of cleaning agent.
- B. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.
- C. Certified List of Incomplete Items: Final submittal at final completion.

1.4 CLOSEOUT SUBMITTALS

- A. Certificates of Release: From authorities having jurisdiction.
- B. Certificate of Insurance: For continuing coverage.
- C. Field Report: For pest control inspection.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Schedule of Maintenance Material Items: For maintenance material submittal items specified in other Sections.

1.6 SUBSTANTIAL COMPLETION PROCEDURES

- A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected (Contractor's punch list), indicating the value of each item on the list and reasons why the Work is incomplete.
- B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
 - 1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 - 2. Submit closeout submittals specified in other Division 01 Sections, including project record documents, operation and maintenance manuals, damage or settlement surveys, property surveys, and similar final record information.
 - 3. Submit closeout submittals specified in individual Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 - 4. Submit maintenance material submittals specified in individual Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Engineer. Label with manufacturer's name and model number.
- C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
 - 1. Advise Owner of pending insurance changeover requirements.
 - 2. Advise Owner's personnel of changeover in security provisions.
 - 3. Perform preventive maintenance on equipment used prior to Substantial Completion.
 - 4. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
 - 5. Complete final cleaning requirements.
 - 6. Touch up paint and otherwise repair and restore marred exposed finishes to eliminate visual defects.
- D. Inspection: Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Engineer will either proceed with inspection or notify Contractor of unfulfilled requirements. Engineer will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Engineer, that must be completed or corrected before certificate will be issued.

1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for final completion.

1.7 FINAL COMPLETION PROCEDURES

- A. Submittals Prior to Final Completion: Before requesting final inspection for determining final completion, complete the following:
1. Submit a final Application for Payment according to Section 012900 "Payment Procedures."
 2. Certified List of Incomplete Items: Submit certified copy of Engineer's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Engineer. Certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
 3. Certificate of Insurance: Submit evidence of final, continuing insurance coverage complying with insurance requirements.
 4. Submit final completion photographic documentation.
- B. Inspection: Submit a written request for final inspection to determine acceptance a minimum of 10 days prior to date the work will be completed and ready for final inspection and tests. On receipt of request, Engineer will either proceed with inspection or notify Contractor of unfulfilled requirements. Engineer will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.
1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

1.8 LIST OF INCOMPLETE ITEMS (PUNCH LIST)

- A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.
1. Include the following information at the top of each page:
 - a. Project name.
 - b. Date.
 - c. Name of Engineer.
 - d. Name of Contractor.
 - e. Page number.
 2. Submit list of incomplete items in the following format:
 - a. MS Excel electronic file. Engineer will return annotated file.

1.9 SUBMITTAL OF PROJECT WARRANTIES

- A. Time of Submittal: Submit written warranties on request of Engineer for designated portions of the Work where warranties are indicated to commence on dates other than date of Substantial Completion, or when delay in submittal of warranties might limit Owner's rights under warranty.
- B. Organize warranty documents into an orderly sequence based on the table of contents of Project Manual.
- C. Warranty Electronic File: Provide warranties and bonds in PDF format. Assemble complete warranty and bond submittal package into a single electronic PDF file with bookmarks enabling navigation to each item. Provide bookmarked table of contents at beginning of document.
 - 1. Submit by email to Engineer.
- D. Warranties in Paper Form:
 - 1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch (215-by-280-mm) paper.
 - 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 - 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
- E. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.

- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Comply with manufacturer's written instructions.
1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - d. Remove snow and ice to provide safe access to building.
 - e. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - f. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - g. Sweep concrete floors broom clean in unoccupied spaces.
 - h. Remove labels that are not permanent.
 - i. Wipe surfaces of mechanical and electrical equipment, elevator equipment, and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - j. Clean luminaires, lamps, globes, and reflectors to function with full efficiency.
 - k. Leave Project clean and ready for occupancy.
- C. Pest Control: Comply with pest control requirements in Section 015000 "Temporary Facilities and Controls." Prepare written report.
- D. Construction Waste Disposal: Comply with waste disposal requirements in Section 017419 "Construction Waste Management and Disposal."

3.2 REPAIR OF THE WORK

- A. Complete repair and restoration operations before requesting inspection for determination of Substantial Completion.
- B. Repair, or remove and replace, defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.

1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that already show evidence of repair or restoration.
 - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.
3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

END OF SECTION 017700

SECTION 017823 - OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for preparing operation and maintenance manuals, including the following:
 - 1. Operation and maintenance documentation directory manuals.
 - 2. Emergency manuals.
 - 3. Systems and equipment operation manuals.
 - 4. Systems and equipment maintenance manuals.
 - 5. Product maintenance manuals.
- B. Related Requirements:
 - 1. Section 013300 "Submittal Procedures" for submitting copies of submittals for operation and maintenance manuals.

1.3 DEFINITIONS

- A. System: An organized collection of parts, equipment, or subsystems united by regular interaction.
- B. Subsystem: A portion of a system with characteristics similar to a system.

1.4 CLOSEOUT SUBMITTALS

- A. Submit operation and maintenance manuals indicated. Provide content for each manual as specified in individual Specification Sections, and as reviewed and approved at the time of Section submittals. Submit reviewed manual content formatted and organized as required by this Section.
 - 1. Engineer will comment on whether content of operation and maintenance submittals is acceptable.
 - 2. Where applicable, clarify and update reviewed manual content to correspond to revisions and field conditions.

- B. Format: Submit operation and maintenance manuals in the following format:
 - 1. Submit by email to Engineer. Enable reviewer comments on draft submittals.
- C. Initial Manual Submittal: Submit draft copy of each manual at least 30 days before commencing demonstration and training. Engineer will comment on whether general scope and content of manual are acceptable.
- D. Final Manual Submittal: Submit each manual in final form prior to requesting inspection for Substantial Completion and at least 15 days before commencing demonstration and training. Engineer will return copy with comments.
 - 1. Correct or revise each manual to comply with Engineer's comments. Submit copies of each corrected manual within 15 days of receipt of Engineer's comments and prior to commencing demonstration and training.
- E. Comply with Section 017700 "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

1.5 FORMAT OF OPERATION AND MAINTENANCE MANUALS

- A. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.
 - 1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
 - 2. File Names and Bookmarks: Bookmark individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.

1.6 REQUIREMENTS FOR MAINTENANCE MANUALS

- A. Organization of Manuals: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:
 - 1. Title page.
 - 2. Table of contents.
 - 3. Manual contents.
- B. Title Page: Include the following information:
 - 1. Subject matter included in manual.
 - 2. Name and address of Project.

3. Name and address of Owner.
 4. Date of submittal.
 5. Name and contact information for Contractor.
 6. Name and contact information for Engineer.
 7. Cross-reference to related systems in other operation and maintenance manuals.
- C. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.
- D. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.
- E. Identification: In the documentation directory and in each operation and maintenance manual, identify each system, subsystem, and piece of equipment with same designation used in the Contract Documents. If no designation exists, assign a designation according to ASHRAE Guideline 4, "Preparation of Operating and Maintenance Documentation for Building Systems."

1.7 PRODUCT MAINTENANCE MANUALS

- A. Product Maintenance Manual: Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.
- B. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair materials and sources, and warranties and bonds, as described below.
- C. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.
- D. Product Information: Include the following, as applicable:
1. Product name and model number.
 2. Manufacturer's name.
 3. Color, pattern, and texture.
 4. Material and chemical composition.
 5. Reordering information for specially manufactured products.
- E. Maintenance Procedures: Include manufacturer's written recommendations and the following:
1. Inspection procedures.
 2. Types of cleaning agents to be used and methods of cleaning.
 3. List of cleaning agents and methods of cleaning detrimental to product.

4. Schedule for routine cleaning and maintenance.
 5. Repair instructions.
- F. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.
- G. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
1. Include procedures to follow and required notifications for warranty claims.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017823

SECTION 017839 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for project record documents, including the following:
 - 1. Record Drawings.
 - 2. Record Specifications.
 - 3. Record Product Data.
 - 4. Miscellaneous record submittals.
- B. Related Requirements:
 - 1. Section 017300 "Execution" for final property survey.
 - 2. Section 017700 "Closeout Procedures" for general closeout procedures.
 - 3. Section 017823 "Operation and Maintenance Data" for operation and maintenance manual requirements.

1.3 CLOSEOUT SUBMITTALS

- A. Record Drawings: Comply with the following:
 - 1. Number of Copies: Submit one set(s) of marked-up record prints.
 - 2. Number of Copies: Submit copies of record Drawings as follows:
 - a. Initial Submittal:
 - 1) Submit one paper-copy set(s) of marked-up record prints.
 - 2) Submit PDF electronic files of scanned record prints and one of file prints.
 - 3) Submit record digital data files and one set(s) of plots.
 - 4) Engineer will indicate whether general scope of changes, additional information recorded, and quality of drafting are acceptable.
 - b. Final Submittal:
 - 1) Submit PDF electronic files of scanned record prints and one set(s) of prints.
 - 2) Print each drawing, whether or not changes and additional information were recorded.

- B. Record Specifications: Submit one paper copy of Project's Specifications, including addenda and contract modifications.
- C. Record Product Data: Submit one paper copy of each submittal.
 - 1. Where record Product Data are required as part of operation and maintenance manuals, submit duplicate marked-up Product Data as a component of manual.
- D. Miscellaneous Record Submittals: See other Specification Sections for miscellaneous record-keeping requirements and submittals in connection with various construction activities. Submit one paper copy of each submittal.
- E. Reports: Submit written report weekly indicating items incorporated into project record documents concurrent with progress of the Work, including revisions, concealed conditions, field changes, product selections, and other notations incorporated.

1.4 RECORD DRAWINGS

- A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised drawings as modifications are issued.
 - 1. Preparation: Mark record prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an acceptable drawing technique.
 - c. Record data as soon as possible after obtaining it.
 - d. Record and check the markup before enclosing concealed installations.
 - e. Cross-reference record prints to corresponding photographic documentation.
 - 2. Content: Types of items requiring marking include, but are not limited to, the following:
 - a. Dimensional changes to Drawings.
 - b. Revisions to details shown on Drawings.
 - c. Depths of foundations.
 - d. Locations and depths of underground utilities.
 - e. Revisions to routing of piping and conduits.
 - f. Revisions to electrical circuitry.
 - g. Actual equipment locations.
 - h. Duct size and routing.
 - i. Locations of concealed internal utilities.
 - j. Changes made by Change Order or Work Change Directive.
 - k. Changes made following Engineer's written orders.
 - l. Details not on the original Contract Drawings.
 - m. Field records for variable and concealed conditions.
 - n. Record information on the Work that is shown only schematically.

3. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
 4. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
 5. Mark important additional information that was either shown schematically or omitted from original Drawings.
 6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.
- B. Record Digital Data Files: Immediately before inspection for Certificate of Substantial Completion, review marked-up record prints with Engineer. When authorized, prepare a full set of corrected digital data files of the Contract Drawings, as follows:
1. Format: Annotated PDF electronic file.
 2. Incorporate changes and additional information previously marked on record prints. Delete, redraw, and add details and notations where applicable.
 3. Refer instances of uncertainty to Engineer for resolution.
 4. Engineer will furnish Contractor with one set of digital data files of the Contract Drawings for use in recording information.
 - a. See Section 013100 "Project Management and Coordination" for requirements related to use of Engineer's digital data files.
 - b. Engineer will provide data file layer information. Record markups in separate layers.
- C. Format: Identify and date each record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
1. Record Prints: Organize record prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
 2. Format: Annotated PDF electronic file.
 3. Record Digital Data Files: Organize digital data information into separate electronic files that correspond to each sheet of the Contract Drawings. Name each file with the sheet identification. Include identification in each digital data file.
 4. Identification: As follows:
 - a. Project name.
 - b. Date.
 - c. Designation "PROJECT RECORD DRAWINGS."
 - d. Name of Engineer.
 - e. Name of Contractor.

1.5 RECORD SPECIFICATIONS

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.

1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made.
4. For each principal product, indicate whether record Product Data has been submitted in operation and maintenance manuals instead of submitted as record Product Data.
5. Note related Change Orders, record Product Data, and record Drawings where applicable.

B. Format: Submit record Specifications as annotated PDF electronic file.

1.6 RECORD PRODUCT DATA

A. Recording: Maintain one copy of each submittal during the construction period for project record document purposes. Post changes and revisions to project record documents as they occur; do not wait until end of Project.

B. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.

1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
3. Note related Change Orders, record Specifications, and record Drawings where applicable.

C. Format: Submit record Product Data as annotated PDF electronic file.

1. Include record Product Data directory organized by Specification Section number and title, electronically linked to each item of record Product Data.

1.7 MISCELLANEOUS RECORD SUBMITTALS

A. Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.

B. Format: Submit miscellaneous record submittals as PDF electronic file.

1. Include miscellaneous record submittals directory organized by Specification Section number and title, electronically linked to each item of miscellaneous record submittals.

1.8 MAINTENANCE OF RECORD DOCUMENTS

- A. Maintenance of Record Documents: Store record documents in the field office apart from the Contract Documents used for construction. Do not use project record documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to project record documents for Engineer's reference during normal working hours.

PART 2 - PRODUCTS

PART 3 - EXECUTION

END OF SECTION 017839

SECTION 024119 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Demolition and removal of selected portions of building or structure.
 - 2. Demolition and removal of selected site elements.
 - 3. Salvage of existing items to be reused or recycled.

- B. Related Requirements:

- 1. Section 011000 "Summary" for restrictions on use of the premises, Owner-occupancy requirements, and phasing requirements.
 - 2. Section 017300 "Execution" for cutting and patching procedures.

1.3 DEFINITIONS

- A. Remove: Detach items from existing construction and dispose of them off-site unless indicated to be salvaged or reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and store.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage, prepare for reuse, and reinstall where indicated.
- D. Existing to Remain: Leave existing items that are not to be removed and that are not otherwise indicated to be salvaged or reinstalled.

1.4 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.
- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.
 - 1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.5 INFORMATIONAL SUBMITTALS

- A. Schedule of Selective Demolition Activities: Indicate the following:
 - 1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity.
 - 2. Interruption of utility services. Indicate how long utility services will be interrupted.
 - 3. Coordination for shutoff, capping, and continuation of utility services.
 - 4. Use of elevator and stairs.
 - 5. Coordination of Owner's continuing occupancy of portions of existing.
- B. Predemolition Photographs or Video: Show existing conditions of adjoining construction, including finish surfaces, that might be misconstrued as damage caused by demolition operations. Submit before Work begins.
- C. Warranties: Documentation indicating that existing warranties are still in effect after completion of selective demolition.

1.6 CLOSEOUT SUBMITTALS

- A. Inventory: Submit a list of items that have been removed and salvaged.

1.7 FIELD CONDITIONS

- A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
- B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
- C. Notify Engineer of discrepancies between existing conditions and Drawings before proceeding with selective demolition.
- D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
 - 1. If suspected hazardous materials are encountered, do not disturb; immediately notify Engineer and Owner. Hazardous materials will be removed by Owner under a separate contract.
- E. Storage or sale of removed items or materials on-site is not permitted.
- F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.

1.8 COORDINATION

- A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- B. Standards: Comply with ASSE A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- B. Perform an engineering survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective building demolition operations.
 - 1. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.
- C. Verify that any identified hazardous materials have been remediated before proceeding with building demolition operations.
- D. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video.
 - 1. Inventory and record the condition of items to be removed and salvaged. Provide photographs or video of conditions that might be misconstrued as damage caused by salvage operations.

3.2 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- A. Existing Services/Systems to Remain: Maintain services/systems indicated to remain and protect them against damage.

3.3 PROTECTION

- A. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 - 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 - 2. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls."
- B. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 - 1. Strengthen or add new supports when required during progress of selective demolition.
- C. Remove temporary barricades and protections where hazards no longer exist.

3.4 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
 - 1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 - 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.
 - 3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
 - 4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
 - 5. Maintain fire watch during and for at least 4 hours after flame-cutting operations.
 - 6. Maintain adequate ventilation when using cutting torches.
 - 7. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 - 8. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
 - 9. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 - 10. Dispose of demolished items and materials promptly. Comply with requirements in Section 017419 "Construction Waste Management and Disposal."

- B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
- C. Removed and Salvaged Items:
 - 1. Clean salvaged items.
 - 2. Pack or crate items after cleaning. Identify contents of containers.
 - 3. Store items in a secure area until delivery to Owner.
 - 4. Transport items to Owner's storage area designated by Owner.
 - 5. Protect items from damage during transport and storage.
- D. Removed and Reinstalled Items:
 - 1. Clean and repair items to functional condition adequate for intended reuse.
 - 2. Pack or crate items after cleaning and repairing. Identify contents of containers.
 - 3. Protect items from damage during transport and storage.
 - 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.
- E. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Engineer, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.5 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

- A. Concrete: Demolish in small sections. Using power-driven saw, cut concrete to a depth of at least 3/4 inch (19 mm) at junctures with construction to remain. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete. Neatly trim openings to dimensions indicated.
- B. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, and then remove masonry between saw cuts.
- C. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site and recycle or dispose of them according to Section 017419 "Construction Waste Management and Disposal."
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.

3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
4. Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."

B. Burning: Do not burn demolished materials.

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

SECTION 033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cast-in-place concrete, including concrete materials, mixture design, placement procedures, and finishes.

1.2 DEFINITIONS

- A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash, slag cement, and other pozzolans materials subject to compliance with requirements.
- B. Water/Cement Ratio (w/cm): The ratio by weight of water to cementitious materials.

1.3 PREINSTALLATION MEETINGS

1.4 ACTION SUBMITTALS

A. Product Data: For each of the following.

1. Portland cement.
2. Fly ash.
3. Slag cement.
4. Blended hydraulic cement.
5. Aggregates.
6. Admixtures:
 - a. Include limitations of use, including restrictions on cementitious materials, supplementary cementitious materials, air entrainment, aggregates, temperature at time of concrete placement, relative humidity at time of concrete placement, curing conditions, and use of other admixtures.
7. Curing materials.
8. Joint fillers.

B. Design Mixtures: For each concrete mixture, include the following:

1. Mixture identification.
2. Minimum 28-day compressive strength.
3. Durability exposure class.

4. Maximum w/cm.
5. Calculated equilibrium unit weight, for lightweight concrete.
6. Slump limit.
7. Air content.
8. Nominal maximum aggregate size.
9. Indicate amounts of mixing water to be withheld for later addition at Project site if permitted.
10. Intended placement method.
11. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.

1.5 INFORMATIONAL SUBMITTALS

A. Material Certificates: For each of the following, signed by manufacturers:

1. Cementitious materials.
2. Admixtures.
3. Curing compounds.
4. Joint-filler strips.

B. Material Test Reports: For the following, from a qualified testing agency:

1. Portland cement.
2. Fly ash.
3. Slag cement.
4. Blended hydraulic cement.
5. Aggregates.
6. Admixtures:

C. Research Reports: For concrete admixtures in accordance with ICC's Acceptance Criteria AC198.

D. Preconstruction Test Reports: For each mix design.

1.6 QUALITY ASSURANCE

A. Ready-Mixed Concrete Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C94/C94M requirements for production facilities and equipment.

1. Manufacturer certified in accordance with NRMCA's "Certification of Ready Mixed Concrete Production Facilities."

1.7 PRECONSTRUCTION TESTING

- A. Preconstruction Testing Service: Engage a qualified testing agency to perform preconstruction testing on each concrete mixture.
 - 1. Include the following information in each test report:
 - a. Admixture dosage rates.
 - b. Slump.
 - c. Air content.
 - d. Seven-day compressive strength.
 - e. 28-day compressive strength.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Comply with ASTM C94/C94M and **ACI 301**.

1.9 FIELD CONDITIONS

- A. Cold-Weather Placement: Comply with **ACI 301** and ACI 306.1.
- B. Hot-Weather Placement: Comply with **ACI 301** and **ACI 305.1**.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

- A. ACI Publications: Comply with **ACI 301** unless modified by requirements in the Contract Documents.

2.2 CONCRETE MATERIALS

- A. Cementitious Materials:
 - 1. Portland Cement: ASTM C150/C150M, Type I/II.
 - 2. Fly Ash: ASTM C618, Class C or F.
 - 3. Slag Cement: ASTM C989/C989M, Grade 100 or 120.
- B. Normal-Weight Aggregates: ASTM C33/C33M, Class 3S] coarse aggregate or better, graded. Provide aggregates from a single source.
 - 1. Alkali-Silica Reaction: Comply with one of the following:
 - a. Expansion Result of Aggregate: Not more than 0.04 percent at one-year when tested in accordance with ASTM C1293.

- b. Expansion Results of Aggregate and Cementitious Materials in Combination: Not more than 0.10 percent at an age of 16 days when tested in accordance with ASTM C1567.
 - c. Alkali Content in Concrete: Not more than 4 lb./cu. yd. (2.37 kg/cu. m) for moderately reactive aggregate or 3 lb./cu. yd. (1.78 kg/cu. m) for highly reactive aggregate, when tested in accordance with ASTM C1293 and categorized in accordance with ASTM C1778, based on alkali content being calculated in accordance with ACI 301 (ACI 301M).
- 2. Maximum Coarse-Aggregate Size: 1-1/2 inches nominal.
 - 3. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.
- C. Air-Entraining Admixture: ASTM C260/C260M.
- D. Chemical Admixtures: Certified by manufacturer to be compatible with other admixtures that do not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.
- 1. Water-Reducing Admixture: ASTM C494/C494M, Type A.
 - 2. Retarding Admixture: ASTM C494/C494M, Type B.
 - 3. Water-Reducing and -Retarding Admixture: ASTM C494/C494M, Type D.
 - 4. High-Range, Water-Reducing Admixture: ASTM C494/C494M, Type F.
 - 5. High-Range, Water-Reducing and -Retarding Admixture: ASTM C494/C494M, Type G.
 - 6. Plasticizing and Retarding Admixture: ASTM C1017/C1017M, Type II.
- E. Water and Water Used to Make Ice: ASTM C94/C94M, potable .
- 1.

2.3 CURING MATERIALS

- A. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. (305 g/sq. m) when dry.
- B. Moisture-Retaining Cover: ASTM C171, polyethylene film burlap-polyethylene sheet.
- 1. Color:
 - a. Ambient Temperature Below 50 deg F (10 deg C): Black.
 - b. Ambient Temperature between 50 deg F (10 deg C) and 85 deg F (29 deg C): Any color.
 - c. Ambient Temperature Above 85 deg F (29 deg C): White.

- C. Water: Potable or complying with ASTM C1602/C1602M.

2.4 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D1751, asphalt-saturated cellulosic fiber.

2.5 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, in accordance with **ACI 301 (ACI 301M)**.
 - 1. Use a qualified testing agency for preparing and reporting proposed mixture designs, based on laboratory trial mixtures.
- B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:
 - 1. Fly Ash or Other Pozzolans: 25 percent by mass.
 - 2. Slag Cement: 50 percent by mass.
 - 3. Total of Fly Ash or Other Pozzolans, Slag Cement: 50 percent by mass, with fly ash or pozzolans not exceeding 25 percent by mass.
 - 4. Total of Fly Ash or Other Pozzolans: 35 percent by mass with fly ash or pozzolans not exceeding 25 percent by mass.
- C. Admixtures: Use admixtures in accordance with manufacturer's written instructions.

2.6 CONCRETE MIXTURES

- A. Class A: Normal-weight concrete used for exterior slabs.
 - 1. Exposure Class: **ACI 318 F3 S0W0 C2**.
 - 2. Minimum Compressive Strength: **5000 psi** at 28 days.
 - 3. Maximum w/cm: **0.40**.
 - 4. Slump Limit: **4 inches (100 mm), plus or minus 1 inch (25 mm) or 8 inches (200 mm), plus or minus 1 inch (25 mm) for concrete with verified slump of 3 inches (75 mm) plus or minus 1 inch (25 mm) before adding high-range water-reducing admixture or plasticizing admixture at Project site.**
 - 5. Air Content:
 - a. Exposure Classes F2 and F3: **5.5 percent, plus or minus 1.5 percent at point of delivery for concrete containing 1-1/2-inch (38-mm) nominal maximum aggregate size.** Except concrete that is to be trowel finished which shall have a maximum air content of 3.0 percent.
 - 6. Limit water-soluble, chloride-ion content in hardened concrete to **0.15** percent by weight of cement.

2.7 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete in accordance with ASTM C94/C94M, and furnish batch ticket information.

PART 3 - EXECUTION

3.1 INSTALLATION OF EMBEDDED ITEMS

- A. Place and secure anchorage devices and other embedded items required for adjoining Work that is attached to or supported by cast-in-place concrete.
 - 1. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 2. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of ANSI/AISC 303.

3.2 JOINTS

- A. Construct joints true to line, with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Coordinate with floor slab pattern and concrete placement sequence.
 - 1. Install so strength and appearance of concrete are not impaired, at locations indicated on Drawings.
 - 2. Place joints perpendicular to main reinforcement.
 - a. Continue reinforcement across construction joints unless otherwise indicated.
 - b. Do not continue reinforcement through sides of strip placements of floors and slabs.
- C. Control Joints in Slabs-on-Ground: Form weakened-plane control joints, sectioning concrete into areas as indicated. Construct control joints for a depth equal to at least one-fourth of concrete thickness as follows:
 - 1. Sawed Joints: Form control joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut **1/8-inch- (3.2-mm-)** wide joints into concrete when cutting action does not tear, abrade, or otherwise damage surface and before concrete develops random cracks.
- D. Isolation Joints in Slabs-on-Ground: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.
 - 1. Terminate full-width joint-filler strips not less than **1/2 inch (13 mm)** or more than **1 inch (25 mm)** below finished concrete surface, where joint sealants, specified in Section 079200 "Joint Sealants," are indicated.
 - 2. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.
- E. Doweled Joints:
 - 1. Install dowel bars and support assemblies at joints where indicated on Drawings.

2. Lubricate or asphalt coat one-half of dowel bar length to prevent concrete bonding to one side of joint.

3.3 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections are completed.
- B. Notify testing and inspection agencies 24 hours prior to commencement of concrete placement.
- C. Do not add water to concrete during delivery, at Project site, or during placement unless approved by Engineer in writing, but not to exceed the amount indicated on the concrete delivery ticket.
 1. Do not add water to concrete after adding high-range water-reducing admixtures to mixture.
- D. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete is placed on concrete that has hardened enough to cause seams or planes of weakness.
 1. If a section cannot be placed continuously, provide construction joints as indicated.
 2. Deposit concrete to avoid segregation.
 3. Deposit concrete in horizontal layers of depth not to exceed formwork design pressures and in a manner to avoid inclined construction joints.
 4. Consolidate placed concrete with mechanical vibrating equipment in accordance with **ACI 301** (**ACI 301M**).
 - a. Do not use vibrators to transport concrete inside forms.
 - b. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least **6 inches** (**150 mm**) into preceding layer.
 - c. Do not insert vibrators into lower layers of concrete that have begun to lose plasticity.
 - d. At each insertion, limit duration of vibration to time necessary to consolidate concrete, and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.
- E. Deposit and consolidate concrete for slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.
 1. Do not place concrete slabs in a checkerboard sequence.
 2. Consolidate concrete during placement operations, so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
 3. Maintain reinforcement in position on chairs during concrete placement.
 4. Screed slab surfaces with a straightedge and strike off to correct elevations.
 5. Level concrete, cut high areas, and fill low areas.
 6. Slope surfaces uniformly to drains where required.
 7. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface.

8. Do not further disturb slab surfaces before starting finishing operations.

3.4 FINISHING FLOORS AND SLABS

- A. Comply with ACI 302.1R recommendations for screeding, restraighening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
- B. Broom Finish: Apply a broom finish to exterior concrete slabs, steps, ramps, and other locations indicated on Drawings.
 1. Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route.
 2. Coordinate required final finish with Engineer before application.

3.5 INSTALLATION OF MISCELLANEOUS CONCRETE ITEMS

- A. Filling In:
 1. Fill in holes and openings left in concrete structures after Work of other trades is in place unless otherwise indicated.
 2. Mix, place, and cure concrete, as specified, to blend with in-place construction.
 3. Provide other miscellaneous concrete filling indicated or required to complete the Work.
- B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and by steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.

3.6 CONCRETE CURING

- A. Protect freshly placed concrete from premature drying and excessive cold or hot temperatures.
 1. Comply with **ACI 301 (ACI 301M)** and ACI 306.1 for cold weather protection during curing.
 2. Comply with **ACI 301 (ACI 301M)** and **ACI 305.1 (ACI 305.1M)** for hot-weather protection during curing.
 3. Maintain moisture loss no more than **0.2 lb/sq. ft. x h (1 kg/sq. m x h)**, calculated in accordance with ACI 305.1, before and during finishing operations.
- B. Curing Formed Surfaces: Comply with **ACI 308.1 (ACI 308.1M)** as follows:
 1. Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces.
 2. If forms remain during curing period, moist cure after loosening forms.
 3. If removing forms before end of curing period, continue curing for remainder of curing period, as follows:

- a. Continuous Fogging: Maintain standing water on concrete surface until final setting of concrete.
 - b. Continuous Sprinkling: Maintain concrete surface continuously wet.
 - c. Absorptive Cover: Pre-dampen absorptive material before application; apply additional water to absorptive material to maintain concrete surface continuously wet.
 - d. Water-Retention Sheeting Materials: Cover exposed concrete surfaces with sheeting material, taping, or lapping seams.
- C. Curing Unformed Surfaces: Comply with **ACI 308.1** (**ACI 308.1M**) as follows:
1. Begin curing immediately after finishing concrete.

3.7 TOLERANCES

- A. Conform to **ACI 117** (**ACI 117M**).

3.8 FIELD QUALITY CONTROL

- A. Special Inspections: Owner will engage a special inspector to perform field tests and inspections and prepare testing and inspection reports.
- B. Testing Agency: Owner will engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.
1. Testing agency shall be responsible for providing curing container for composite samples on Site and verifying that field-cured composite samples are cured in accordance with ASTM C31/C31M.
 2. Testing agency shall immediately report to Engineer, Contractor, and concrete manufacturer any failure of Work to comply with Contract Documents.
 3. Testing agency shall report results of tests and inspections, in writing, to Owner, Engineer, Contractor, and concrete manufacturer within 48 hours of inspections and tests.
 - a. Test reports shall include reporting requirements of ASTM C31/C31M, ASTM C39/C39M, and ACI 301, including the following as applicable to each test and inspection:
 - 1) Project name.
 - 2) Name of testing agency.
 - 3) Names and certification numbers of field and laboratory technicians performing inspections and testing.
 - 4) Name of concrete manufacturer.
 - 5) Date and time of inspection, sampling, and field testing.
 - 6) Date and time of concrete placement.
 - 7) Location in Work of concrete represented by samples.
 - 8) Date and time sample was obtained.
 - 9) Truck and batch ticket numbers.

- 10) Design compressive strength at 28 days.
 - 11) Concrete mixture designation, proportions, and materials.
 - 12) Field test results.
 - 13) Information on storage and curing of samples before testing, including curing method and maximum and minimum temperatures during initial curing period.
 - 14) Type of fracture and compressive break strengths at seven days and 28 days.
- C. Batch Tickets: For each load delivered, submit three copies of batch delivery ticket to testing agency, indicating quantity, mix identification, admixtures, design strength, aggregate size, design air content, design slump at time of batching, and amount of water that can be added at Project site.
- D. Inspections:
1. Headed bolts and studs.
 2. Verification of use of required design mixture.
 3. Concrete placement, including conveying and depositing.
 4. Curing procedures and maintenance of curing temperature.
 5. Verification of concrete strength before removal of shores and forms from beams and slabs.
 6. Batch Plant Inspections: On a random basis, as determined by Architect.
- E. Concrete Tests: Testing of composite samples of fresh concrete obtained in accordance with ASTM C 172/C 172M shall be performed in accordance with the following requirements:
1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture exceeding 5 cu. yd. (4 cu. m), but less than 25 cu. yd. (19 cu. m), plus one set for each additional 50 cu. yd. (38 cu. m) or fraction thereof.
 - a. When frequency of testing provides fewer than five compressive-strength tests for each concrete mixture, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
 2. Slump: ASTM C143/C143M:
 - a. One test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - b. Perform additional tests when concrete consistency appears to change.
 3. Air Content: ASTM C231/C231M pressure method, for normal-weight concrete.
 - a. One test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 4. Concrete Temperature: ASTM C1064/C1064M:
 - a. One test hourly when air temperature is 40 deg F (4.4 deg C) and below or 80 deg F (27 deg C) and above, and one test for each composite sample.

5. Compression Test Specimens: ASTM C31/C31M:
 - a. Cast and laboratory cure two sets of **three 6-inch (150 mm) by 12-inch (300 mm)** or **4-inch (100 mm) by 8-inch (200 mm)** cylinder specimens for each composite sample.
6. Compressive-Strength Tests: ASTM C39/C39M.
 - a. Test one set of **three** laboratory-cured specimens at seven days and one set of two specimens at 28 days.
 - b. Test one set of **three** field-cured specimens at seven days and one set of two specimens at 28 days.
 - c. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.
7. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.
8. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength, and no compressive-strength test value falls below specified compressive strength by more than **500 psi (3.4 MPa)** if specified compressive strength is **5000 psi (34.5 MPa)**, or no compressive strength test value is less than 10 percent of specified compressive strength if specified compressive strength is greater than **5000 psi (34.5 MPa)**.
9. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
10. Additional Tests:
 - a. Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect.
 - b. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C42/C42M or by other methods as directed by Architect.
 - 1) Acceptance criteria for concrete strength shall be in accordance with **ACI 301 (ACI 301M)**, section 1.6.6.3.
11. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
12. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

3.9 PROTECTION

- A. Protect concrete surfaces as follows:

1. Protect from petroleum stains.
2. Diaper hydraulic equipment used over concrete surfaces.
3. Prohibit vehicles from interior concrete slabs.
4. Prohibit use of pipe-cutting machinery over concrete surfaces.
5. Prohibit placement of steel items on concrete surfaces.
6. Prohibit use of acids or acidic detergents over concrete surfaces.

END OF SECTION 033000

SECTION 071900 - WATER REPELLENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes penetrating water-repellent treatments for the following vertical and horizontal surfaces:
 - 1. Cast-in-place concrete.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include manufacturer's printed statement of VOC content.
 - 2. Include manufacturer's recommended number of coats for each type of substrate and spreading rate for each separate coat.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Applicator.
- B. Product Certificates: For each type of water repellent.
- C. Field quality-control reports.
- D. Sample Warranty: For special warranty.

1.5 QUALITY ASSURANCE

- A. Applicator Qualifications: An employer of workers trained and approved by manufacturer.

1.6 FIELD CONDITIONS

- A. Limitations: Proceed with application only when the following existing and forecasted weather and substrate conditions permit water repellents to be applied according to manufacturers' written instructions and warranty requirements:
1. Concrete surfaces and mortar have cured for not less than 28 days.
 2. Ambient temperature is above 40 deg F (4.4 deg C) and below 100 deg F (37.8 deg C) and will remain so for 24 hours.
 3. Substrate is not frozen and substrate-surface temperature is above 40 deg F (4.4 deg C) and below 100 deg F (37.8 deg C).
 4. Rain or snow is not predicted within 24 hours.
 5. Not less than 24 hours have passed since surfaces were last wet.
 6. Windy conditions do not exist that might cause water repellent to be blown onto vegetation or surfaces not intended to be treated.

PART 2 - PRODUCTS

2.1 PENETRATING WATER REPELLENTS

- A. Silane/Siloxane-Blend, Penetrating Water Repellent with Corrosion Inhibitor: Silane and siloxane blend with 600 g/L or less of VOCs.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Applicator present, for compliance with requirements and conditions affecting performance of the Work.
1. Verify that surfaces are clean and dry according to water-repellent manufacturer's requirements.
 2. Verify that there is no efflorescence or other removable residues that would be trapped beneath the application of water repellent.
 3. Verify that required repairs are complete, cured, and dry before applying water repellent.
- B. Test pH level according to water-repellent manufacturer's written instructions to ensure chemical bond to silica-containing or siliceous minerals.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. New Construction and Repairs: Allow concrete and other cementitious materials to age before application of water repellent, according to repellent manufacturer's written instructions.
- B. Cleaning: Before application of water repellent, clean substrate of substances that could impair penetration or performance of product according to water-repellent manufacturer's written instructions
- C. Protect adjoining work, including mortar and sealant bond surfaces, from spillage or blow-over of water repellent. Cover adjoining and nearby surfaces of aluminum and glass if there is the possibility of water repellent being deposited on surfaces. Cover live vegetation.
- D. Coordination with Sealant Joints: Do not apply water repellent until sealants for joints adjacent to surfaces receiving water-repellent treatment have been installed and cured.
 - 1. Water-repellent work may precede sealant application only if sealant adhesion and compatibility have been tested and verified using substrate, water repellent, and sealant materials identical to those required.

3.3 APPLICATION

- A. Apply coating of water repellent on surfaces to be treated using flooding, brushing, or spraying to the point of saturation. Apply coating in dual passes of uniform, overlapping strokes. Remove excess material; do not allow material to puddle beyond saturation. Comply with manufacturer's written instructions for application procedure unless otherwise indicated.
- B. Apply a second saturation coating, repeating first application. Comply with manufacturer's written instructions for limitations on drying time between coats and after rainstorm wetting of surfaces between coats. Consult manufacturer's technical representative if written instructions are not applicable to Project conditions.

3.4 FIELD QUALITY CONTROL

- A. Testing of Water-Repellent Material: Owner reserves the right to invoke the following procedure at any time and as often as Owner deems necessary during the period when water repellent is being applied:
 - 1. Owner will engage the services of a qualified testing agency to sample water-repellent material being used. Samples of material delivered to Project site will be taken, identified, sealed, and certified in presence of Contractor.
 - 2. Testing agency will perform tests for compliance of water-repellent material with product requirements.
 - 3. Owner may direct Contractor to stop applying water repellents if test results show material being used does not comply with product requirements. Contractor shall remove noncomplying material from Project site, pay for testing, and correct deficiency of surfaces treated with rejected materials, as approved by Engineer.

- B. Coverage Test: In the presence of Engineer, hose down a dry, repellent-treated surface to verify complete and uniform product application. A change in surface color will indicate incomplete application.
 - 1. Notify Engineer seven days in advance of the dates and times when surfaces will be tested.
 - 2. Reapply water repellent until coverage test indicates complete coverage.

3.5 CLEANING

- A. Immediately clean water repellent from adjoining surfaces and surfaces soiled or damaged by water-repellent application as work progresses. Correct damage to work of other trades caused by water-repellent application, as approved by Engineer.
- B. Comply with manufacturer's written cleaning instructions.

END OF SECTION 071900

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Silicone joint sealants.
 - 2. Urethane joint sealants.

1.3 ACTION SUBMITTALS

- A. Product Data: For each joint-sealant product.
- B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.
- C. Samples for Verification: For each kind and color of joint sealant required, provide Samples with joint sealants in 1/2-inch- (13-mm-) wide joints formed between two 6-inch- (150-mm-) long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.
- D. Joint-Sealant Schedule: Include the following information:
 - 1. Joint-sealant application, joint location, and designation.
 - 2. Joint-sealant manufacturer and product name.
 - 3. Joint-sealant formulation.
 - 4. Joint-sealant color.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified testing agency.
- B. Product Test Reports: For each kind of joint sealant, for tests performed by manufacturer and witnessed by a qualified testing agency.
- C. Field-Adhesion-Test Reports: For each sealant application tested.
- D. Sample Warranties: For special warranties.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An authorized representative who is trained and approved by manufacturer.
- B. Product Testing: Test joint sealants using a qualified testing agency.
 - 1. Testing Agency Qualifications: Qualified according to ASTM C 1021 to conduct the testing indicated.
- C. Mockups: Install sealant in mockups of assemblies specified in other Sections that are indicated to receive joint sealants specified in this Section. Use materials and installation methods specified in this Section.

1.6 FIELD CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:
 - 1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below 40 deg F (5 deg C).
 - 2. When joint substrates are wet.
 - 3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
 - 4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.7 WARRANTY

- A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 - 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Manufacturer's Warranty: Manufacturer agrees to furnish joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 - 1. Warranty Period: Five years from date of Substantial Completion.
- C. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:
 - 1. Movement of the structure caused by stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
 - 2. Disintegration of joint substrates from causes exceeding design specifications.
 - 3. Mechanical damage caused by individuals, tools, or other outside agents.

4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS

2.1 JOINT SEALANTS, GENERAL

- A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.
- B. Colors of Exposed Joint Sealants: As selected by Engineer from manufacturer's full range.

2.2 SILICONE JOINT SEALANTS

- A. Silicone, S, NS, 25, T, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 25, Uses T and NT.
- B. Silicone, S, P, 25, T, NT: Single-component, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade P, Class 25, Uses T and NT.

2.3 URETHANE JOINT SEALANTS

- A. Urethane, M, NS, 25, T, NT: Multicomponent, nonsag, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C 920, Type M, Grade NS, Class 25, Uses T and NT.
- B. Urethane, M, P, 25, T, NT: Multicomponent, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C 920, Type M, Grade P, Class 25, Uses T and NT.

2.4 JOINT-SEALANT BACKING

- A. Sealant Backing Material, General: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin) or any of the preceding types, as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.

- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.5 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
 - 2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:
 - a. Concrete.
 - b. Masonry.
 - 3. Remove laitance and form-release agents from concrete.

- B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.
- D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 - 1. Remove excess sealant from surfaces adjacent to joints.
 - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 - 3. Provide concave joint profile per Figure 8A in ASTM C 1193 unless otherwise indicated.

3.4 FIELD QUALITY CONTROL

- A. Field-Adhesion Testing: Field test joint-sealant adhesion to joint substrates as follows:
1. Extent of Testing: Test completed and cured sealant joints as follows:
 - a. Perform 10 tests for the first 1000 feet (300 m) of joint length for each kind of sealant and joint substrate.
 - b. Perform one test for each 1000 feet (300 m) of joint length thereafter or one test per each floor per elevation.
 2. Test Method: Test joint sealants according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C 1193 or Method A, Tail Procedure, in ASTM C 1521.
 - a. For joints with dissimilar substrates, verify adhesion to each substrate separately; extend cut along one side, verifying adhesion to opposite side. Repeat procedure for opposite side.
 3. Inspect tested joints and report on the following:
 - a. Whether sealants filled joint cavities and are free of voids.
 - b. Whether sealant dimensions and configurations comply with specified requirements.
 - c. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each kind of product and joint substrate. Compare these results to determine if adhesion complies with sealant manufacturer's field-adhesion hand-pull test criteria.
 4. Record test results in a field-adhesion-test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant material, sealant configuration, and sealant dimensions.
 5. Repair sealants pulled from test area by applying new sealants following same procedures used originally to seal joints. Ensure that original sealant surfaces are clean and that new sealant contacts original sealant.
- B. Evaluation of Field-Adhesion-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.5 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.6 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

END OF SECTION 079200

SECTION 321723 - PAVEMENT MARKINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes painted markings applied to concrete pavement.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include technical data and tested physical and performance properties.
- B. Shop Drawings: For pavement markings.
 - 1. Indicate pavement markings, colors, lane separations, defined parking spaces, and dimensions to adjacent work.
 - 2. Indicate, with international symbol of accessibility, spaces allocated for people with disabilities.
- C. Samples: For each exposed product and for each color and texture specified; on rigid backing, 8 inches (200 mm) square.

1.4 QUALITY ASSURANCE

- A. Regulatory Requirements: Comply with materials, workmanship, and other applicable requirements of VDOT for pavement-marking work.
 - 1. Measurement and payment provisions and safety program submittals included in standard specifications do not apply to this Section.

1.5 FIELD CONDITIONS

- A. Environmental Limitations: Proceed with pavement marking only on clean, dry surfaces and at a minimum ambient or surface temperature of 40 deg F (4.4 deg C) for alkyd materials, and not exceeding 95 deg F (35 deg C).

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Accessibility Standard: Comply with applicable provisions in the USDOJ's "2010 ADA Standards for Accessible Design" and ICC A117.1.

2.2 PAVEMENT-MARKING PAINT

- A. Pavement-Marking Paint: Alkyd-resin type, lead and chromate free, ready mixed, complying with AASHTO M 248, Type S; colors complying with FS TT-P-1952.
 - 1. Color: Yellow.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that pavement is dry and in suitable condition to begin pavement marking according to manufacturer's written instructions.
- B. Proceed with pavement marking only after unsatisfactory conditions have been corrected.

3.2 PAVEMENT MARKING

- A. Do not apply pavement-marking paint until layout, colors, and placement have been verified with Engineer.
- B. Sweep and clean surface to eliminate loose material and dust.
- C. Apply paint with mechanical equipment to produce pavement markings, of dimensions indicated, with uniform, straight edges. Apply at manufacturer's recommended rates to provide a minimum wet film thickness of 15 mils (0.4 mm).
 - 1. Apply graphic symbols and lettering with paint-resistant, die-cut stencils, firmly secured to pavement. Mask an extended area beyond edges of each stencil to prevent paint application beyond stencil. Apply paint so that it cannot run beneath stencil.

3.3 PROTECTING AND CLEANING

- A. Protect pavement markings from damage and wear during remainder of construction period.
- B. Clean spillage and soiling from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

END OF SECTION 321723